
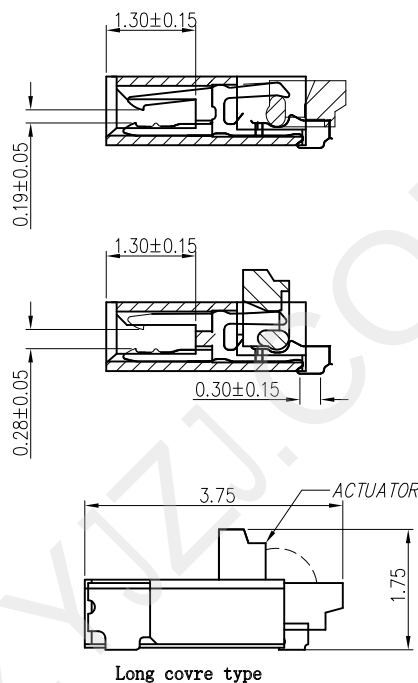
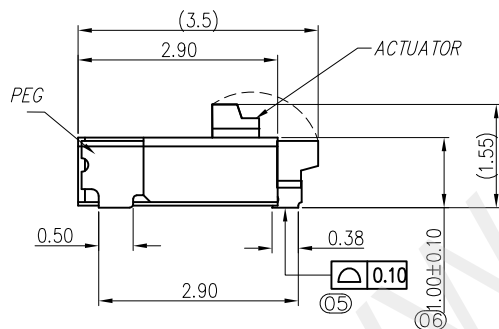
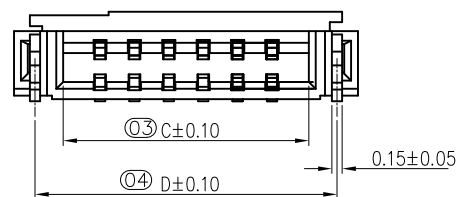


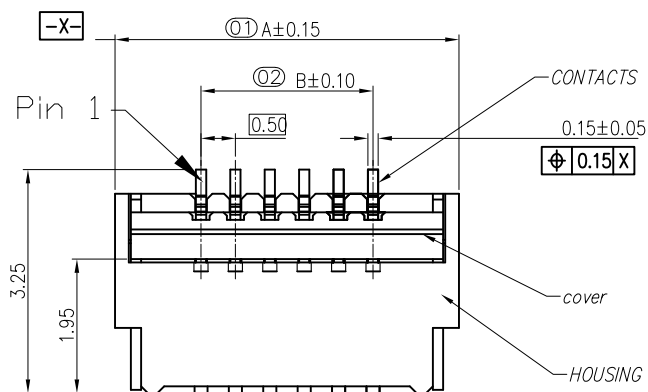

NOTE:

1. MATERIAL:

HOUSING: LCP (UL94V-0), COLOR: NATURAL.

CONTACTS: COPPER ALLOY.

PEG: COPPER ALLOY.

ACTUATOR: LCP (UL94-V0). COLOR: BLACK

2. RATING:

OPERATING VOLTAGE: 50Vrms AC.

CURRENT RATING: 0.5A.

OPERATING TEMPERATURE: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

OPERATING HUMIDITY RANGE: RELATIVE HUMIDITY 90% MAX.(NO CONDENSATION)


STORAGE TEMPERATURE RANGE: $-10^{\circ}\text{C} \sim +50^{\circ}\text{C}$.

STORAGE HUMIDITY RANGE: RELATIVE HUMIDITY 90% MAX.(NO CONDENSATION)



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$ 

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

0.5PH 1.0H 前插后压 FPC

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC4D-05FPCXX-100

MOLD NO.

APPROVED BY:

邱敏

DATE :



2014-02-23

DRAW NO:

HYC-2403111524

SHEET NO.

1 OF 1

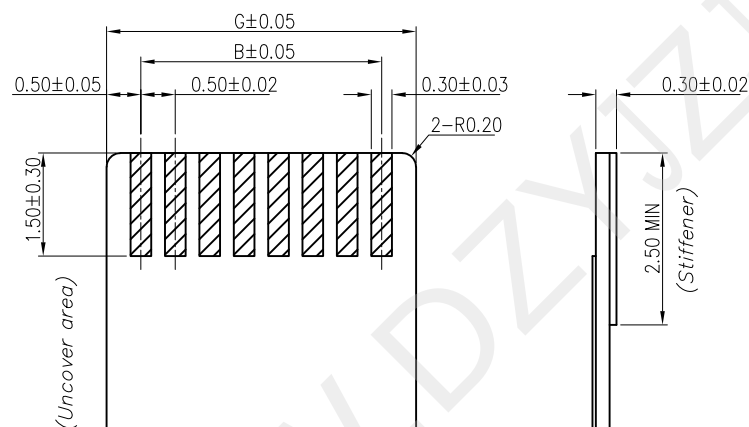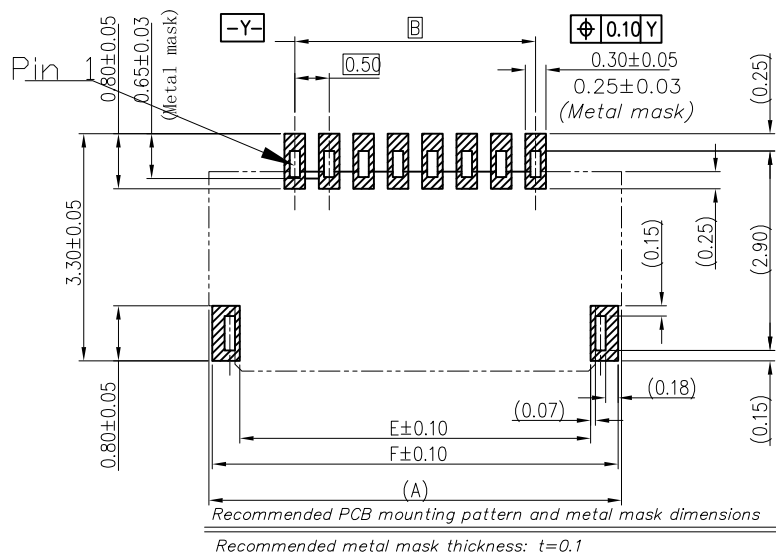

40	22.00	19.50	20.57	21.39	21.10	21.90	20.50
34	19.00	16.50	17.57	18.39	18.10	18.90	17.50
32	18.00	15.50	16.57	17.39	17.10	17.90	16.50
30	17.00	14.50	15.57	16.39	16.10	16.90	15.50
28	16.00	13.50	14.57	15.39	15.10	15.90	14.50
26	15.00	12.50	13.57	14.39	14.10	14.90	13.50
24	14.00	11.50	12.57	13.39	13.10	13.90	12.50
22	13.00	10.50	11.57	12.39	12.10	12.90	11.50
20	12.00	9.50	10.57	11.39	11.10	11.90	10.50
18	11.00	8.50	9.57	10.39	10.10	10.90	9.50
16	10.00	7.50	8.57	9.39	9.10	9.90	8.50
14	9.00	6.50	7.57	8.39	8.10	8.90	7.50
12	8.00	5.50	6.57	7.39	7.10	7.90	6.50
10	7.00	4.50	5.57	6.39	6.10	6.90	5.50
8	6.00	3.50	4.57	5.39	5.10	5.90	4.50
6	5.00	2.50	3.57	4.39	4.10	4.90	3.50
5	4.5	2.00	3.07	3.89	3.60	4.50	3.00
4	4.00	1.50	2.57	3.39	3.10	3.90	2.50
Number of Contacts	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G



深圳市华宇创精密电子有限公司

TOLERANCE:
X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X.X' ±2" X.X" ±0.5"

UNIT: mm [inch]
SCALE: 1:1 SIZE: A4

DRAWN BY :
陈一鸣

CHECKED BY:
马跃

APPROVED BY:
邱敏

DATE :
2014-02-23

DATE :
2014-02-23

DATE :
2014-02-23


PART NAME:
0.5PH 1.0H 前插后压 FPC

PART NO.
HYC4D-05FPCXX-100




MOLD NO.

DRAW NO:
HYC-2403111524

SHEET NO.
1 OF 1

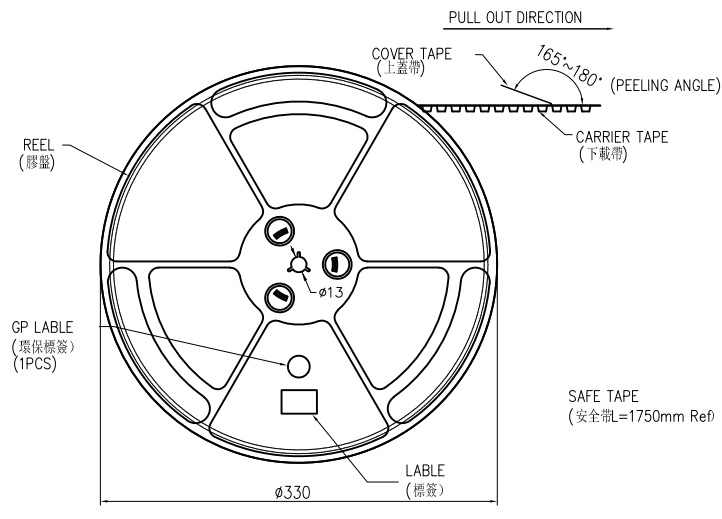


SCALE 1:4

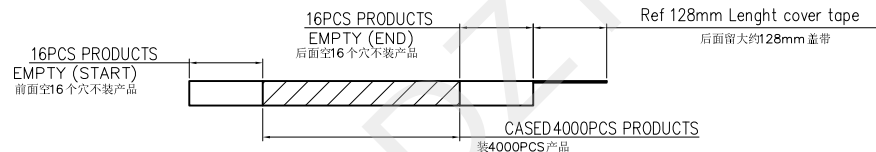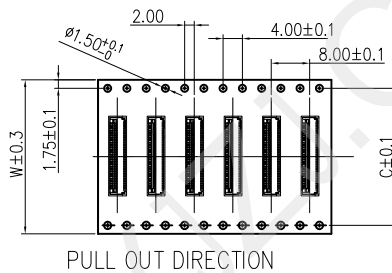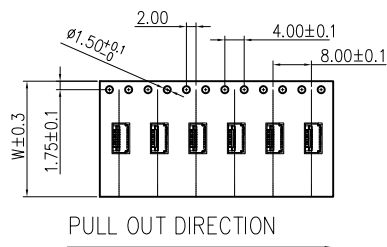

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm in 100mm.
3. Material: black conductive polystyrene alloy.
4. Material Thickness: 0.3 ± 0.05 mm.
5. All dimensions meet EIA-481-B requirements.
6. 4000pcs Pef Reel.
7. For tape width (dim W) 16 and 24mm pilot holes are provided on one sides.
For tape width (dim W) 32, 44 and 56mm pilot holes are provided on both sides.

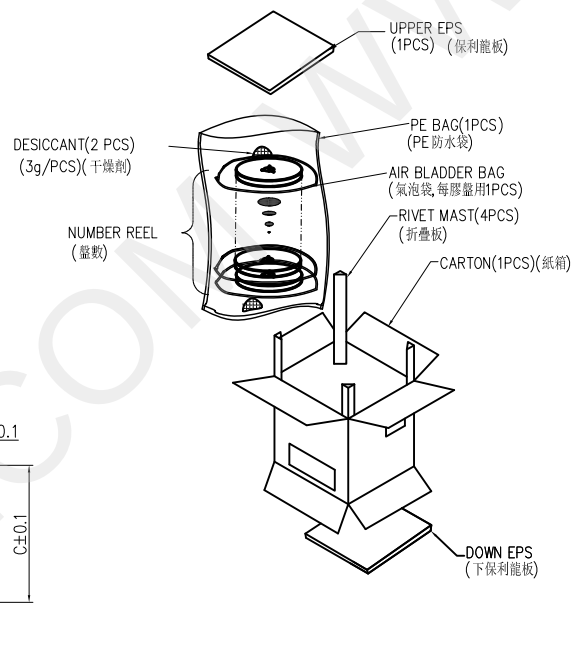

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
04PIN~12PIN	16	-	4000	15	60000
14PIN~28PIN	24	-	4000	10	40000
30PIN~34PIN	32	28.4	4000	8	32000
40Pin	44	40.4	4000	6	24000



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' ± 2 X.X' ± 0.5 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1