



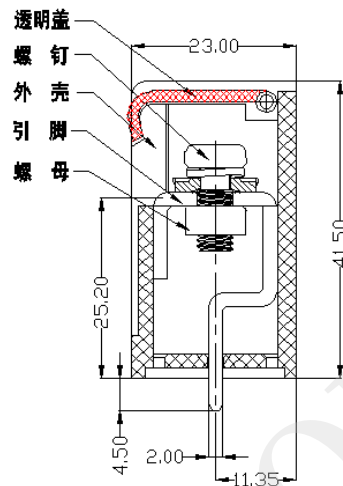

位数 (N)	2	3	4	5	6	7	8	9	10	11
长度 (L)	29	43.5	58	72.5	87	101.5	116	130.5	145	159.5
位数 (N)	12	13	14	15	16	17	18	19	20	21
长度 (L)	174	188.5	203	217.5	232	246.5	261	275.5	290	304.5

序号 (No.)	名称 (Name)	材质 (Material)	表面处理 (Surface Treatment)	数量 (Amount)
(1)	外壳 (Main Housing)	PBT (UL94, V-0)		1
(2)	引脚 (Terminal)	黄铜 (Brass)	镀锡 (Tin Plating)	XX
(3)	螺钉 (Assembly Screw)	钢材 (Steel)	镀镍 (Ni Plating)	XX
(4)	螺母 (Nut)	钢材 (Steel)	镀镍 (Nickel Plating)	XX
(5)	透明盖 (Defend Cover)	PC (UL94 V-0)		1

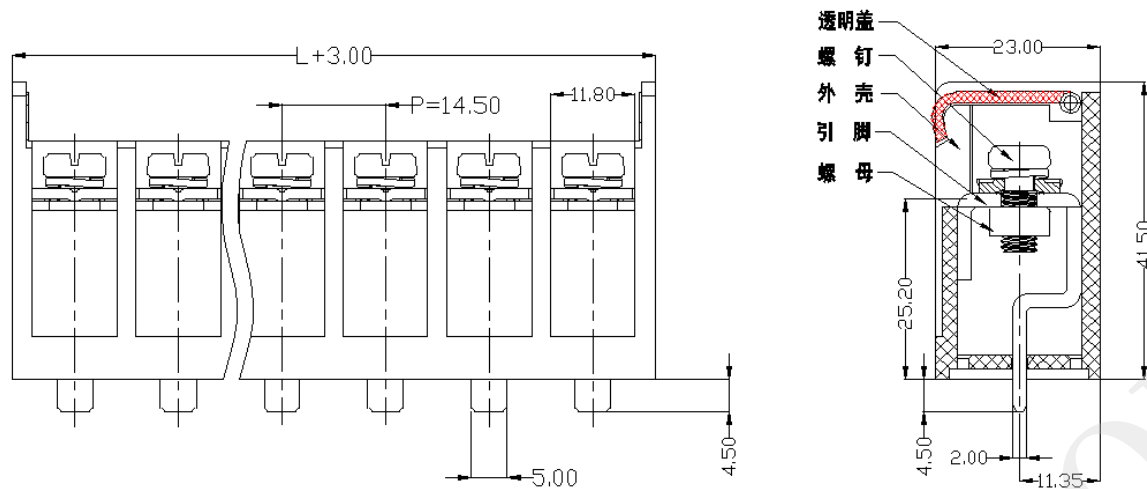

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2"

X.X' ±0.5'

UNIT: mm [inch]

SCALE:1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NAME:

接线端子 14.5PH直针翻盖

PART NO.

HYC110-JXDXX-1450

MOLD NO.

DRAW NO:

HYC-2104271023

SHEET NO.

1 OF 1