

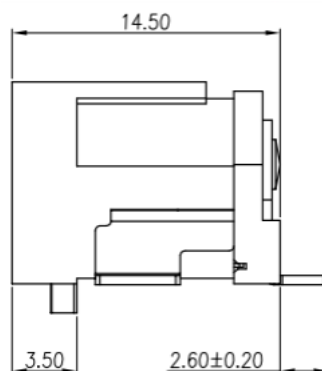
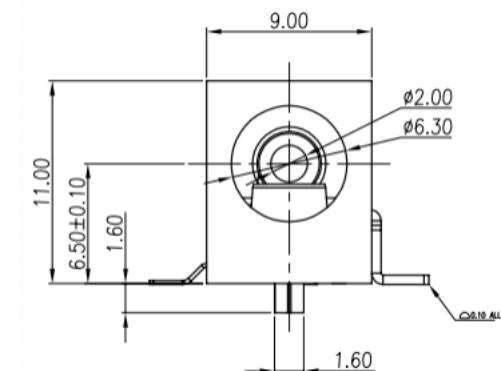
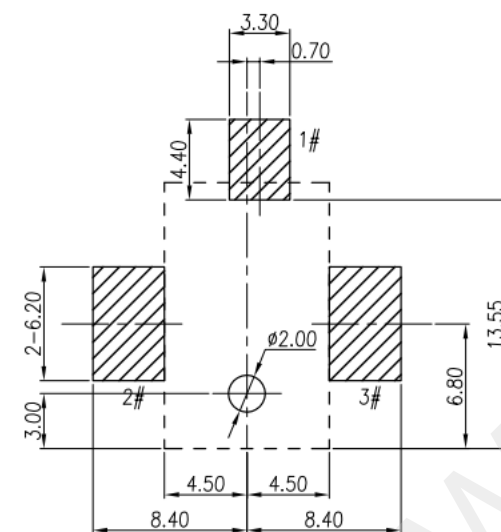



MATING PLUG

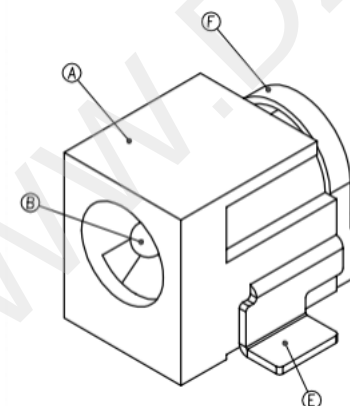

RECOMMENDED PCB LAYOUT T=1.60mm
GENERAL TOLERANCE:0.05mm
TOP VIEW

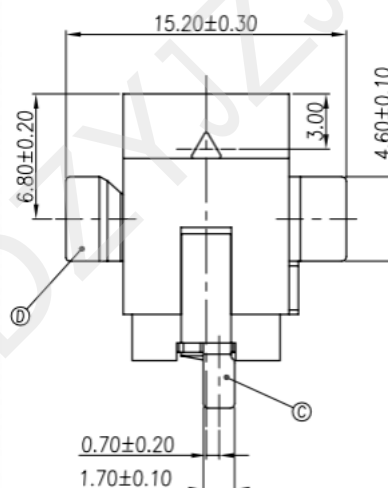

SPECIFICATIONS:

1. RATING: 24V, 5.0A
2. CONTACT RESISTANCE: 30 m Max.
3. INSULATION RESISTANCE: 100MΩ Min. (DC500V)
4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC;
5. INSERTION AND EXTRACTION FORCE : 0.3~3.0Kg .
6. LIFE TEST: 5,000 CYCLES.
6. TERMINAL STRENGTH: ANY DIRECTION FOR 10 SECONDS 500gf.
7. OPERATING TEMPERATURE: -25°C~+85°C.
8. WAVE SOLDERING: 260±5°C, TIME 5±5 SECONDS.
9. PART MUST COMPLY ROHS SPECIFICATION.

F	COVER	1	PA10T	BLACK
E	TERMINAL 3#	1	BRASS	Silver
D	TERMINAL 2#	1	COPPER ALLOY	Silver
C	TERMINAL 1#	1	BRASS	Silver
B	CENTER PIN	1	COPPER	Nicker
A	HOUSING	1	PA10T	BLACK
NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X: ±2" X:X ±0.5"				DC-088A 单定位柱	
 UNIT: mm [inch]		CHECKED BY:	DATE :	PART NO.	HYC-DC088A-200
		马跃	2014-02-23	MOLD NO.	
SCALE: 1:1 SIZE: A4		APPROVED BY:	DATE :	DRAW NO:	HYC-2603031646
		邱敏	2014-02-23	SHEET NO.	1 OF 1