
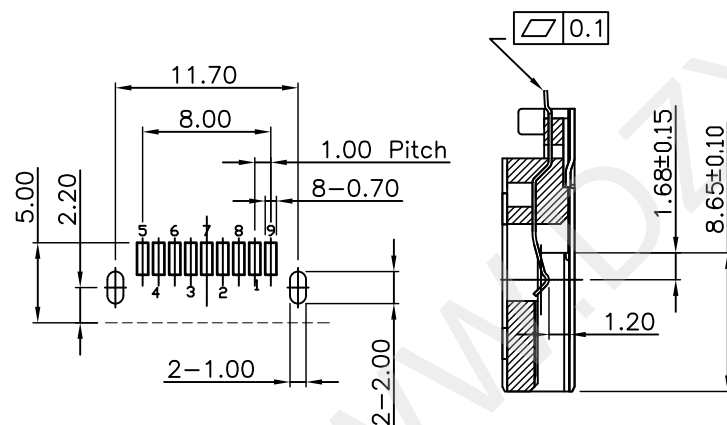
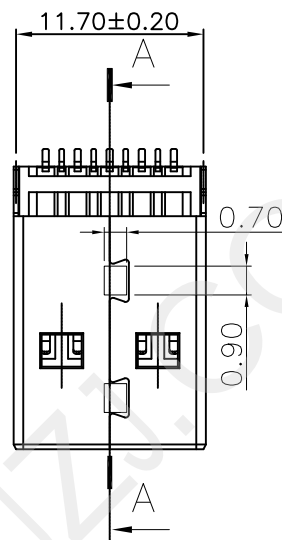


Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
ShellShield	

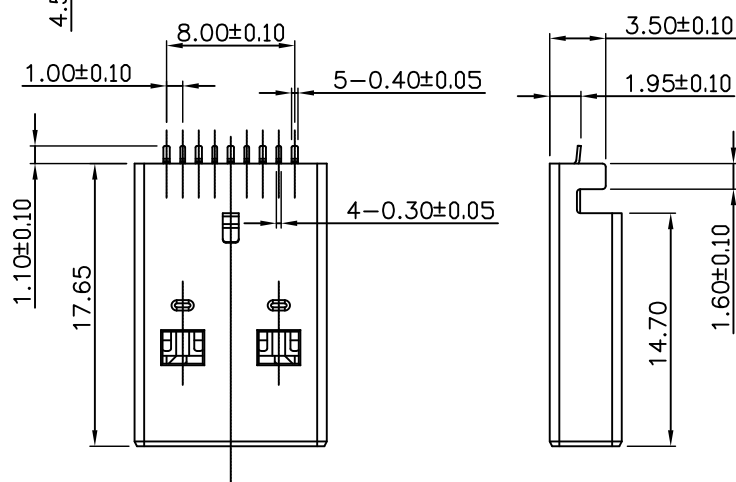

SECTION "A-A"

Notes:

1) Material:

Insulator : Thermoplastic G.F. UL94V-0,BULE
Contacts : Copper Alloy
Shell : SPCC

2) Environmental :

-55°C to +105°C

3) Electrical

Voltage : 30VAC(R.M.S)
Current Rating : 1.5 Ampere Min.
Contact resistance : 30 Milliohms Max.
Insulation resistance : 100 Megohms Min.
Dielectric withstanding voltage : 500 VAC

4) Finish

Shell : 50u" min. Nickel
Contacts : 1~30u" min. Gold on mating area.
100u" min. Tin on the tails.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB 3.0 AM 沉板1.9 L=17.6 无柱	
 UNIT: mm [inch]		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HVC180-USBA09-190
		APPROVED BY:	DATE :	MOLD NO.	
		DRAW NO:	HVC-2603201130		
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1