
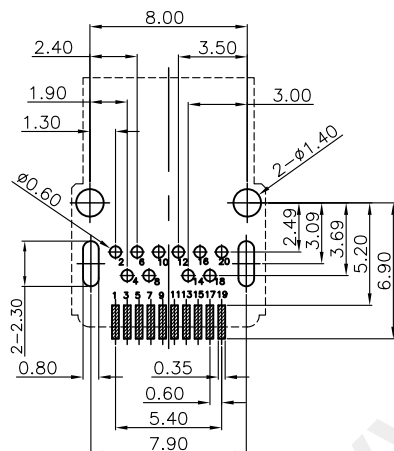



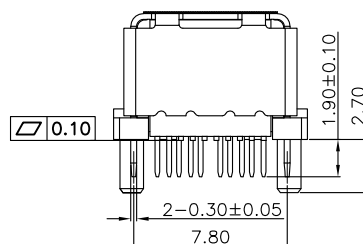
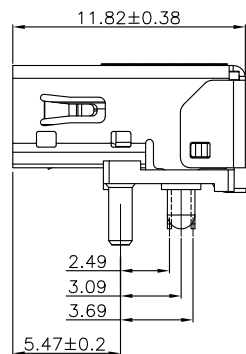


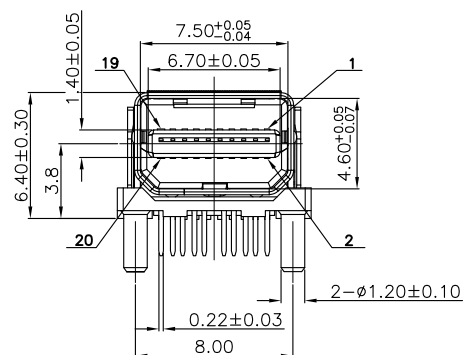

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05
TOP VIEW

MATERIALS

1. HOUSING : LCP, BLACK.
2. TERMINAL : COPPER ALLOY (T=0.20mm)
PLATING: SELECTIVE GOLD ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS,
UNDER NICKEL PLATED OVERALL.
3. SHELL : STAINLESS STEEL (T=0.30mm)
PLATING: NICKEL PLATED OVERALL.
4. COVER: LCP, BLACK.
5. MYLAR: POLYESTER FILM.




SPECIFICATION

1. CURRENT RATING : 0.5A MAX
2. CONTACT RESISTANCE : 30mΩ MAX.
3. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
4. INSULATION RESISTANCE : 100MΩ MIN AT 500V DC.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. DURABILITY : 10000 CYCLES.
7. MATING FORCE : 4.5Kgf MAX.
8. UNMATING FORCE : 1.0Kgf~4.0Kgf.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." $\pm 2^{\circ}$ X.X" $\pm 0.5^{\circ}$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MINI DP SMT式母座(中心高3.8)	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC29-MDP20-038	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2603301420	SHEET NO. 1 OF 1

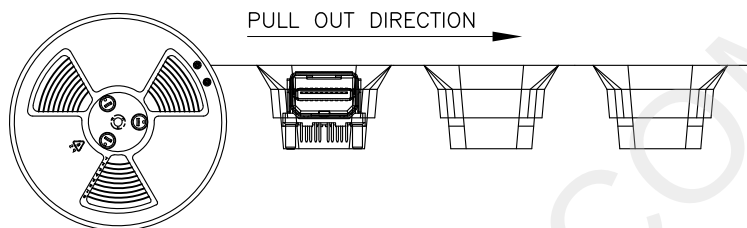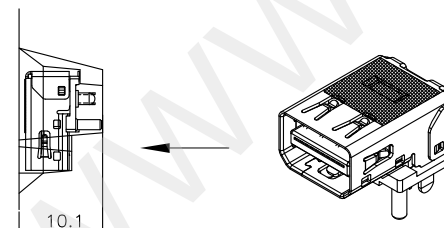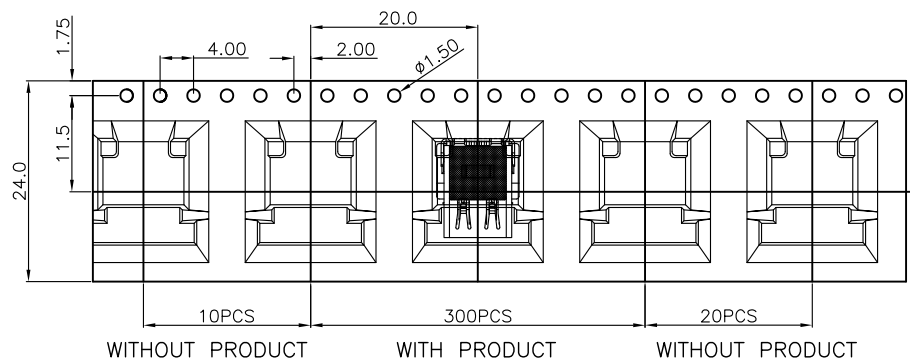


PACKAGE

1. SIZE :



REEL : DIA.=330mm
CORTON : 350x350x340mm (LxWxH)

2. QUANTITY :


300 PCS/REEL
11 REEL/CARTON = 3300PCS




PRODUCT

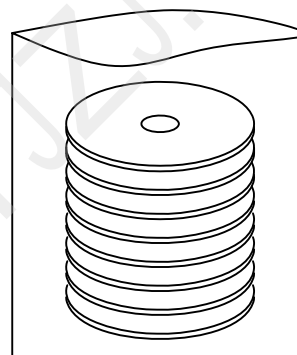

BAG



CARTON

 深圳市华宇创精密电子有限公司				
TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*	DRAWN BY :	DATE :	PART NAME:	
	陈一鸣	2014-02-23	包装图	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE :	PART NO.	
	马跃	2014-02-23	MOLD NO.	
	APPROVED BY:	DATE :	DRAW NO:	
	邱敏	2014-02-23	SHEET NO.	1 OF 1