

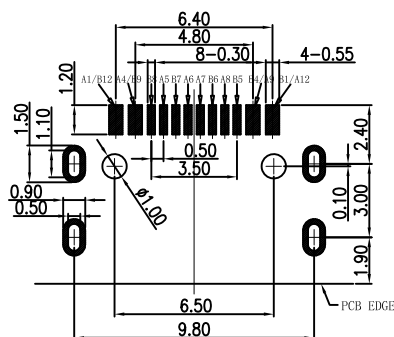


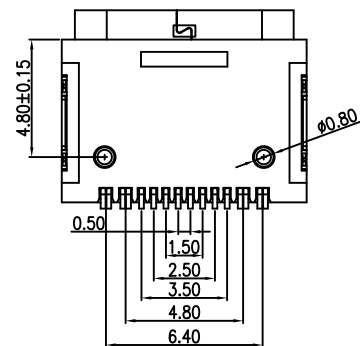

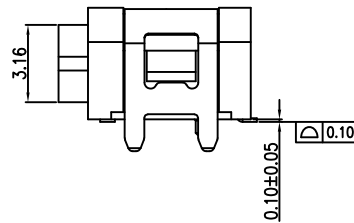


NOTES:

1. CURRENT RATING:
5.0A MAX.
2. DIELECTRIC WITHSTAND VOLTAGE:
100VAC.
3. TEMPERATURE RANGE:
-30 °C ~ 85 °C.
4. CONTACT RESISTANCE:
40 MILLIONHM MAX.
5. INSULATION RESISTANCE:
100 MEGOHMS MIN.
6. INSERTION FORCE :
5N~20N.
7. UNMATING FORCE:
8N~20N.
8. DURABILITY:
10,000 CYCLES.
9. WATERPROOF RATING: IPX7.
10. ALL PRODUCTS COMPLY WITH RoHS ENVIRONMENTAL REQUIREMENTS.
- 11: MARK "▲" AS THE FOCUS, FIRST ITEM INSPECTION.
- 12: MARK "XX" TO MEASURE DIMENSIONS FOR FAI.

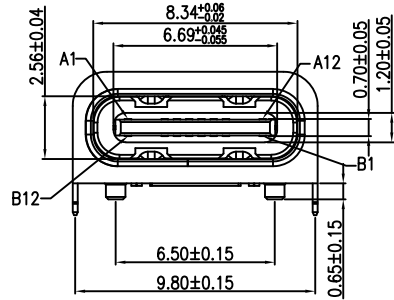

防水圈:

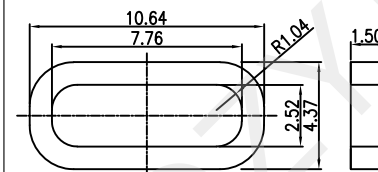

- 1: 材料: 黑色硅胶, 符合ROHS环境管理物质.
2: 尺寸: 外径:10.64*4.86*1.50mm.

RECOMMEND P. C. B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-	SUB1	VBUS			GND
GND			VBUS	SUB2	D-	D+	CC1	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

TABLE:

环氧树脂		
外壳	SUS304R-1/2H.T=0.20mm	Ni:30u"Min;
内壳	SUS304R-1/2H.T=0.30mm	Ni:30u"Min;
护套	PA9T(G.F30%) BLACK.	/
品名	中夹片	SUS301R-H.T=0.15mm
	上排MD	C2680R-H.T=0.15mm
	下排MD	C2680R-H.T=0.15mm
	塑胶	LCP(G.F30%) BLACK.
PART NAME	MATERIALS	FINISH



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 防水母座16P 板上SMT L=7.85 四脚DIP	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC759-USBC16-785	MOLD NO.
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2606101115	SHEET NO. 1 OF 1