
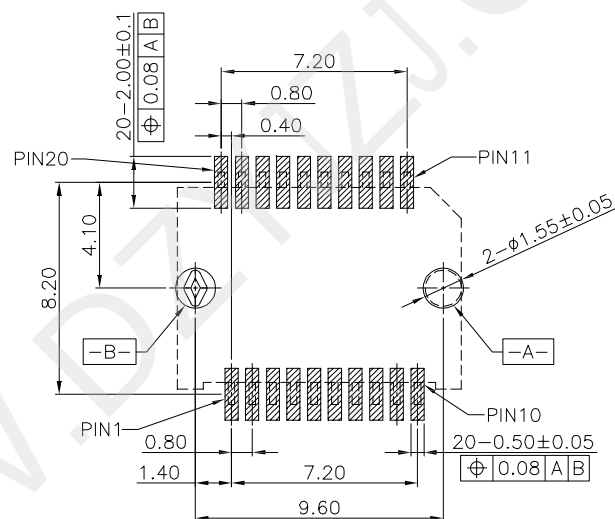
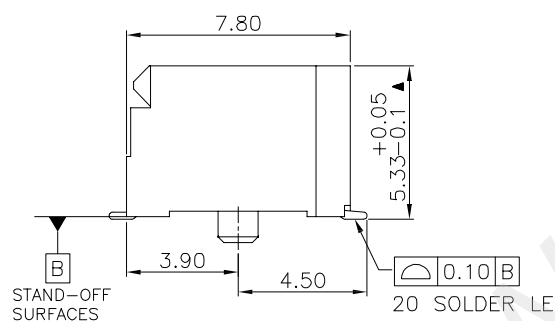
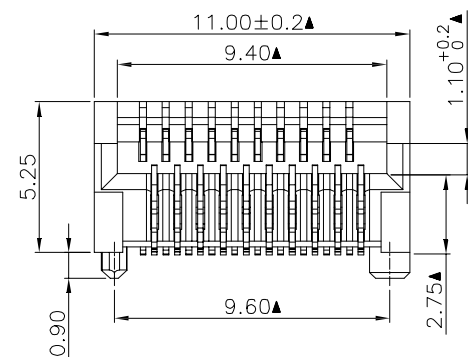
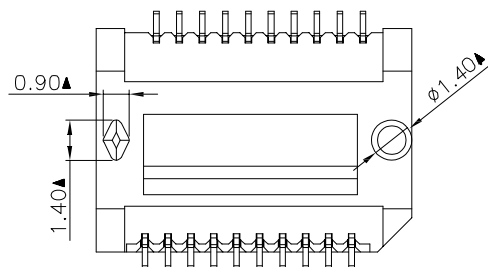


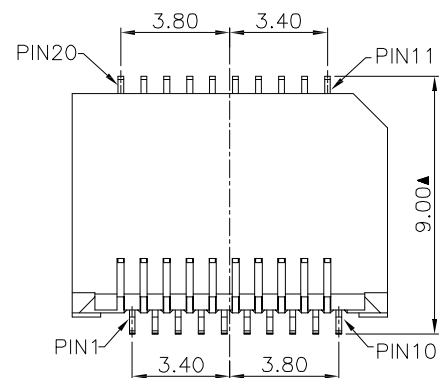

RECOMMENDED P.C.B. LAYOUT

GENERAL TOLERANCE: ± 0.05

说明：

1. 材质:

胶芯: LCP, UL94V-0; COLOR: BLACK
端子: C5191

2. 电镀说明:

端子：接触区域镀金15U
焊锡区域镀锡
全部区域镍底

3. 性能说明:

- 1) 额定电压: $\geq 120\text{VAC RMS}$.
- 2) 额定电流: $\geq 1.5\text{AMP}$
- 3) 接触电阻: $\leq 40\text{m}\Omega \text{ Max.}$
- 4) 绝缘电阻: $\geq 500\text{M}\Omega \text{ MIN.}$
- 5) 工作温度: $-40^{\circ}\text{C TO } +80^{\circ}\text{C}$.



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	SFP CAGE 1X1 20PIN	
X.XX ±0.25					
X.XXX ±0.15					
X.* ±2" X.X* ±0.5"		CHECKED BY:	DATE :	PART NO.	HYC10-SFP-960
		马跃	2014-02-23	MOLD NO.	
UNIT: mm [inch]				APPROVED BY:	DATE :
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1