
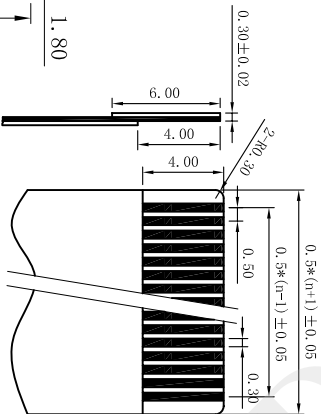
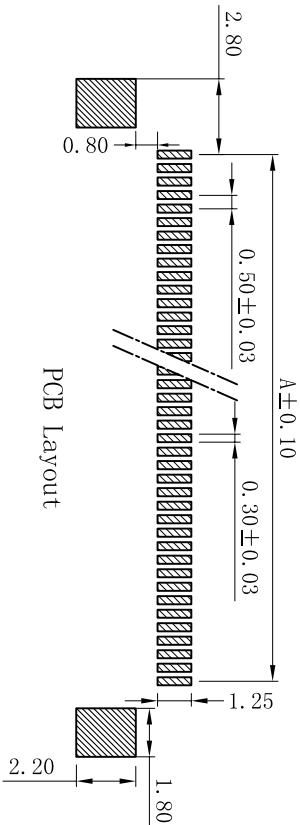
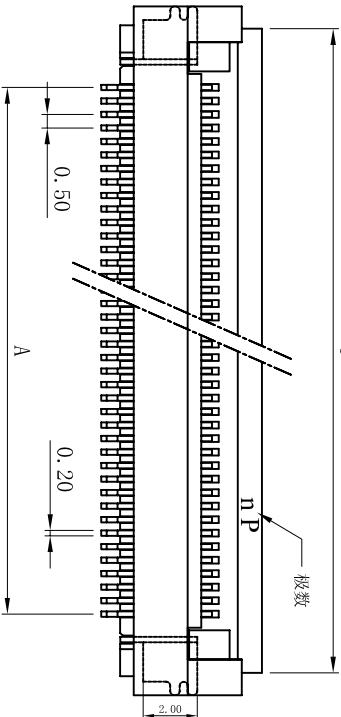



PITCH 0.5mm FPC CONNECTOR SMT TYPE

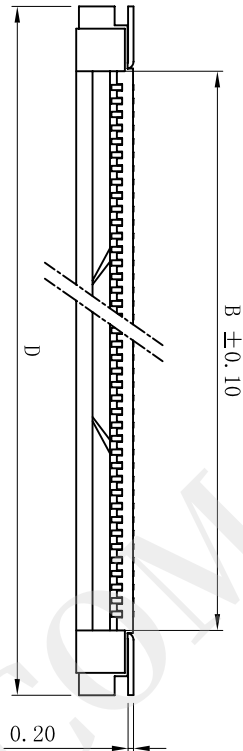

性能:

额定电流: 0.4A

额定电压: 50V

耐电压: 200V

接触电阻: ≤20mΩ

绝缘电阻: 500MΩ

工作温度: -20℃~+85℃

塑件 (材质): LCP本色, UL94V-0

锁扣 (材质): LCP黑色, UL94V-0

插簧 (材质): 磷青铜, 镀锡/镀金

焊片 (材质): 黄铜, 镀锡/镀金

适用扁平电缆

孔位	A	B	C	D
4	1.50	2.60	6.00	7.40
5	2.00	3.10	6.50	7.90
6	2.50	3.60	7.00	8.40
7	3.00	4.10	7.50	8.90
8	3.50	4.60	8.00	9.40
9	4.00	5.10	8.50	9.90
10	4.50	5.60	9.00	10.40
11	5.00	6.10	9.50	10.90
12	5.50	6.60	10.00	11.40
13	6.00	7.10	10.50	11.90
14	6.50	7.60	11.00	12.40
15	7.00	8.10	11.50	12.90
16	7.50	8.60	12.00	13.40
17	8.00	9.10	12.50	13.90
18	8.50	9.60	13.00	14.40
19	9.00	10.10	13.50	14.90
20	9.50	10.60	14.00	15.40
21	10.00	11.10	14.50	15.90
22	10.50	11.60	15.00	16.40
23	11.00	12.10	15.50	16.90
24	11.50	12.60	16.00	17.40
25	12.00	13.10	16.50	17.90
26	12.50	13.60	17.00	18.40
27	13.00	14.10	17.50	18.90
28	13.50	14.60	18.00	19.40
29	14.00	15.10	18.50	19.90
30	14.50	15.60	19.00	20.40
31	15.00	16.10	19.50	20.90
32	15.50	16.60	20.00	21.40
33	16.00	17.10	20.50	21.90
34	16.50	17.60	21.00	22.40
35	17.00	18.10	21.50	22.90
36	17.50	18.60	22.00	23.40
37	18.00	19.10	22.50	23.90
38	18.50	19.60	23.00	24.40
39	19.00	20.10	23.50	24.90
40	19.50	20.60	24.00	25.40
41	20.00	21.10	24.50	25.90
42	20.50	21.60	25.00	26.40
43	21.00	22.10	25.50	26.90
44	21.50	22.60	26.00	27.40
45	22.00	23.10	26.50	27.90
46	22.50	23.60	27.00	28.40
47	23.00	24.10	27.50	28.90
48	23.50	24.60	28.00	29.40
49	24.00	25.10	28.50	29.90
50	24.50	25.60	29.00	30.40
51	25.00	26.10	29.50	30.90
52	25.50	26.60	30.00	31.40
53	26.00	27.10	30.50	31.90
54	26.50	27.60	31.00	32.40
55	27.00	28.10	31.50	32.90
56	27.50	28.60	32.00	33.40
57	28.00	29.10	32.50	33.90
58	28.50	29.60	33.00	34.40
59	29.00	30.10	33.50	34.90
60	29.50	30.60	34.00	35.40

mstconn

SHEN ZHEN DE RUJ ELECTRONIC CO., LTD

0.5mm FPC 掀盖式 (D 型) 下接

0.5mm FPC 掀盖式 (D 型) 下接

050K12-C(U)B0000000

SCALE 1/1

SHEET 1/1

REV. A

DWG NO.: 050K12-C(U)B0000000

DATE: Y1Z.2011.09.28

DR: Y1Z.2011.09.28

Q'TY

FINISH

MAT'L

UNITS mm

X. ± 0.3

X.° ± 5°

.X ± 0.25

.X° ± 2°

.XX ± 0.20

.XX° ± 1°

.XXX ± 0.10

.XXX° ± 0.5°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUJ ELECTRONIC FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUJ ELECTRONIC FACTORY