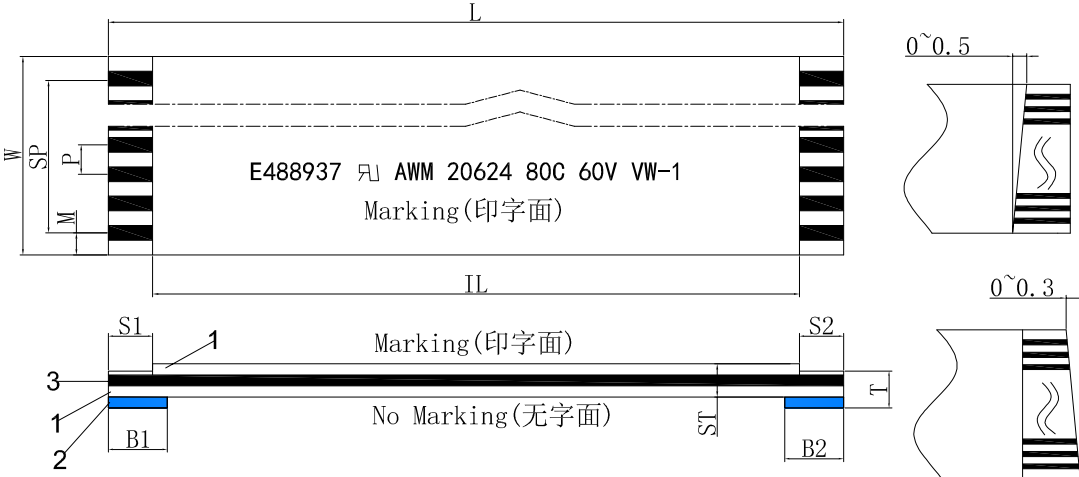



深圳市连线电子有限公司

客户承认图

CUSTOMER(客户):		Customer Part NO(客户物品号):																										
		Part Descripon(物品规格): PH0.5 接触面在同面系列 (0.5*N*L*A (S1/S2/B1/B2) (Ct*Cw))																										
Item	项目	Specification 规格值		 产品规格: ①* ② * ③ * ④ (⑤ / ⑥ / ⑦ / ⑧) (⑨ * ⑩) ⑪ ①: 间距0.5 ②: 导体芯数 ③: 总长度 ④: 型号 (A: 同面, B: 反面) ⑤: 线口S1长度 ⑥: 线口S2长度 ⑦: 补强板B1长度 ⑧: 补强板B2长度 ⑨: 导体厚度 (0.035/0.5) ⑩: 导体宽度 (0.3) ⑪: 镀锡/镀金 <table><tr><td rowspan="5">Total length L (总长度)</td><td>15~50</td><td>±1.5</td></tr><tr><td>51~100</td><td>±2.0</td></tr><tr><td>101~300</td><td>±3.0</td></tr><tr><td>301~800</td><td>±5.0</td></tr><tr><td>800以上</td><td>±10.0</td></tr></table> 印字内容: E488937 ㊞ AWM 20624 80C 60V VW-1 颜色: 蓝色 Storage condition:(储存条件) Recommended(推荐) Temp: 15°C~25°C(温度15°C~25°C)Humidity: 30~60RH%(湿度30~60RH%) Drawing Not To Scale Hidden Lines Not Shown 图规不能以其线材比来 衡量, 隐藏线不显示  Unit (单位): mm <table><tr><td>Discharge Date 发行日期</td><td>Review Date 修订日期</td><td>Drawing NO 图纸编号</td></tr><tr><td>2023. 04. 12</td><td></td><td></td></tr><tr><td>Drawing by 制图</td><td>Checked by 核对</td><td>Approved by 确认</td></tr><tr><td>Kent</td><td></td><td></td></tr></table>		Total length L (总长度)	15~50	±1.5	51~100	±2.0	101~300	±3.0	301~800	±5.0	800以上	±10.0	Discharge Date 发行日期	Review Date 修订日期	Drawing NO 图纸编号	2023. 04. 12			Drawing by 制图	Checked by 核对	Approved by 确认	Kent		
Total length L (总长度)	15~50	±1.5																										
	51~100	±2.0																										
	101~300	±3.0																										
	301~800	±5.0																										
	800以上	±10.0																										
Discharge Date 发行日期	Review Date 修订日期	Drawing NO 图纸编号																										
2023. 04. 12																												
Drawing by 制图	Checked by 核对	Approved by 确认																										
Kent																												
Q. of conductorsN	导体芯数 N	4~150																										
Pitch	间距 P	0.5±0.05																										
Total Pitch	全间距 SP	0.5*(N-1) ±0.05																										
Total Length	总长度 L	/																										
Insulation Length	绝缘长度 IL	(L-S1-S2)																										
Margin Width	边缘宽度 M	0.5±0.08																										
Total Width	总宽度 W	0.5*(N+1) ±0.08																										
Strip Length	线口长度 S1	≤4.0±0.5/>4.0±1.0																										
Strip Length	线口长度 S2	≤4.0±0.5/>4.0±1.0																										
Reinforeing tape length	补强板长度B1	≤6.0±1/>6.0±2.0																										
Reinforeing tape length	补强板长度B2	≤6.0±1/>6.0±2.0																										
Slanting	线口倾斜度 A	≤0.3																										
Over lap	冲孔	≤0.5																										
Terminal thickness	插入厚度 T	0.3±0.05																										
Thickness insulation	线身厚度 ST	±0.05																										
Conductor thickness	导体厚度 Ct	±0.005																										
Conductor width	导体宽度 Cw	±0.03																										
Supporting Tapc Color	补强板颜色	(Blue) 蓝																										
PET(Supporing Tapc Color)	补强板规格	0.16/0.205/0.225																										
PET(Insulation)	绝缘胶规格	0.043/0.06/0.1(有印字)																										
PET(Insulation)	绝缘胶规格	0.043/0.06/0.1(白色)																										
Rev	版本	A1																										