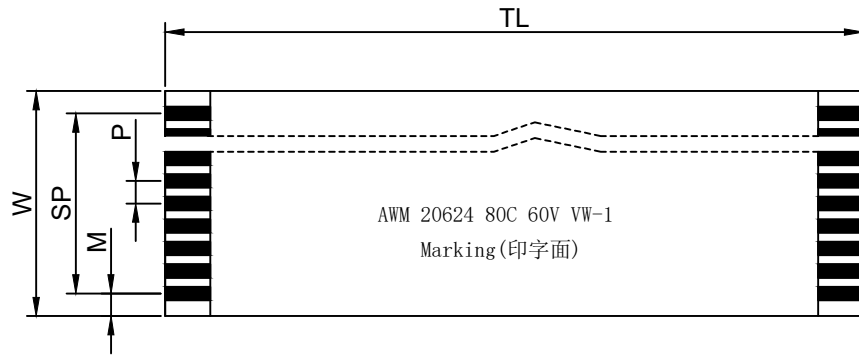


## 技术要求:

- 1、保存环境: 温度15~25℃ 湿度: 30~50RH%
- 2、保质期: 镀金: 12个月 镀锡: 6个月
- 3、产品符合ROHS 2.0标准

| STRUCTURE (构造) |                       |                      |           |        |
|----------------|-----------------------|----------------------|-----------|--------|
| NO.            | ITEM (项目)             | SPECIFICATION (规格)   |           |        |
| 1              | INSULATION (胶膜)       | 印字膜: 通用版20624 (43μm) |           |        |
|                |                       | 白膜: 80° C 60V (43μm) |           |        |
| 2              | SUPPORTING TAPE (补强板) | 225μm                | Blue (蓝色) |        |
| 3              | CONDUCTOR (导体)        | Thickness (厚度)       | 0.035     | ±0.005 |
|                |                       | Width (宽度)           | 0.65      | ±0.03  |
| 4              | CONDUCTOR (导体镀层)      | PLATED (电镀)          | 锡Sn (1μm) | MIN    |
|                |                       | PLATED (电镀)          |           |        |

| DIMENSION (尺寸)                 |    |         |                  |
|--------------------------------|----|---------|------------------|
| No. of conductors (导体数目)       | N  | ( N ) P |                  |
| Pitch (间距)                     | P  | 1.0     | ±0.06            |
| Span (总间距)                     | SP | (N-1)*1 | ±0.1             |
| Width (总宽度)                    | W  | (N+1)*1 | ±0.12            |
| Margin (边缘宽度)                  | M  | 1.0     | ±0.12            |
| Total length (总长度)             | TL | (TL)    | ±2.0             |
| Insert Thickness (插接端厚度)       | T  | 0.3     | ±0.05            |
| Surface Thickness (线身厚度)       | ST | 0.12    | ±0.03            |
| Strip Length (裸铜长度)            | S1 | 4.0     | 4/3可定做 ±0.5      |
|                                | S2 | 4.0     | 4/3可定做 ±0.5      |
| Supporting Tape Length (补强板长度) | B1 | 6.0     | 8/6/5/4/可定做 ±1.0 |
|                                | B2 | 6.0     | 8/6/5/4/可定做 ±1.0 |

|           |  |              |     |                                                                                       |                                                     |             |               |                                                                                       |
|-----------|--|--------------|-----|---------------------------------------------------------------------------------------|-----------------------------------------------------|-------------|---------------|---------------------------------------------------------------------------------------|
| DESIGN:   |  | Xiping Huang |     |  | 广东国连电子有限公司<br>GUANGDONG GUOLIAN ELECTRONICS CO.,LTD |             |               |                                                                                       |
| CHECK:    |  | Ke Tian      |     |                                                                                       |                                                     |             |               |                                                                                       |
| APPROVED: |  | Youquan Xu   |     | TITLE:<br><br>FFC CABLE A型                                                            |                                                     |             |               |                                                                                       |
| DIM       |  | TOL          | DIM |                                                                                       |                                                     |             | TOL           |                                                                                       |
| X.        |  | ±0.25        |     | PART NO.<br><br>1.0*NP*TL*A (3/3/5/5) (0.035*0.65)                                    |                                                     |             |               |                                                                                       |
| X. X      |  | ±0.20        |     |                                                                                       |                                                     |             |               |                                                                                       |
| X. XX     |  | ±0.15        |     |                                                                                       |                                                     |             |               |                                                                                       |
| X. XXX    |  |              |     |                                                                                       |                                                     |             |               |                                                                                       |
|           |  |              |     |                                                                                       |                                                     |             |               |                                                                                       |
| REV.      |  | A            |     | SCALE: N/A                                                                            |                                                     | UNIT:<br>mm | SHEET:<br>1/1 |  |