



版次	日期	变更内容	变更单号	变更者
1.0	13.9.9	原始版本		

B±0.1

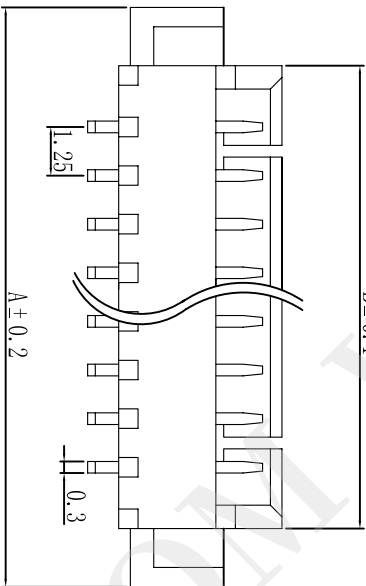

3±0.1



技术参数

额定电压: 125V AC DC

额定电流: 1A AC,DC

耐压值: 500V AC 1分钟minute

绝缘电阻: 100MΩ Min

接触电阻: 20mΩ Max

工作温度: -25℃~+85℃


间距: 1.25mm

材料

外壳: LCP米色






插针: 黄铜

2



20	29.9	27	23.75
19	28.65	25.75	22.5
18	27.4	24.5	21.25
17	26.15	23.25	20
16	24.9	22	18.75
15	23.65	20.75	17.5
14	22.4	19.5	16.25
13	21.15	18.25	15
12	19.9	17	13.75
11	18.65	15.75	12.5
10	17.4	14.5	11.25
9	16.15	13.25	10
8	14.9	12	8.75
7	13.65	10.75	7.5
6	12.4	9.5	6.25
5	11.15	8.25	5
4	9.9	7	3.75
3	8.65	5.75	2.5
2	7.4	4.5	1.25
Poles	A	B	C

C±0.05

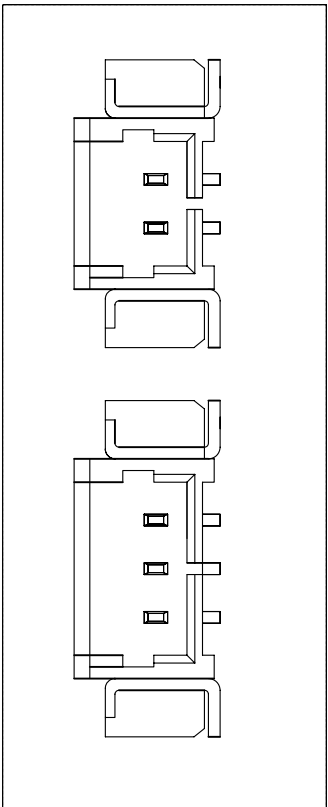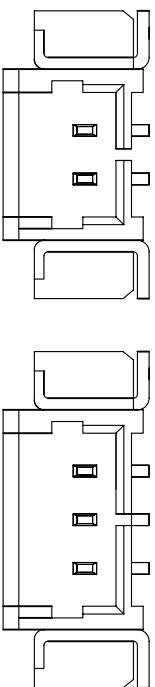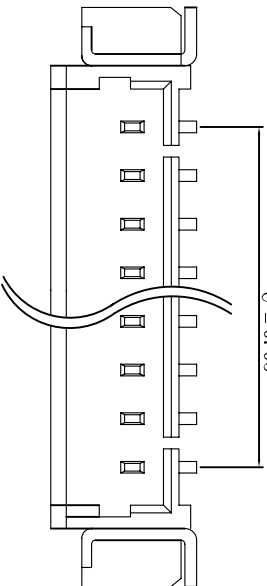

2		插针	黄铜		镀锡	
1		基座	LCP-U194V-O			
序号	图	号	名称	材料	数量	附注

1.25立贴

	绘制		图号	
	审查		比例	ITF
	核准		单位	mm
	供应商		页次	of

尺寸公差: ±0.1mm
角度公差: ±3°

