
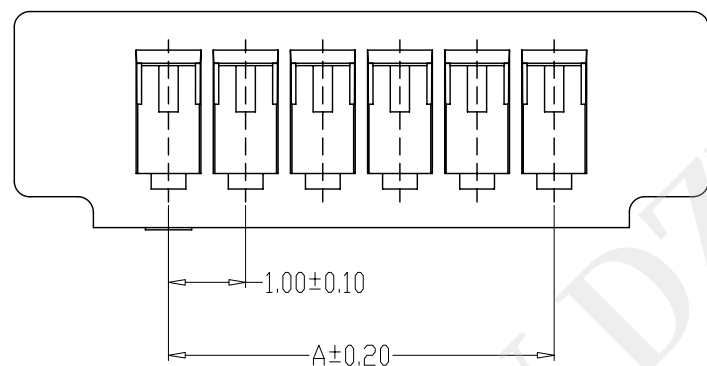
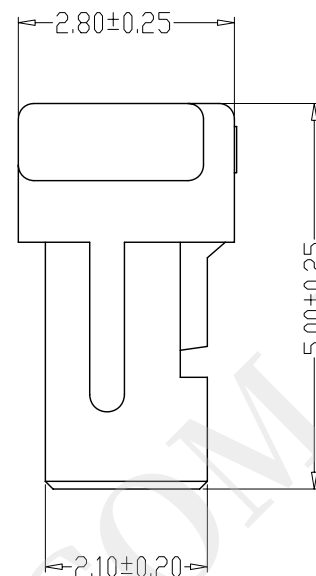


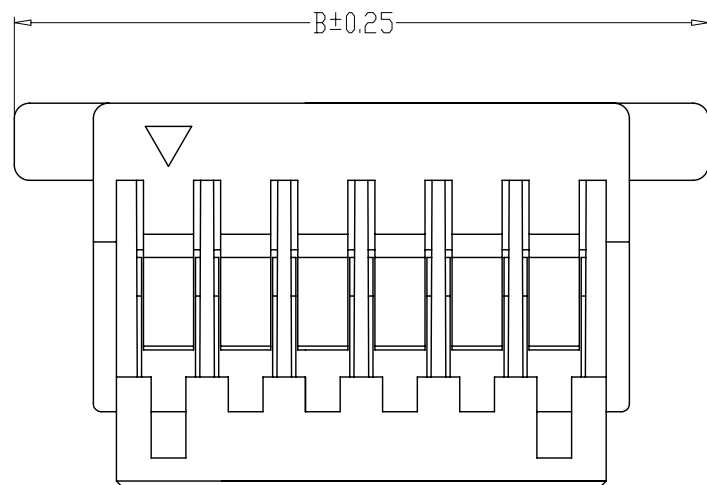

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 50V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material:PBT,UL94V-0

编 号	尺寸 (mm)	
	A	B
02	1.00	5.00
03	2.00	6.00
04	3.00	7.00
05	4.00	8.00
06	5.00	9.00
07	6.00	10.00
08	7.00	11.00
09	8.00	12.00
10	9.00	13.00
11	10.00	14.00
12	11.00	15.00
20	19.00	23.00

1002H-XXEP	PBT UL94V-0	1002W-E	1002T-E
PART NO	Material	Suitable Wafer	Suitable Terminal

_____		new		2015/5/3		A		瀚源	
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	1002H-XXEP	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X.	±0.25	
			MODEL NAME	H-1002H-XXEP			X.x	±0.20	
			3RD ANGLE PROJ	HanElectricity Co.,LTD		X.xx	±0.15	ANGULAR	
							FILE.NO.		