
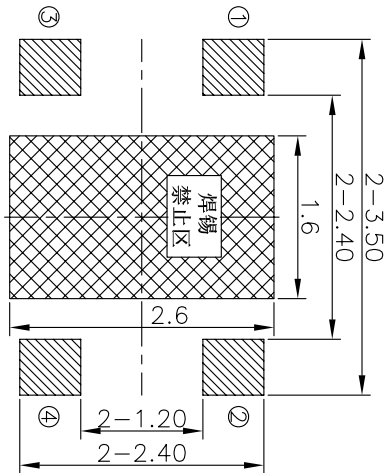
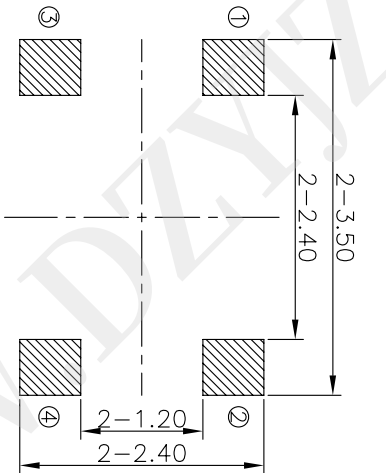

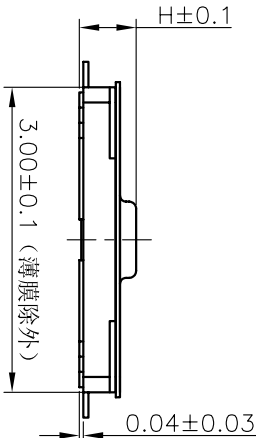
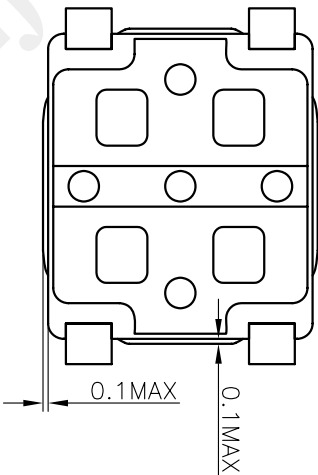



REV	ECN NO.	APPD
A	HC180067	ZO

规格 Specifications

额定负荷 Rating	DC 12V/50mA		
接触电阻 Contact Resistance	500mΩ max.		
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.		
抗电强度 Dielectric strength	AC250V(50~60Hz) 60S min.		
操作力 Operation force	≤180±30gf	≥240±50gf	
寿命试验 Operating Life	300,000 cycles	100,000 cycles	
行程 Travels	0.15±0.05mm		

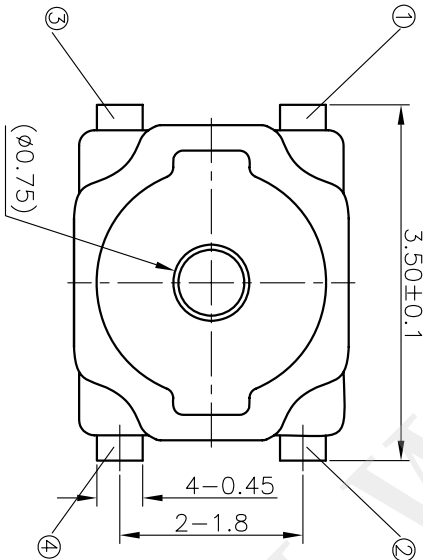

RECOMMENDED P.C.B. LAYOUT

安装尺寸图

LAND PATTERN PLAN

印刷电路板焊盘参考图

PRODUCT NO.: 1TS016A*****

轻触开关

3X2.6系列

外形:

A=四脚

B=四脚无按柄

按点颜色:

底座颜色:

贴膜颜色:

操作力度:

初始颜色

则不启用

脚距:

0=常规脚距3.5mm

1=特殊脚距3.2mm

依次增加

产品高度(H):

050=0.5mm

060=0.6mm

070=0.7mm

手感:

0=常规(弹片)

1=大手感(弹片)

2=小手感(弹片)

3=特殊手感(弹片)

其它:

CT=编带(非编带,不启用)

5	5	KNOB	1	POLYAMIDE	BLACK
4	4	FILM	1	POLYAMIDE	WHITE
3	3	DOMES	2	STAINLESS STEEL	Ag-PLATED
2	2	HOUSING	1	POLYAMIDE	BLACK
1	1	TERMINAL	1	PHOSPHOR BRONZE	Ag-PLATED
ITEM	PART NAME	QUANTITY	MATERIAL	FINISH	

X. ± 0.2	X. ± 3'	UNITS	MM	NAME(INTENDED USE)	HON YUAN
X. ± 0.1	X. ± 2'	MAT'L		3X2.6 SERIES	HON YUAN PRECISION IND. CO.,LTD.
.XX ± 0.05	.XX' ± 1'	FINISH		TACT SWITCHES	SHENZHEN, CHINA.
.XXX ± 0.03	.XXX' ± 0.5'			PART NO.(INTENDED USE)	TITLE:
				1TS016A*****	PRODUCT DRAWING

APPD: ZO 6/02/2018	DWG NO.: 1TS016A	SCALE SHEET	REV.
CHKD: M.H.LI 6/02/2018		25/1	1/1
DR: WP.LU 6/02/2018			A