
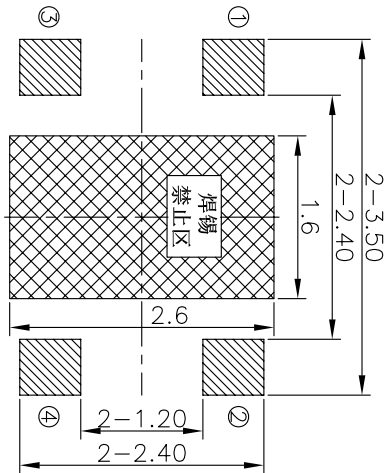
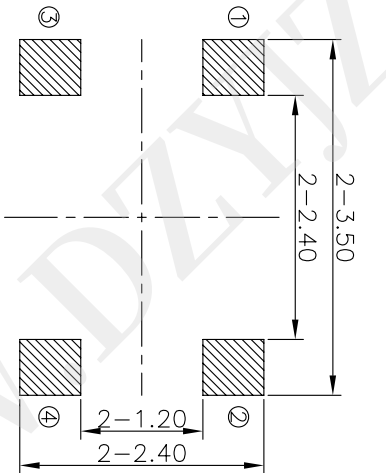

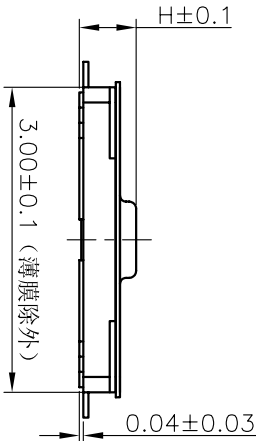
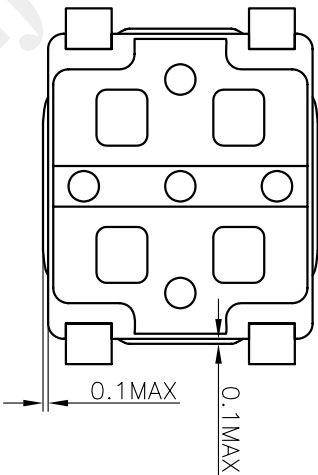



REV	ECN NO.	APPD
A	HC180067	ZO

规格 Specifications

额定负荷 Rating	DC 12V/50mA		
接触电阻 Contact Resistance	500mΩ max.		
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.		
抗电强度 Dielectric strength	AC250V(50~60Hz) 60S min.		
操作力 Operation force	≤180±30gf	≥240±50gf	
寿命试验 Operating Life	300,000 cycles	100,000 cycles	
行程 Travels	0.15±0.05mm		

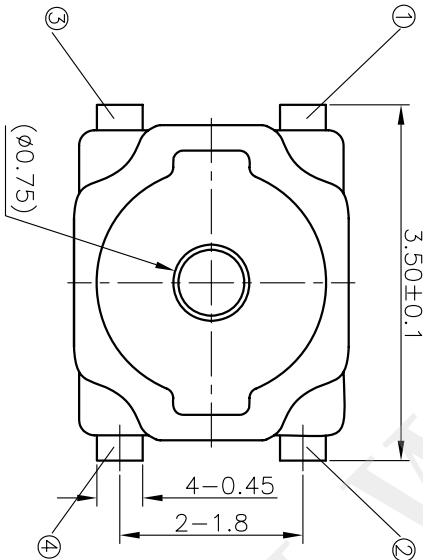

RECOMMENDED P.C.B. LAYOUT

安装尺寸图

LAND PATTERN PLAN

印刷电路板焊盘参考图

PRODUCT NO.: 1TS016A*****

轻触开关

3X2.6系列

外形:

A=四脚

B=四脚无按柄

按点颜色:

底座颜色:

贴膜颜色:

操作力度:

初始颜色

则不启用

脚距:

0=常规脚距3.5mm

1=特殊脚距3.2mm

依次增加

产品高度(H):

050=0.5mm

060=0.6mm

070=0.7mm

手感:

0=常规(弹片)

1=大手感(弹片)

2=小手感(弹片)

3=特殊手感(弹片)

其它:

CT=编带(非编带,不启用)

产品高度(H):

050=0.5mm

060=0.6mm

070=0.7mm

手感:

0=常规(弹片)

1=大手感(弹片)

2=小手感(弹片)

3=特殊手感(弹片)

5	5	KNOB	1	POLYAMIDE	BLACK
4	4	FILM	1	POLYAMIDE	WHITE
3	3	DOVE	2	STAINLESS STEEL	Ag-PLATED
2	2	HOUSING	1	POLYAMIDE	BLACK
1	1	TERMINAL	1	PHOSPHOR BRONZE	Ag-PLATED
ITEM	PART NAME	QUANTITY	MATERIAL	FINISH	
X. ± 0.2	X. ± 3'	UNITS	MM		
X. ± 0.1	X. ± 2'	MAT'L			
.XX ± 0.05	.XX' ± 1'	FINISH			
.XXX ± 0.03	.XXX' ± 0.5'				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON YUAN PRECISION IND. CO., LTD.					
Q'TY					
DR: WP.LU 6/02/2018					
APPD: ZO 6/02/2018					
CHKD: M.H.LI 6/02/2018					
SCALE SHEET	25/1	1/1	REV.		
PRODUCT DRAWING					
HON YUAN					
HON YUAN PRECISION IND. CO., LTD.					
SHENZHEN, CHINA.					
NAME(INTENDED USE)					
3X2.6 SERIES					
TACT SWITCHES					
PART NO.(INTENDED USE)					
1TS016A***-****-***0					
DWG NO.:					
1TS016A					