
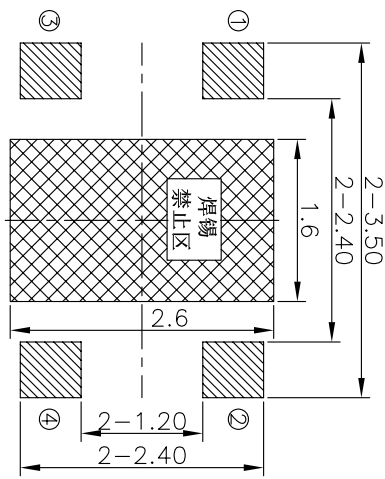
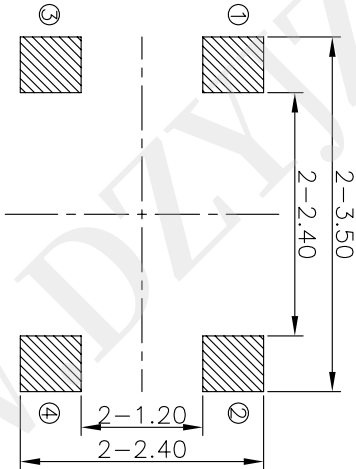

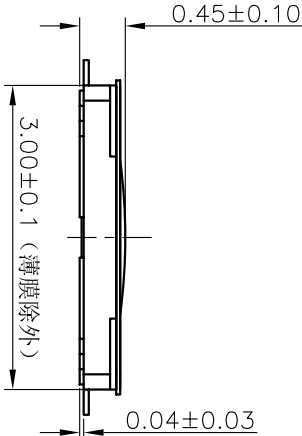
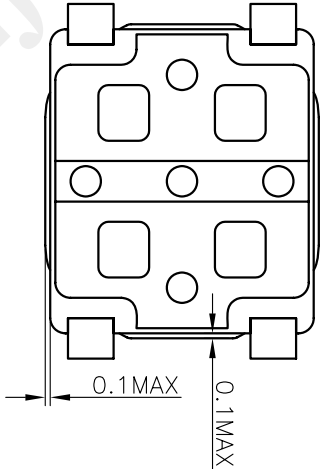



REV	ECN NO.	APPD
A	HC190039	ZO

规格 Specifications

额定负荷 Rating	DC 12V/50mA		
接触电阻Contact Resistance	500mΩ max.		
绝缘电阻Insulation resistance	DC100V 60S 100MΩ min.		
抗电强度Dielectric strength	AC250V(50~60HZ) 60S min.		
操作力Operation force	≤180±30gf	≥240±50gf	
寿命试验Operating Life	300,000 cycles		100,000 cycles
行程Travels	0.15±0.05mm		

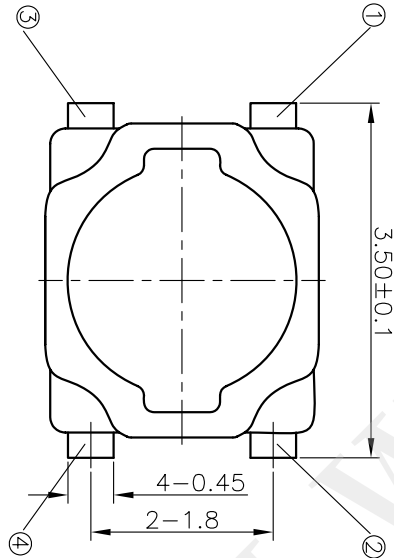

RECOMMENDED P.C.B. LAYOUT

安装尺寸图

LAND PATTERN PLAN

印刷电路板焊盘参考图

PRODUCT NO.: 1TS016B***-0450 - **

轻触开关

3X2.6系列

外形:

A=四脚

B=四脚无按柄

按点颜色:

底座颜色:

贴膜颜色:

初始颜色

则不启用

操作力:

160=160gf

180=180gf

240=240gf

手感:

0=常规(弹片)

1=大手感(弹片)

2=小手感(弹片)

3=特殊手感(弹片)

其它:

脚距:

0=常规脚距3.5mm

1=特殊脚距3.2mm

依次增加

产品高度(H):

045=0.45mm

ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
4	FILM	1	POLYAMIDE	WHITE
3	DOME	2	STAINLESS STEEL	Ag-PLATED
2	HOUSING	1	POLYAMIDE	BLACK
1	TERMINAL	1	PHOSPHOR BRONZE	Ag-PLATED
NAME(INTENDED USE)				
3X2.6 SERIES				
TACT SWITCHES				
PART NO.(INTENDED USE)				
1TS016B***-0450				
TITLE:				
PRODUCT DRAWING				
APPD:				
Z0 3/13/2019				
CHKD:				
M.H.Li 3/13/2019				
DR: Y.Y.Chen 3/13/2019				
DWG NO.:				
1TS016B				
SCALE				
25/1				
SHEET				
1/1				
REV.				
A				