
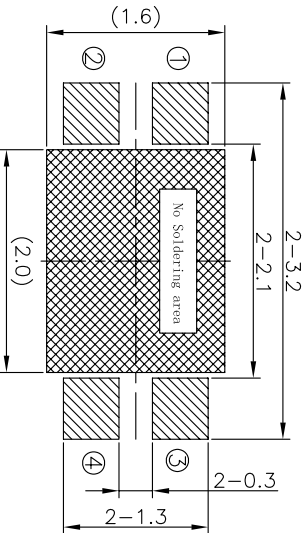
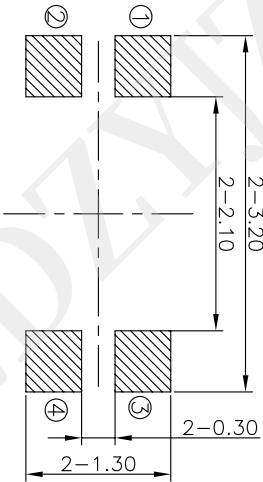

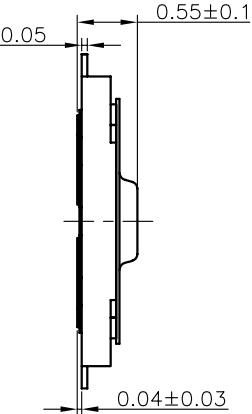
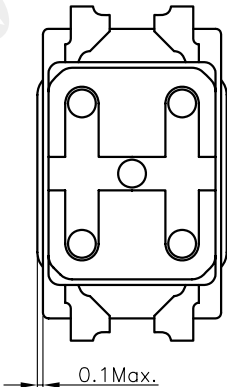



REV	ECN NO.	APPD
A	HC180073	ZO

规格 Specifications

额定负荷 Rating	DC 12V/50mA	
接触电阻Contact Resistance	500mΩ max.	
绝缘电阻Insulation resistance	DC100V 60S 100MΩ min.	
抗电强度Dielectric strength	AC250V(50-60HZ) 60S min.	
操作力Operation force	≥100±30gf	≤140±30gf
寿命试验Operating Life	200,000 cycles	
行程Travels	0.11±0.05mm	

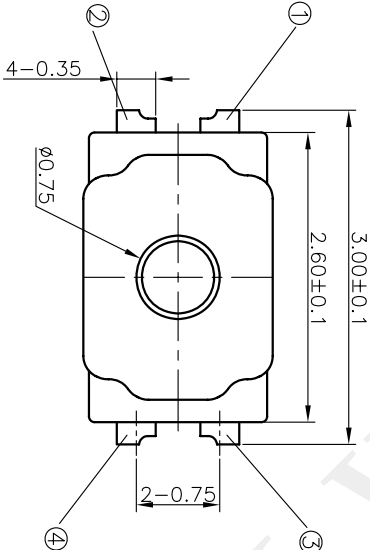

RECOMMENDED P.C.B. LAYOUT
安装尺寸图

LAND PATTERN PLAN
印刷电路板焊盘参考图

PRODUCT NO.: 1TS026A*****

轻触开关

外形: 2.6X1.6系列

A=四脚

B=四脚无按柄

触点颜色:

贴膜颜色:

操作力度:

100=100gf

160=160gf

180=180gf

225=225gf

240=240gf

手感:

0=常规(弹片)

1=大手感(弹片)

2=小手感(弹片)

3=特殊手感(弹片)

材质:

0=初始材质

1=新理材质

3=3个弹片

依次增加

产品高度(H):

050=0.50mm

035=0.35mm

060=0.60mm

其它:

CT=编带(非编带,不启用)

5	5	KNOB	1	POLYAMIDE	BLACK
4	4	FILM	1	POLYAMIDE	WHITE
3	3	DOVE	2	STAINLESS STEEL	Ag-PLATED
2	2	HOUSING	1	POLYAMIDE	BLACK
1	1	TERMINAL	1	PHOSPHOR BRONZE	Ag-PLATED
ITEM	PART NAME	QUANTITY	MATERIAL	FINISH	
X. ± 0.2	X. ± 0.1	X. ± 0.1	X. ± 0.1	X. ± 0.1	X. ± 0.1
.XX ± 0.05	.XX ± 0.05	.XX ± 0.05	.XX ± 0.05	.XX ± 0.05	.XX ± 0.05
.XXX ± 0.03	.XXX ± 0.03	.XXX ± 0.03	.XXX ± 0.03	.XXX ± 0.03	.XXX ± 0.03
NAME(INTENDED USE)	2.6X1.6 SERIES	TACT SWITCHES	HON YUAN	HON YUAN PRECISION IND. CO.,LTD.	SHENZHEN, CHINA.
PART NO.(INTENDED USE)	1TS026A*****	*****	PRODUCT DRAWING		
APPD:	ZO 6/05/2018	DWG NO.:	1TS026A		
CHKD:	M.H.Li 6/05/2018	SCALE	25/1	SHEET	1/2
DR:	W.P.Lu 6/05/2018	REV.	A		