
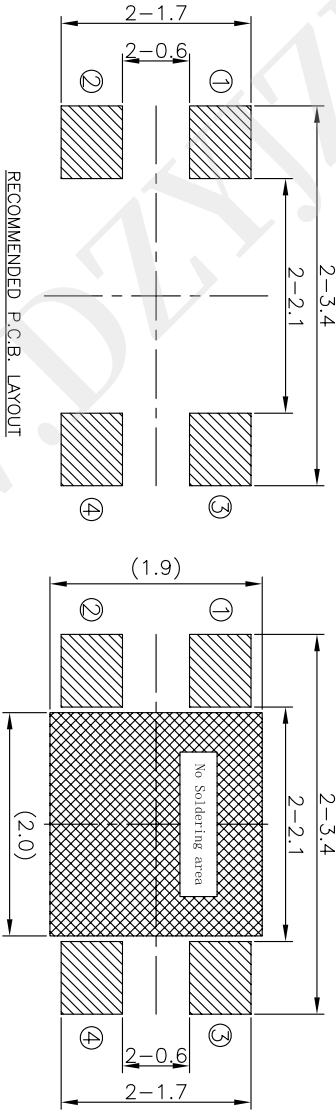
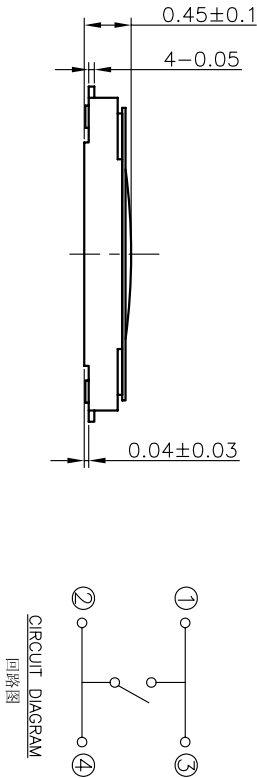


REV	ECN NO.	APPD
A	HC-19-0220	ZO

规格 Specifications

额定负荷 Rating	DC 12V/50mA
接触电阻 Contact Resistance	500mΩ max.
绝缘电阻 Insulation resistance	DC:100V 60S 100MΩ min.
抗电强度 Dielectric strength	AC250V(50-60HZ) 60S min.
操作力 Operation force	≥200±40gf
寿命试验 Operating Life	100,000 cycles
行程 Travels	0.13±0.05mm

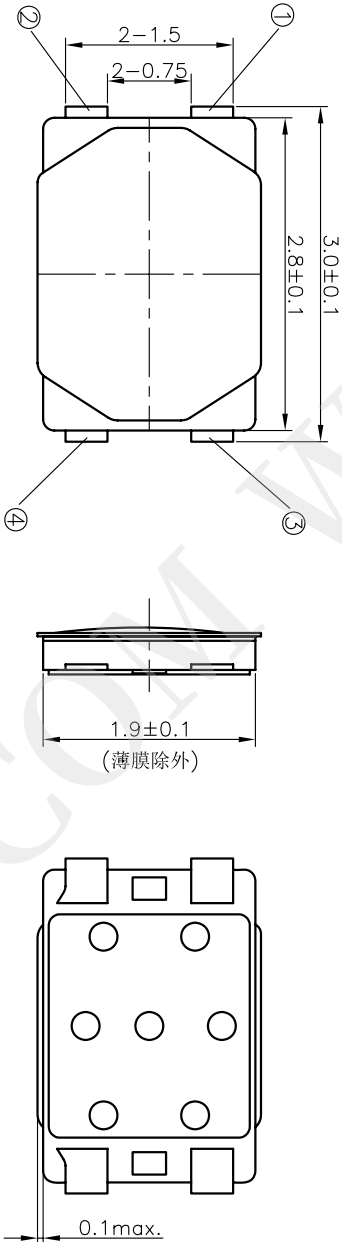

RECOMMENDED P.C.B. LAYOUT
安装尺寸图

LAND PATTERN PLAN

印刷电路板焊盘参考图

PRODUCT NO.: 1TS028B***-045**

- 轻触开关
2. 8X1.9 系列
- 外形:
- A=四脚
- B=四脚无按柄
- 触点颜色:
- 底座颜色:
- 贴膜颜色:
- 操作力度:
- 100=100gf
- 160=160gf
- 225=225gf
- 初始颜色
- 则不启用
- 手感:
- 0=常规(弹片)
- 1=大手感(弹片)
- 2=小手感(弹片)
- 3=特殊手感(弹片)
- 材质:
- 0=初始材质
- 1=新增材质
- 3=3个弹片
- 依次增加
- 其它:
- CT=编带(非编带,不启用)

4	FILM	1	POLYAMIDE	WHITE	
3	DOVE	3	SUS301	Ag-PLATED	
2	HOUSING	1	POLYAMIDE	BLACK	
1	TERMINAL	1	PHOSPHOR BRONZE	Ag-PLATED	
ITEM		PART NAME	QUANTITY	MATERIAL	
X. ± 0.2	X. ± 0.2	UNITS	MM	HON YUAN HON YUAN PRECISION IND. CO.,LTD. SHENZHEN, CHINA.	
.X ± 0.1	.X ± 0.1	MATL	NAME(INTENDED USE) 2.8X1.9 SERIES TACT SWITCHES		
.XX ± 0.01	.XX ± 0.01		PART NO.(INTENDED USE) 1TS028B***-****-****3		
.XXX ± 0.002	.XXX ± 0.005	FINISH			
		APPD: ZO 12/06/2019	DWG NO.: 1TS028B		
		QTY	CHKD: M.H.LI 12/06/2019		
			DR:Y.Y.Chen 12/06/2019		
			SCALE	SHEET	REV.
			25/1	2/2	A