


A B C D E F



N=PIN数

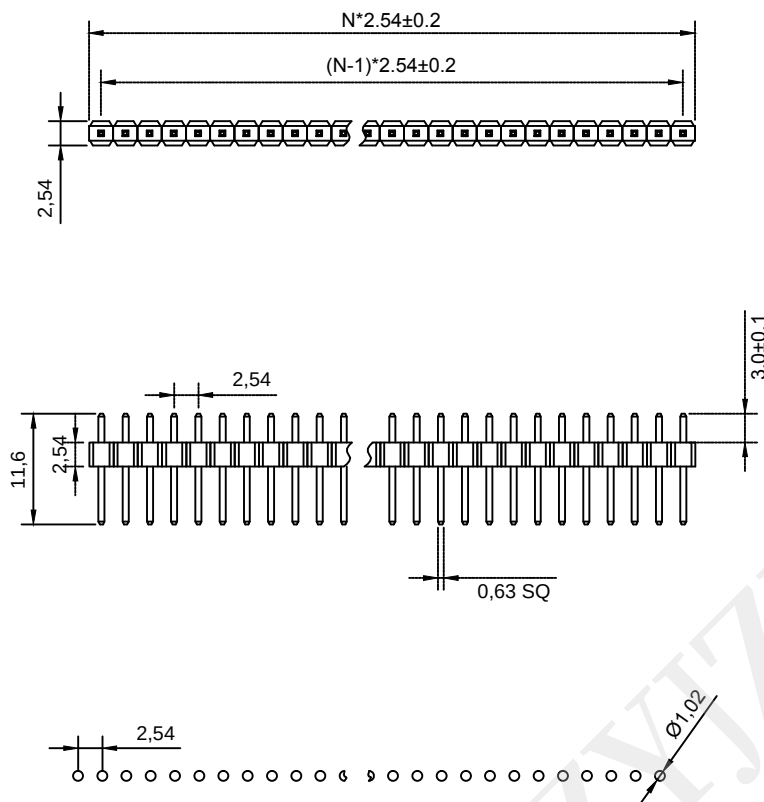

Material 材料
Insulator 塑胶: PBT PA9T (UL 94V-0)
Contact 端子: Brass 黄铜
Surface Coating 表面镀层: Gold Over Nickel 里镍外金
Electrical Characteristics 电气特性
Current rating 额定电流: 2.5Amps
Dielectric Withstanding Voltage 耐压:
AC 500V for 1 Minute.
Insulator Resistance 绝缘电阻: 1000MΩ Min.
Contact Resistance 接触电阻: 20mΩ Max.
Operating Temperature 工作温度: -40℃~+105℃
Max. Processing Temp 瞬时温度:
240° C for 30-60 seconds
(260° C for 10 seconds)

P.C.B LAYOUT

未注尺寸公差			2.54-1*N		上海洲日电子有限公司						
尺寸	公差				Shanghai Zhouri Electronics CO.,LTD						
	长度	角度			上海康司玛电子设备进出口有限公司						
	X.	±0.3									±5°
	X.X	±0.2									±3°
X.XX	±0.15		版本编号	20171018 A/0	Shanghai KangSiMa Eletronic Equipment import and export Co.,LTD						
制图	周元金	201171018	图纸编号	ZR20171018-256	TEL:86-21-34975176/51571121						
审核	张海娜	201171018	物料编号			1:1		mm	图幅	A4	
核准	章妹	201171018	第三视角		: 1 1						

A B C D E F