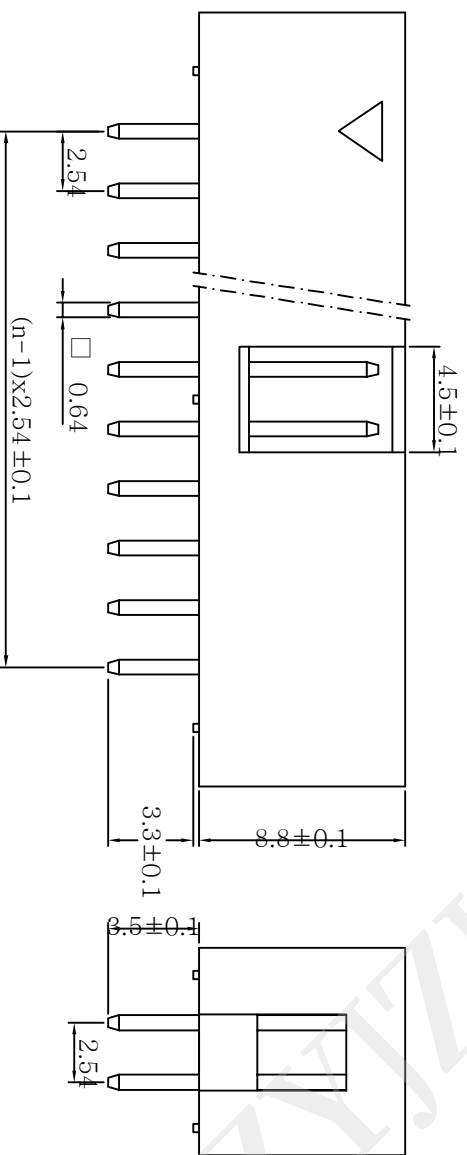
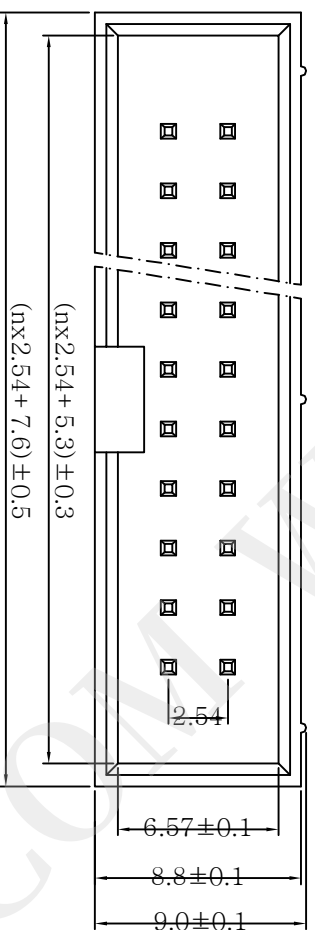


Technical data:

Housing : PBT (UL94V-0). Black

Terminal: S. 00. 64mm Brass, Gold plating

Current Rating : 1Amp Max.

Dielectric Withstanding Voltage:

600V AC R.M.S. for one minute.

Insulation Resistance : 5000M ohms Min

AT 500V DC

Contact Resistance : 30m ohms Max.

Operating Temperature : -55°C to $+105^{\circ}\text{C}$

Max Processing Temp : 220°C for 10 seconds.

3/40

简牛2.54-2xnp			
未注尺寸公差 为 ± 0.05 未注角度公差 为 $\pm 2^{\circ}$	绘制	郝世彦	
	审核		
	核准		
	供应商		
比例			
	图号	客户	
		客户料号	
	单位	mm	
	页次		