



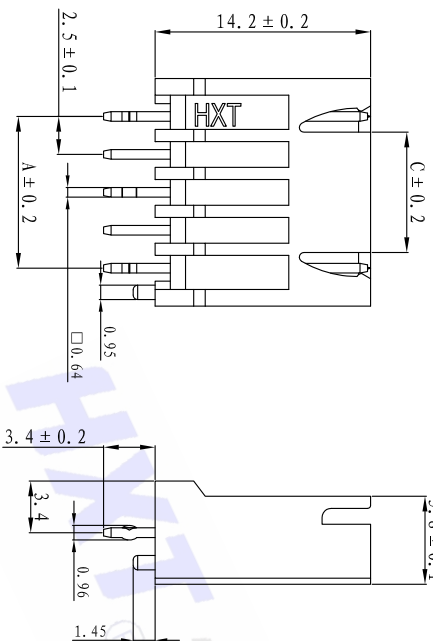


客户图


C	—	3.0	5.5	8.0	10.5	13.0	15.5	18.0	20.5	23.0	25.5	28.0	工程变更通知单号	版本	日期	说明	变更	承认
B	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	ECN NO.	REV.	DATE	DISCUSSION	CHANGE.	APPRO.
A	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	A	15'/06/05	15'/06/05	New Change	吴旭龙	吴应法
孔位	2	3	4	5	6	7	8	9	10	11	12	13	ECN-18122801	B	18'/12/28	按新编码原则, 更改产品料号	曹莉莉	陈阿国



4PIN




6PIN



NOTES:

- 1) 材料: 塑胶: 尼龙PA66+GF, UL94V-0. 颜色: 参选产品料号注释. 铜针: 黄铜、电镀: 亮锡.
- 2) 外观要求: 不能有缩水、起泡、翘曲变形、脏污. 不能有刮伤、划伤、压痕、拉料、不饱满.
- 3) 适配胶壳: 25000-**-Y-****. 铜针固定力: 25N/pin Min.
- 4) 未注公差参照图框公差表.
- 5) 产品料号: 25000-**-** AA - T * P - **

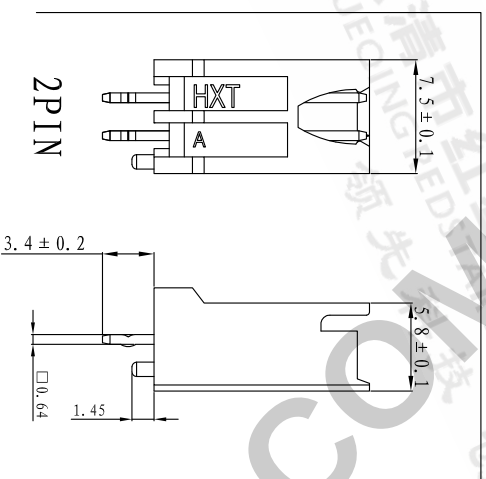

2PIN

5000-	**	AA	-	T	*	P	-	*	*
								防火等级	
						Q: V0级			
						材质			
						Q: PA66+GF			
PIN数				颜色					
02: 02Pin				1: 黑色					
.....				2: 红色					
13: 13Pin				3: 米黄					
				4: 绿色					
				5: 蓝色					
				7: 黄色					

1. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2002/95/EC FOR Rohs
2. ALL RIGHTS RESERVED, PRODUCTS ARE COVERED BY PATENSAND/OR PATENTS PENDING

X. ± 0.35	X. ° ± 5°
.X ± 0.20	.Y° ± 3°
.XX ± 0.10	.XX° ± 2°
.XXX ± 0.05, XXX° ± 1°	GENERAL TOLERANCE UNLESS OTHERWISE NOTED

MAT. L.	材质	PA66+GF
COLOR.	颜色	参照注释
DRAW.	绘图员	万 琼
DESIGN.	设计	吴旭龙
CHECK.	校阅	吴应法
APPRO.	承认	赵章财

名称		XH加高针座	
TITLE		PIN: 02 ~ 13	
料号	PART NO.	25000-**-AA-T*P-Q0	
档案名称	FILE NAME	HXC-25000-AA-C	
SCALE	1: 1	SHEET: 1 of 1	

HXT 致财电子有限公司 红鑫辰电子有限公司