





客户图

C	3.0	5.5	8.0	10.5	13.0	15.5	18.0	20.5	23.0	25.5	28.0	工程变更通知单号	版本	日期	说明	变更	承认
B	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	ECN NO.	REV.	DATE	DISCRIPTION	CHANGE.	APPRO.
A	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	A	15' /06/05	15' /06/05	New Change	吴旭龙	吴应法
孔位	2	3	4	5	6	7	8	9	10	11	12	ECN-18122801	B	18' /12/28	按新编码原则, 更改产品料号	曹莉莉	陈阿国



4PIN

6PIN

NOTES:

1) 材料:

塑胶: 尼龙PA66+GF, UL94V-0.

颜色: 参选产品料号注释.

铜针: 黄铜、电镀: 亮锡.

2) 外观要求:

不能有缩水、起泡、翘曲变形、脏污.

不能有刮伤、划伤、压痕、拉料、不饱模.

3) 适配胶壳: 25000-**-Y-****.

铜针固定力: 25N/pin Min.

4) 未注公差参照图框公差表.

5) 产品料号:

25000-**-**

AA - T * P - **

防火等级

Q: V0级

PIN数

02: 02Pin

.....

13: 13Pin

颜色

1: 黑色

2: 红色

3: 米黄


4: 绿色

5: 蓝色



7: 黄色

材质

Q: PA66+GF

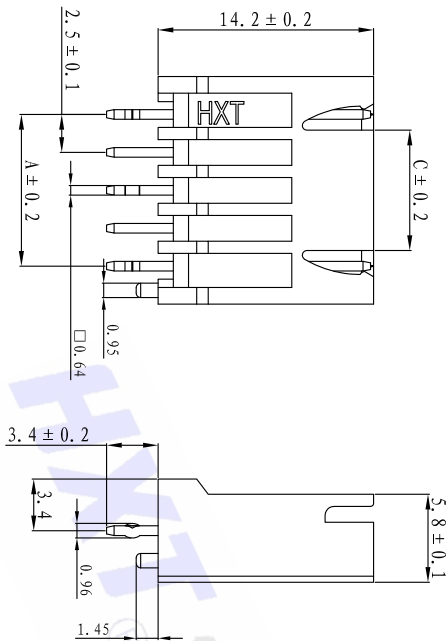

2PIN

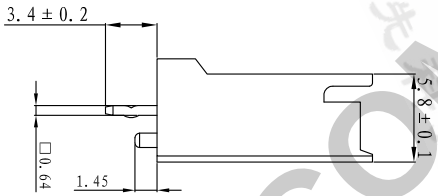

1. THIS PRODUCT DOESN'T CONTAIN

ENVIRONMENTAL HAZARDOUS

MATERIALS PER DIRECTIVE

2002/95/EC FOR Rohs

2. ALL RIGHTS RESERVED, PRODUCTS

ARE COVERED BY PATENSAND/OR

PATENTS PENDING

X. ± 0.35

X. ° ± 5°

.X ± 0.20

.X° ± 3°

.XX ± 0.10

.XX° ± 2°

.XXX ± 0.05

.XXX° ± 1°

GENERAL TOLERANCE

UNLESS OTHERWISE NOTED

HXT 致财电子有限公司

名称 XH加高针座

料号 PART NO. 25000-**-AA-T*P-Q0

料号 PART NO. 25000-**-AA-T*P-Q0

档案名称 C HXC-25000-AA-C

FILE NAME: 按公司

SCALE: 1:1

UNITS: mm

A4

SHEET: 1 of 1