

REVISION RECORD

REV	ECN	DESCRIPTION	DRAFT	DATE
-----	-----	-------------	-------	------

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 10A
2.Withstanding Voltage : AC1600V/1Min.
3.Wire Range : 26~12AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

2.Wire Range : 0.2~2.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 5.00/5.08mm,
Poles : N=02~24P/02-16P
3.Stripping length : 9~10mm
4.Operating temperature : -40℃~+105℃
5.Undimensioned Tolerances:

Pitch range in mm	Over	Over	Nominal dimension range in mm	Over	Over	Over	Over	Over	Over
6	TO	TO	30	TO	60	TO	100	TO	150
10	TO	TO	30	TO	60	TO	100	TO	150
24	TO	TO	30	TO	60	TO	100	TO	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	






6.RoHS Compliance

2EDGKDF - 5.0/5.08 - XXP - 1Y - 00A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color) :1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

NAME: 2EDGKDF-5.0/5.08-XXP-1Y-00A(H)

NINGBO DEGSON ELECTRICAL CO.,LTD
宁波高松电子有限公司

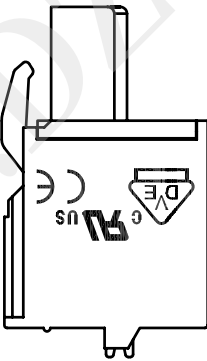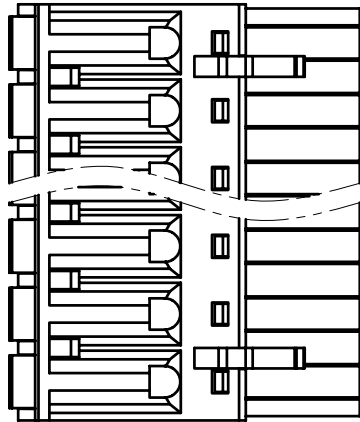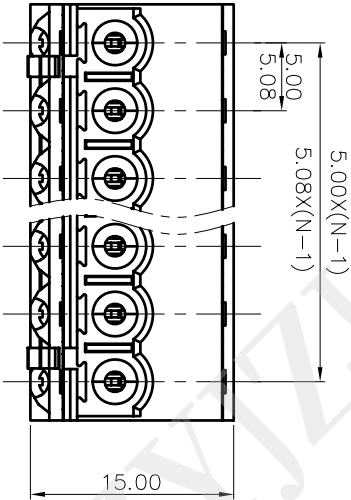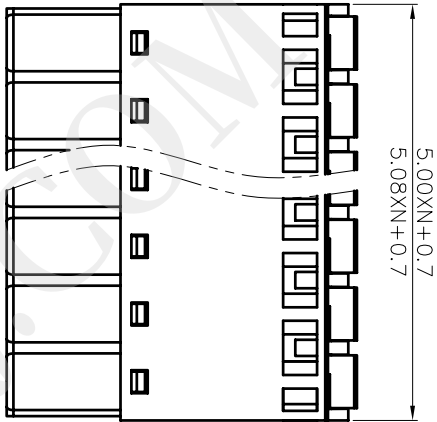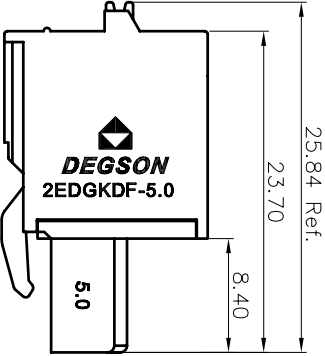

DETACHED LISTS									
PART NO.:	/	NAME:	2EDGKDF-5.0/5.08-XXP-1Y-00A(H)	REV	DO				
APPD:	/	CHKO:	/	DRAFT:	/				
			THIRD ANGLE PROJECTION						
			DO NOT SCALE DRAWING						
			SCALE						