






SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

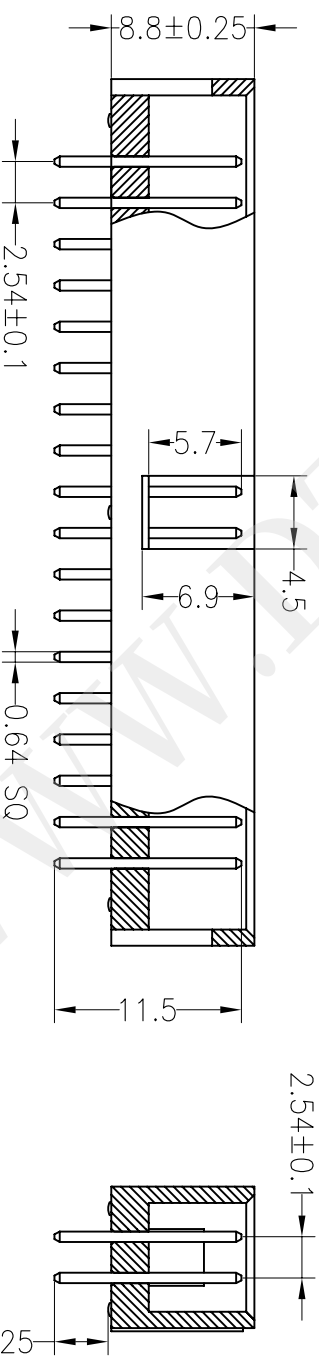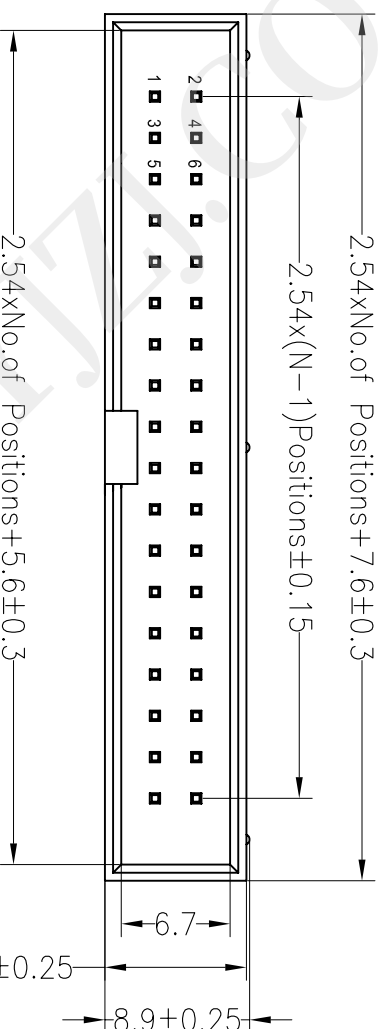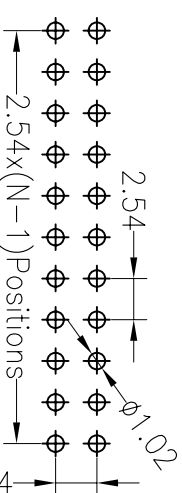

Ordering Information

3210 XX S XX X B K00 X 01

No.of Pins 6--64
Contact Plating G0:Gold Flash
Insulator Material Option
Packing T=Tube A=Troy P=Tube+Cap
G1:3U" Gold A=BK-PBT
G2:5U" Gold B=BK-PA66
G3:10U" Gold C=BK-PA6T
G4:15U" Gold D=BK-PA46
G5:30U" Gold E=BK-PA9T
F=BK-LCP
S0:Gold Flash/Tin
SN:Tin

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X		±0.30		UNIT		mm		3210XXSXXBK00X01	
X.XX		±0.20		SIZE		A4			
X.XXX		±0.10		SHEET		1/1			
Angle		±3°		PROJ.					
DIM		TOL		APPROVE					
CHANGE									
MODIFICATION DESCRIPTION									
DATE									
REV									
2015.01.28		NEW DRAWING							