

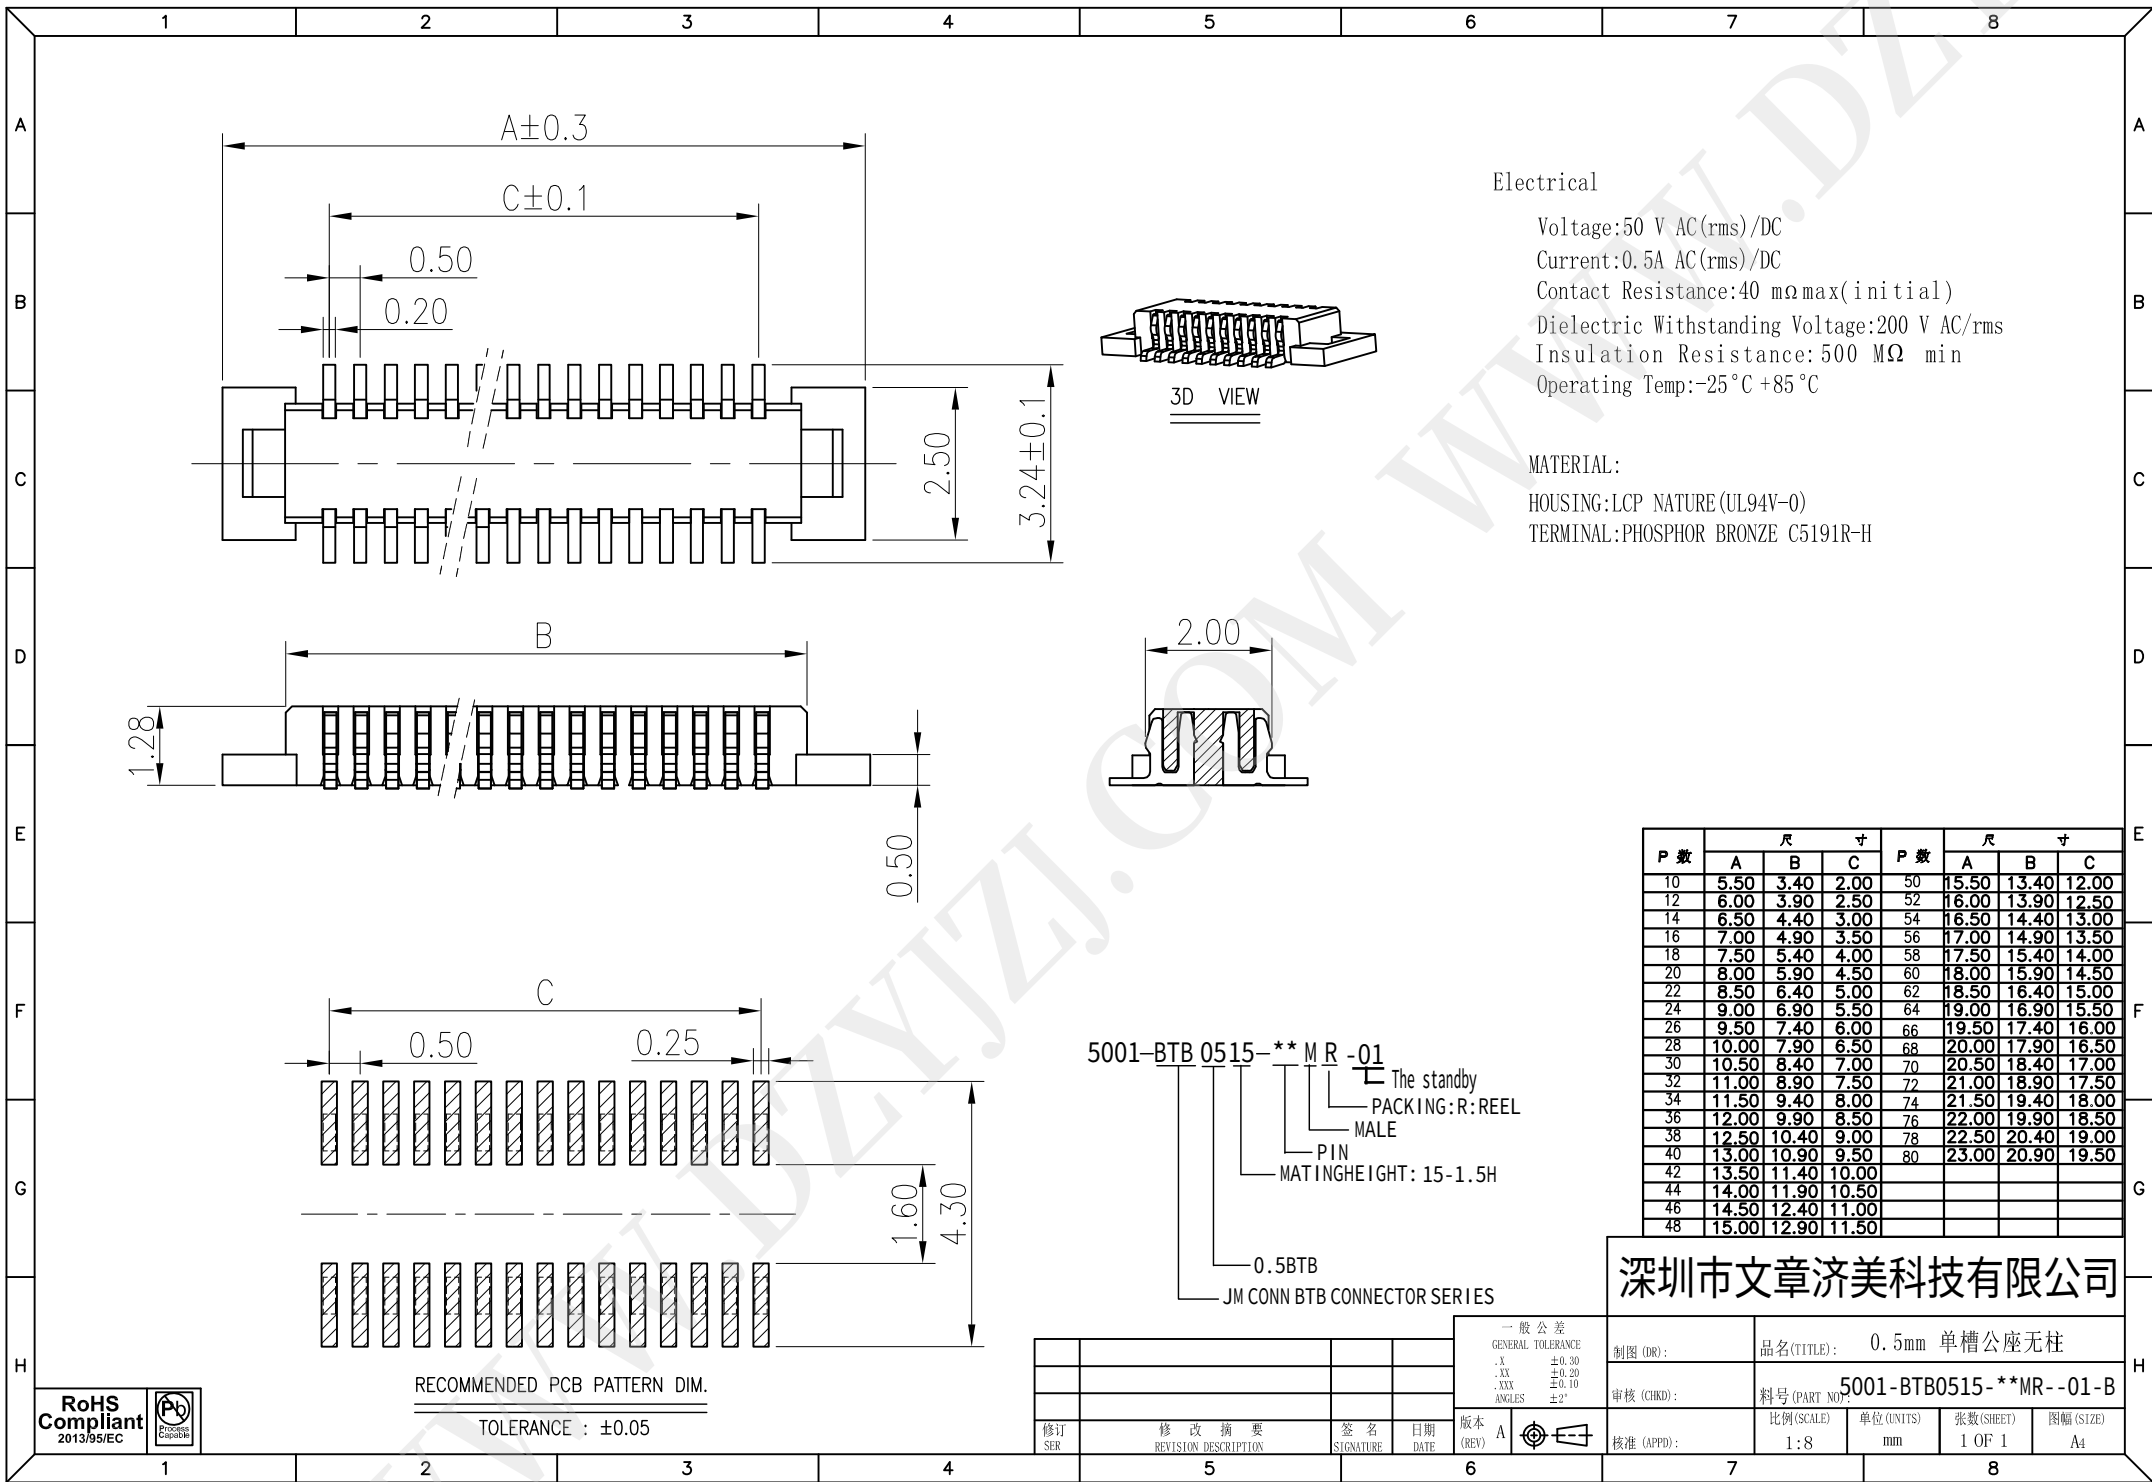
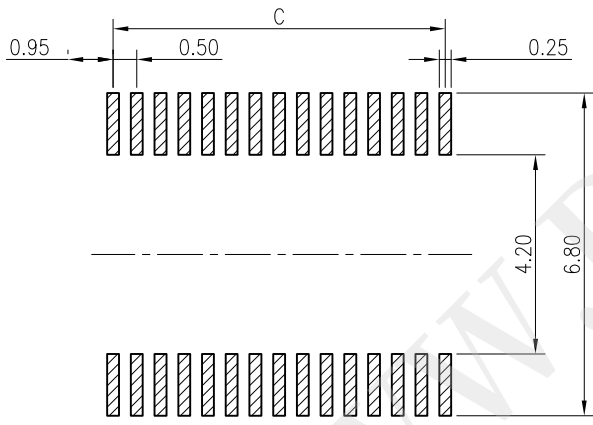
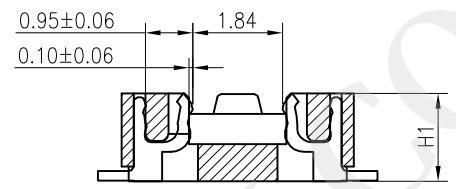




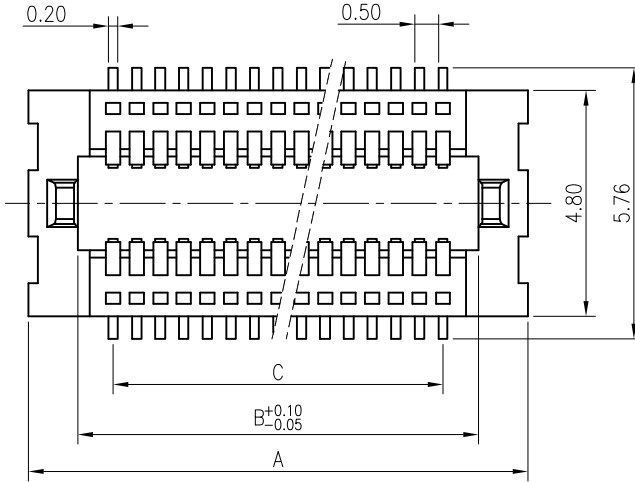

5001-BTB 0515-**-FR-01
The standby
PACKING: R: REEL
FEMALE
PIN
MATING HEIGHT: 15-1.5H;
20-2.0H;
25-2.5H.
0.5BTB
JM CONN BTB CONNECTOR SERIES

Electrical

Voltage: 50 V AC(rms)/DC
Current: 0.5A AC(rms)/DC
Contact Resistance: 60 mΩmax(initial)
Dielectric Withstanding Voltage: 200 V AC/rms
Insulation Resistance: 500 MΩ min
Operating Temp: -25°C +85°C

MATERIAL:

HOUSING: LCP NATURE (UL94V-0)
TERMINAL: PHOSPHOR BRONZE C5191R-H

H	H1
1.50	1.35
2.00	1.85
2.50	2.35

P 数	尺寸			P 数	尺寸		
	A	B	C		A	B	C
10	5.60	3.50	2.00	54	16.60	14.50	13.00
12	6.10	4.00	2.50	56	17.10	15.00	13.50
14	6.60	4.50	3.00	58	17.60	15.50	14.00
16	7.10	5.00	3.50	60	18.10	16.00	14.50
18	7.60	5.50	4.00	62	18.60	16.50	15.00
20	8.10	6.00	4.50	64	19.10	17.00	15.50
22	8.60	6.50	5.00	66	19.60	17.50	16.00
24	9.10	7.00	5.50	68	20.10	18.00	16.50
26	9.60	7.50	6.00	70	20.60	18.50	17.00
28	10.10	8.00	6.50	72	21.10	19.00	17.50
30	10.60	8.50	7.00	74	21.60	19.50	18.00
32	11.10	9.00	7.50	76	22.1	20.00	18.50
34	11.60	9.50	8.00	78	22.60	20.50	19.00
36	12.10	10.00	8.50	80	23.10	21.00	19.50
38	12.60	10.50	9.00				
40	13.10	11.00	9.50				
42	13.60	11.50	10.00				
44	14.10	12.00	10.50				
46	14.60	12.50	11.00				
48	15.10	13.00	11.50				
50	15.60	13.50	12.00				
52	16.10	14.00	12.50				

深圳市文章济美科技有限公司

RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
-----------	------------------------------	-----------------	------------

一般公差 GENERAL TOLERANCE	版本 (REV)
.X ±0.30	A
.XX ±0.20	
.XXX ±0.10	
ANGLES ±0°	

制图 (DR):	品名 (TITLE): 0.5mm 母座无柱
审核 (CHKD):	料号 (PART NO): 5001-BTB0515**-FR-01-B
核准 (APPD):	比例 (SCALE): 1:8
	单位 (UNITS): mm
	张数 (SHEET): 1 OF 1
	图幅 (SIZE): A4

