

HSF

NOTES:

Current Rating: 3.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 1000V AC/DC

Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Brass Or Phosphor Bronze

Contact plating: Au Or Sn over Ni

Insulator Material:PT+30%G.F UL94V-0

6P Without Slot "M" and "N"


8P-12P With Slot "M", Without Slot "N"

14P-64P With Slot "M" and "N"


Ordering Information

5212-XX Y B XX B X 01

Two Parts Conn+Cover	No. of Pins 06P 26P B=Brass P=phosphor	Contact Material	Color Insulator B=Black G=Grey(427C)	Bump N=W/O Bump W=W/With Bump
08P 30P				

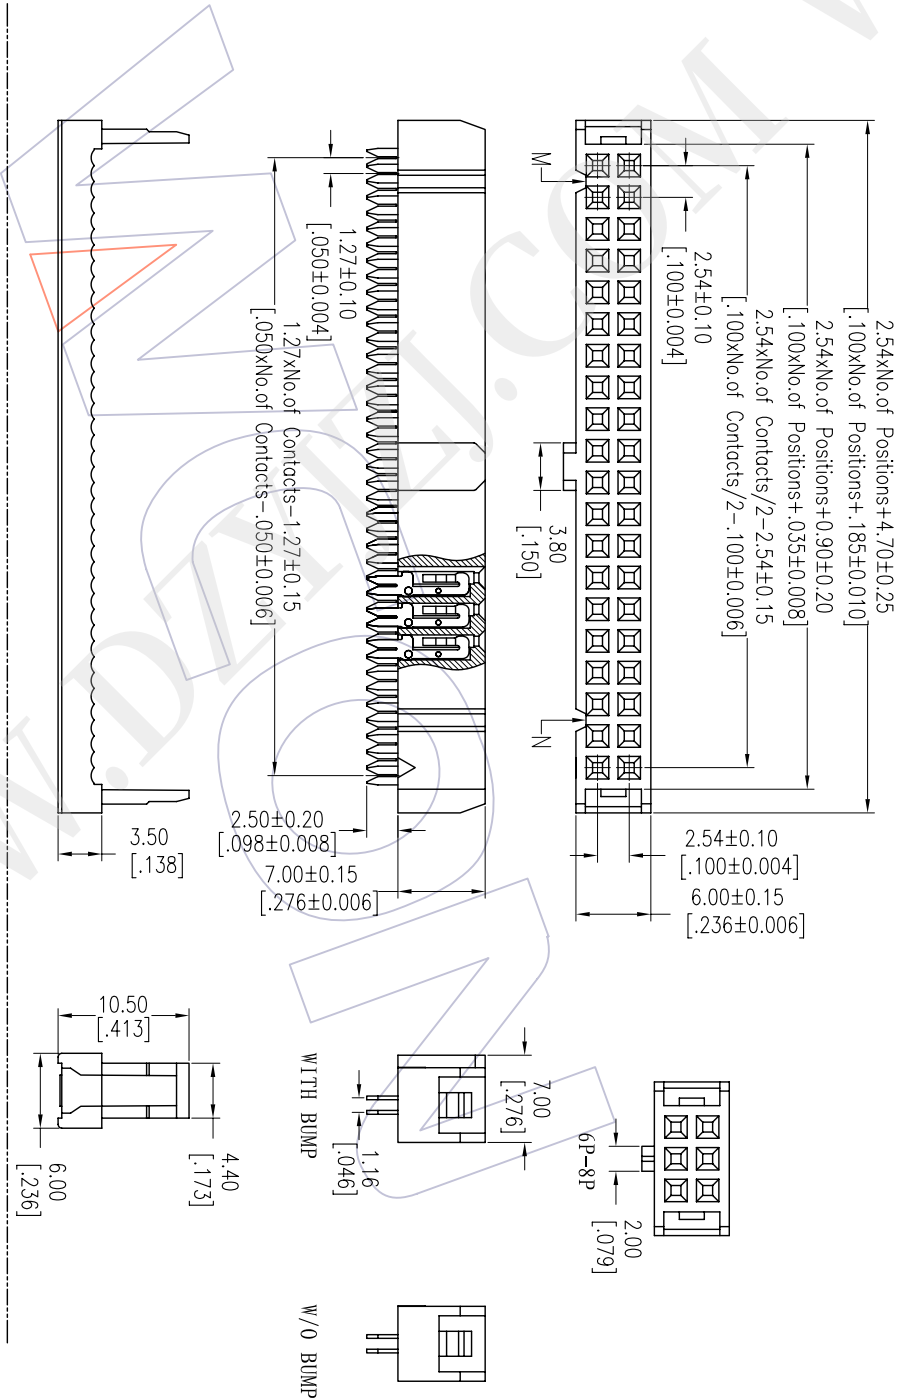

Item	Pitch	Mating
Standard	2.54	3110/3210
Alternate		

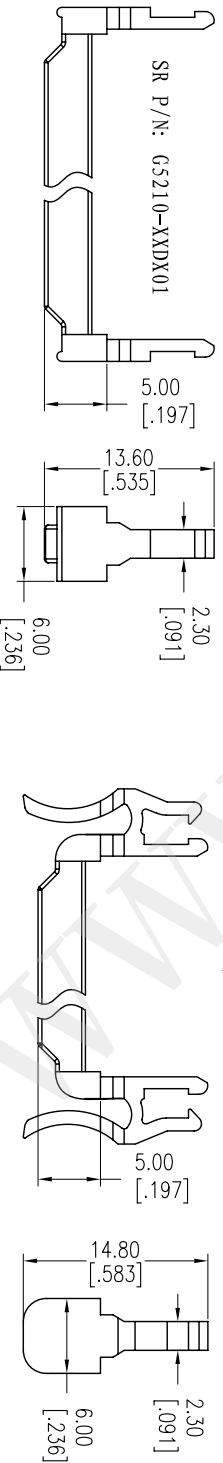[illegible]