




				 DEREN SHENZHEN DEREN ELECTRONIC CO., LTD							
DIM	TOL	DIM	TOL		CUSTOMER DRAWING		DATE	TITLE: WAFER 2.20PH 13H R/A DIP CONN			
X.	±0.35	X.	±2°		DRAW NO. ***	DESIGN:	Yy_D	2023.03.14	P/N:SEE TABLE		
.X	±0.30					CHECK:			SHEET:	1/3	
.XX	±0.25					REV.	1	APPROVAL:			SCALE: 1:1 UNIT: mm

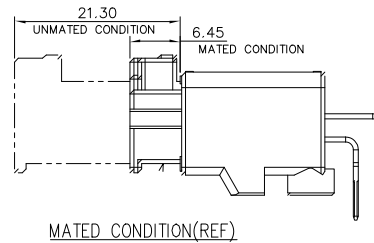


NOTES:

PRODUCT MEETS CONTROLLED SUBSTANCES SPEC. ROHS 2.0

1. MATERIAL:
 - 1.1 HOUSING: SPS, UL94V-0; COLOR: BLACK.
 - 1.2 CONTACT: BRASS.
2. FINISH:
 - 2.1 CONTACT: 100u"MIN. TIN PLATING ON SOLDER TAIL AREA.
50u". NICKEL UNDERPLATING OVERALL.
3. ELECTRICAL SPECIFICATION:
 - 3.1 VOLTAGE RATING: 50V MAX. AC/DC.
 - 3.2 CURRENT RATING: 3A MAX. AC/DC.
 - 3.3 WITHSTANDING VOLTAGE: 1000V AC/MINUTE.
 - 3.4 TEMPERATURE RANGE: -40°C~+125°C
 - 3.5 INSULATION RESISTANCE: 1000MΩ.
 - 3.6 CONTACT RESISTANCE: ≤5MΩ MAX.AFTER ENVIRONMENT TESTING:≤10MΩ

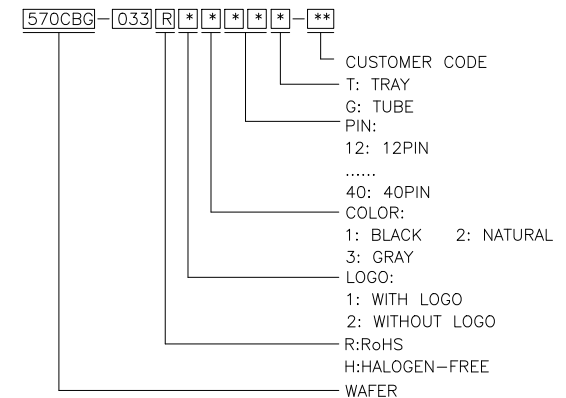



Poles	Dimensions (mm)		
	A	B	C
2*06	19.10	16.50	11.00
2*08	23.50	20.90	15.40
2*10	27.90	25.30	19.80
2*12	32.30	29.70	24.20
2*14	36.70	34.10	28.60
2*16	41.10	38.50	33.00
2*18	45.50	43.00	37.40
2*20	49.90	47.40	41.80

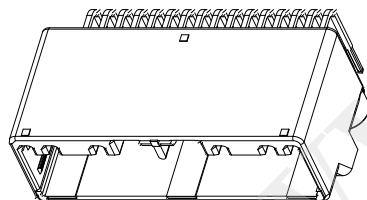


DEREN
SHENZHEN DEREN ELECTRONIC CO., LTD


CUSTOMER DRAWING		DATE	TITLE: WAFER 2.20PH 13H R/A DIP CONN			
DESIGN:	Yy_D	2023.03.14	P/N:SEE TABLE			
CHECK:			SHEET:	1/3		
APPROVAL:			SCALE:	1:1	UNIT:	mm

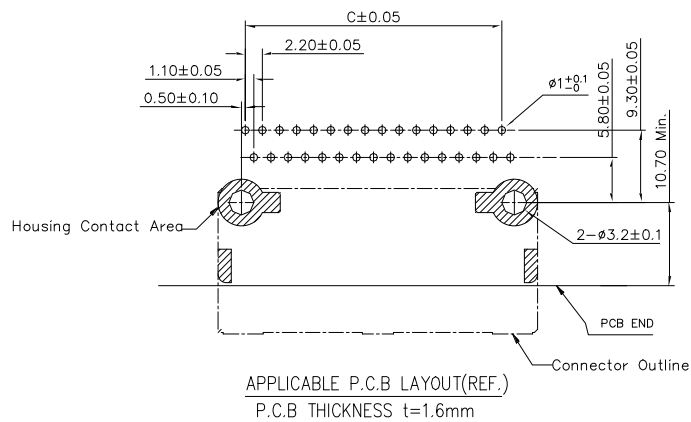


2*06PIN

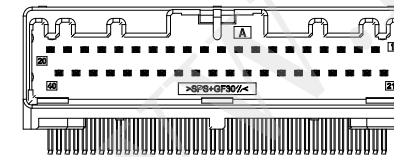


2*20PIN




2*08PIN

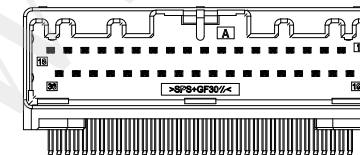


2*18PIN




2*10PIN



2*16PIN




2*12PIN

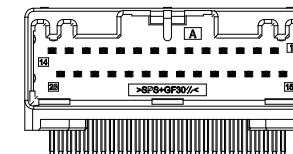

2*14PIN


DIM	TOL	DIM	TOL
X.	±0.35	X.	±2°
.X	±0.30		
.XX	±0.25		

		DEREN							
		SHENZHEN DEREN ELECTRONIC CO., LTD							
		CUSTOMER DRAWING			DATE		TITLE: WAFER 2.20PH 13H R/A DIP CONN		
		DRAW NO.		DESIGN: Yy_D	2023.03.14		P/N:SEE TABLE		
		***		CHECK:					
REV.		1	APPROVAL:			SCALE:	1:1	UNIT:	mm

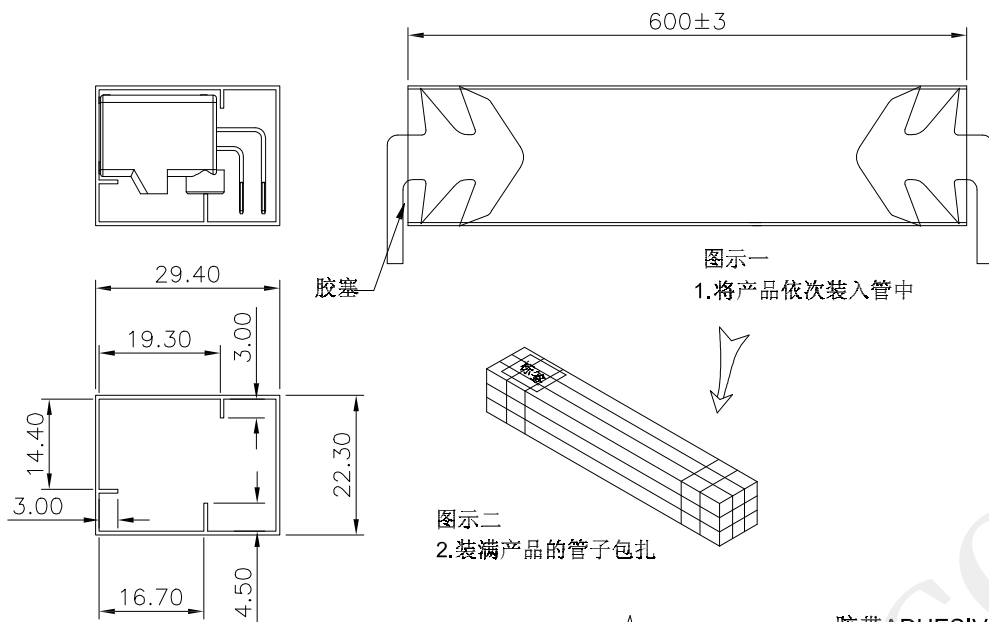

图示一
1.将产品依次装入管中

图示二
2.装满产品的管子包扎

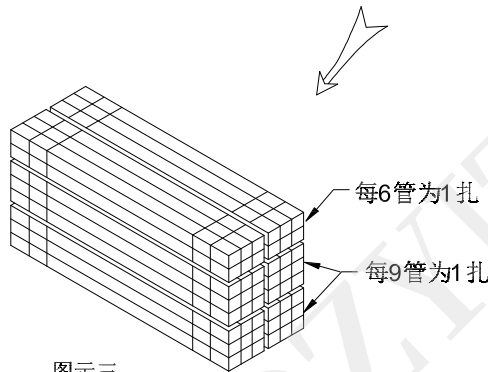

图示三
3.将每扎管子包扎

胶带ADHESIVE
TAPE

标签LABEL

图示四

4.装箱，封胶

说明:

- 1.将产品依图示方向放入真空管内，方向须一致，每个真空管放的产品数量依Pin数不同而不同，具体详见包装明细表，真空管两头用胶塞塞住，如图示一。
- 2.将装好产品的真空管平放在桌面上以3PCS为一排然后叠放3列或2列为1把如图二或图三，整理好后用PE膜将1把真空管两头PE膜缠绕包好，并在左边PE膜处贴1PCS产品标签，如图示二。
- 3.将上步完成的产品以每把进行包扎，包装成一整扎，以图示三
- 4.将包扎好产品放入纸箱内，并将纸箱用胶带封好，在其侧面右上角贴上出货标签。
- 5.纸箱规格：600*200*180mm 真空管规格：600*29.4*22.3mm
- 6.纸箱厚度：6~7mm

PIN数	每支真空产品 数量PCS/管	每箱真空管数量 PCS管/箱	每箱包装数量 PCS/箱
2*06	30	48	1440
2*08	24	48	1152
2*10	20	48	960
2*12	17	48	816
2*14	15	48	720
2*16	13	48	624
2*18	12	48	576
2*20	11	48	528

DIM	TOL	DIM	TOL
x.		x.	
.x			
.xx			

		DEREN					
		SHENZHEN DEREN ELECTRONIC CO., LTD					
		CUSTOMER DRAWING		DATE		TITLE: WAFER 2.20PH 13H R/A DIP CONN	
		DRAW NO. ***		DESIGN: Yy_D	2023.03.14	P/N:SEE TABLE	
		CHECK:			SHEET: 3/3 		
REV.	1	APPROVAL:			SCALE: N/A UNIT: mm		