


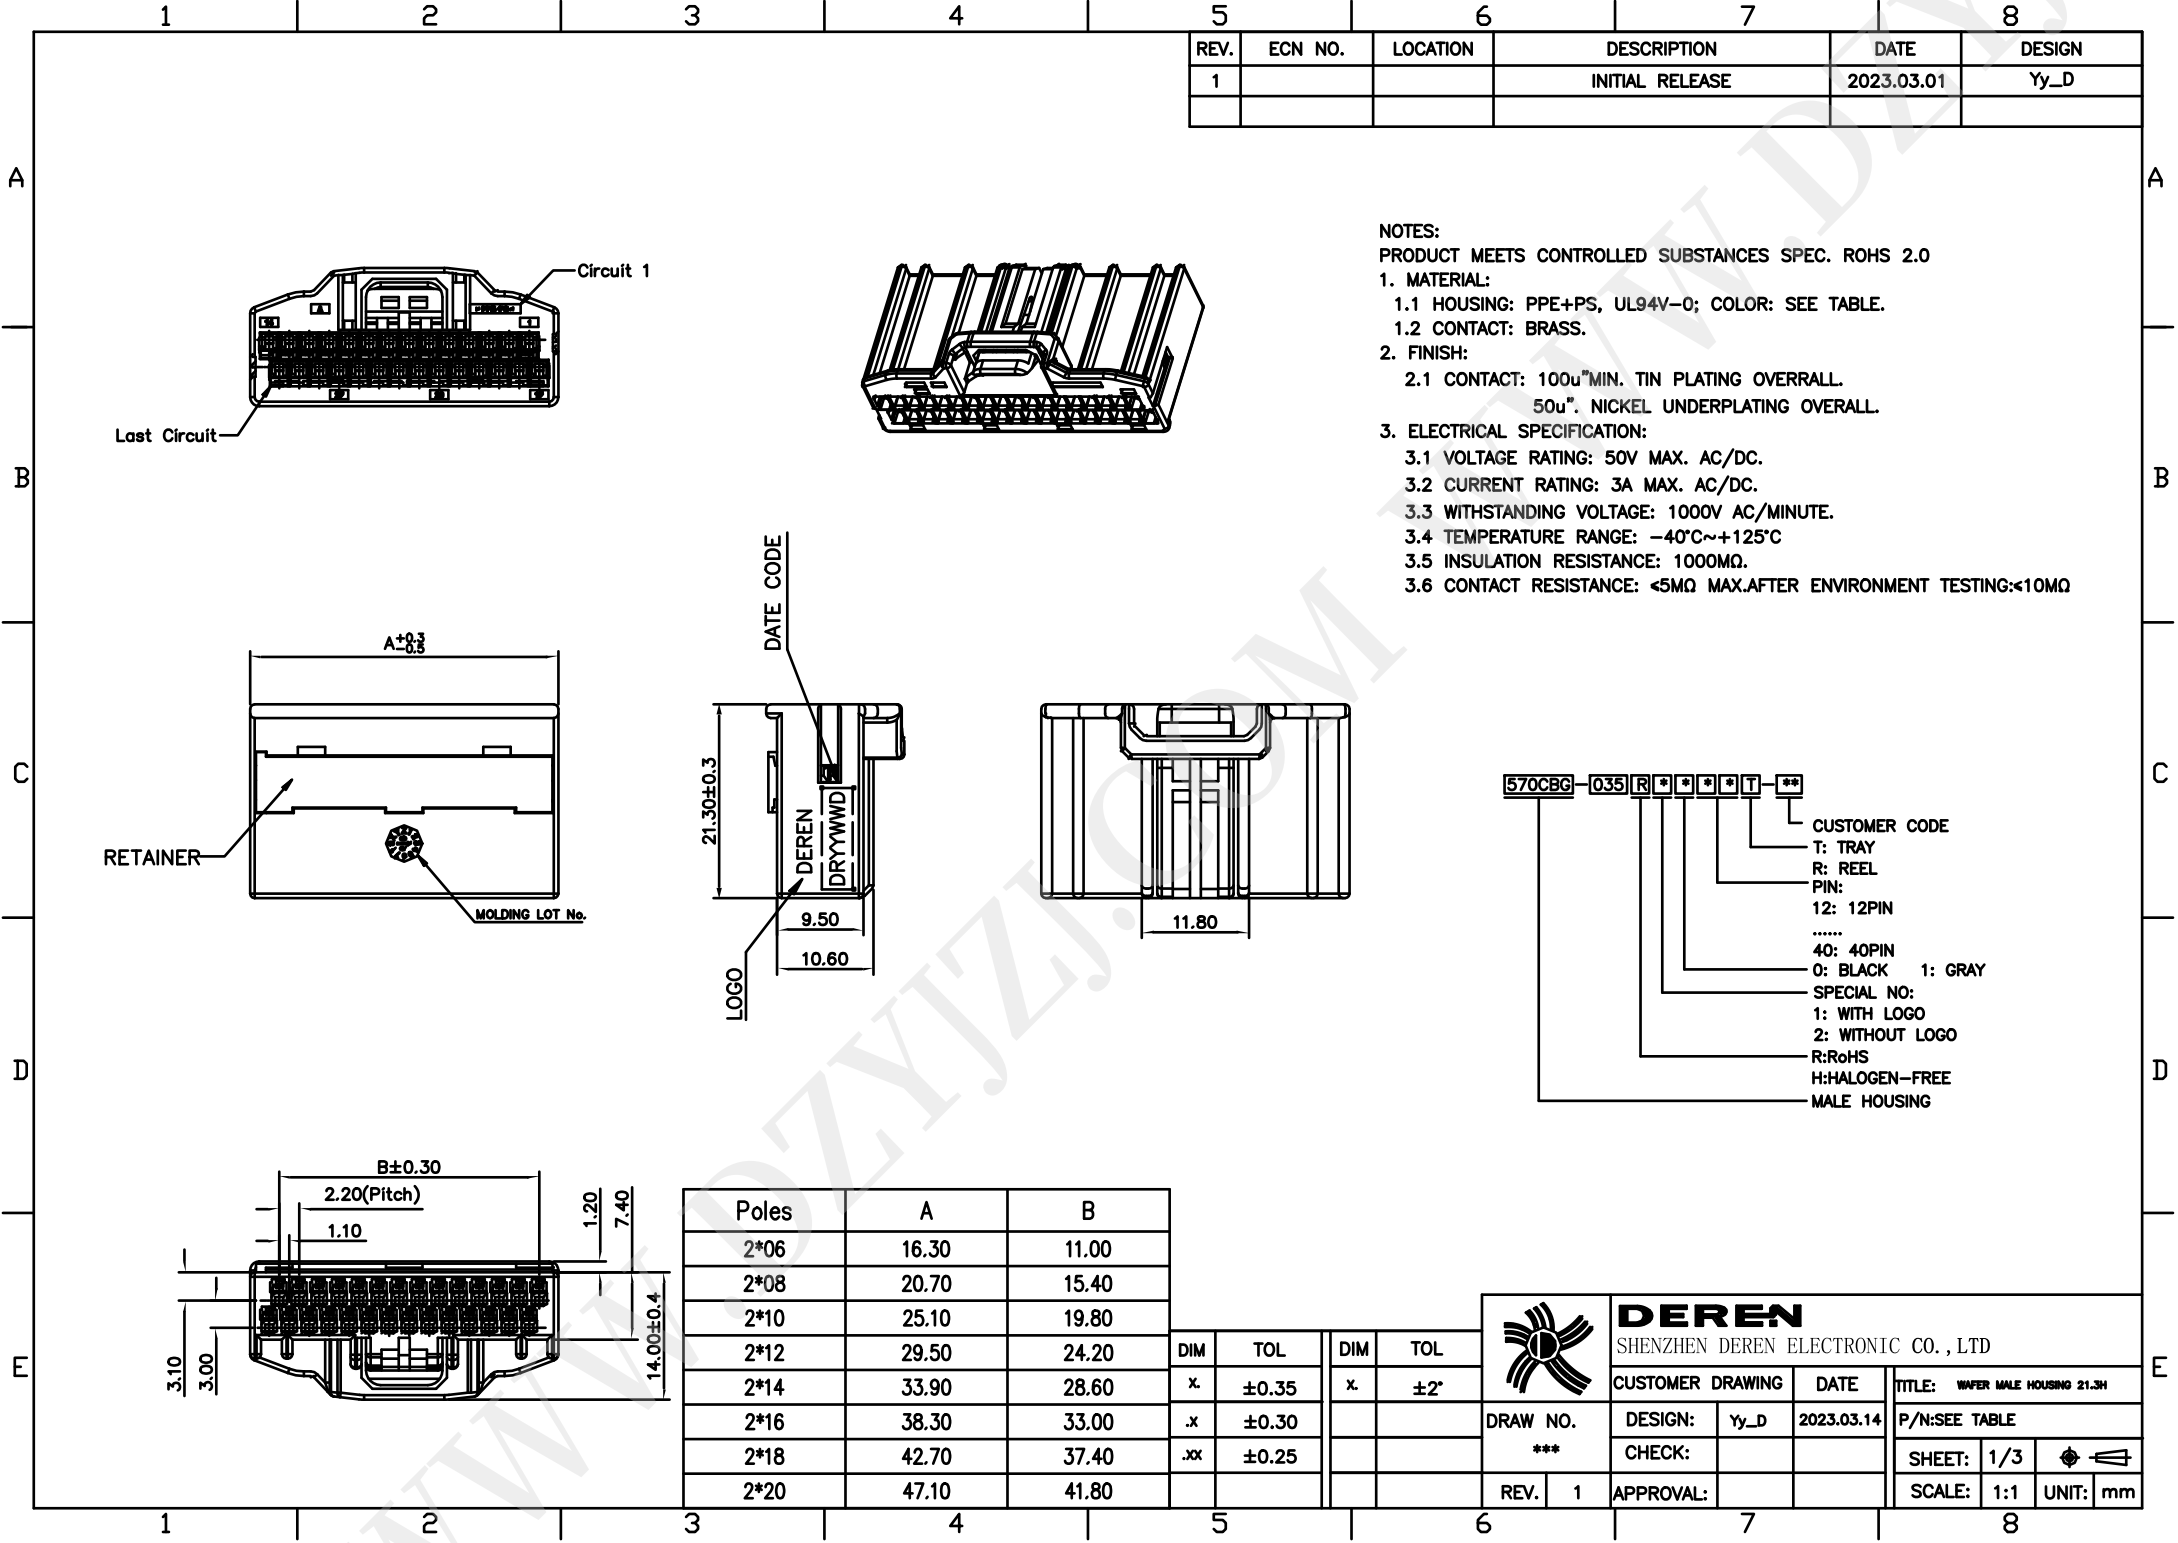

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
1			INITIAL RELEASE	2023.03.01	Yy_D

NOTES:
PRODUCT MEETS CONTROLLED SUBSTANCES SPEC. ROHS 2.0
1. MATERIAL:
1.1 HOUSING: PPE+PS, UL94V-0; COLOR: SEE TABLE.
1.2 CONTACT: BRASS.
2. FINISH:
2.1 CONTACT: 100u"MIN. TIN PLATING OVERALL.
50u". NICKEL UNDERPLATING OVERALL.
3. ELECTRICAL SPECIFICATION:
3.1 VOLTAGE RATING: 50V MAX. AC/DC.
3.2 CURRENT RATING: 3A MAX. AC/DC.
3.3 WITHSTANDING VOLTAGE: 1000V AC/MINUTE.
3.4 TEMPERATURE RANGE: -40°C~+125°C
3.5 INSULATION RESISTANCE: 1000MΩ.
3.6 CONTACT RESISTANCE: <5MΩ MAX.AFTER ENVIRONMENT TESTING:<10MΩ


570CBG-035R**T**

CUSTOMER CODE
T: TRAY
R: REEL
PIN:
12: 12PIN
40: 40PIN
0: BLACK 1: GRAY
SPECIAL NO:
1: WITH LOGO
2: WITHOUT LOGO
R:RoHS
H:HALOGEN-FREE
MALE HOUSING


Poles	A	B
2*06	16.30	11.00
2*08	20.70	15.40
2*10	25.10	19.80
2*12	29.50	24.20
2*14	33.90	28.60
2*16	38.30	33.00
2*18	42.70	37.40
2*20	47.10	41.80

DIM	TOL	DIM	TOL
x	±0.35	x	±2'
.x	±0.30		
.xx	±0.25		


		DEREN	
		SHENZHEN DEREN ELECTRONIC CO., LTD	
DRAW NO. ***	CUSTOMER DRAWING		DATE
	DESIGN:	Yy_D	2023.03.14
	CHECK:		
REV.	1	APPROVAL:	
		TITLE: WAFER MALE HOUSING 21.3H	
		P/N:SEE TABLE	
		SHEET:	1/3
		SCALE:	1:1
		UNIT:	mm




2*06PIN




2*08PIN




2*10PIN




2*12PIN

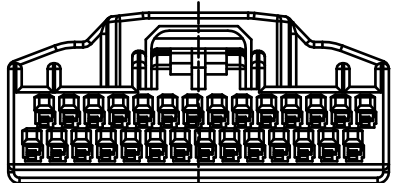


2*14PIN

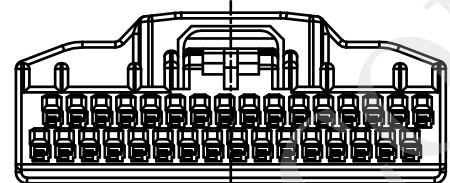

2*16PIN

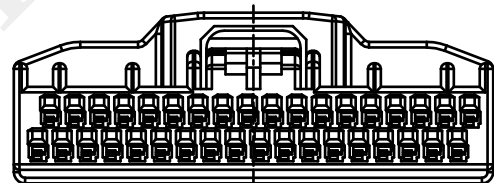

2*18PIN

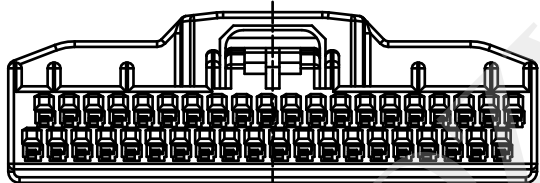

2*20PIN

DIM	TOL	DIM	TOL
x	±0.35	x	±2°
.x	±0.30		
.xx	±0.25		

	DEREN			
	SHENZHEN DEREN ELECTRONIC CO., LTD			
	CUSTOMER DRAWING		DATE	TITLE: WAFER MALE HOUSING 21.3H
	DRAW NO.		DESIGN: yy_D	P/N:SEE TABLE
***		CHECK:		SHEET: 2/3
REV. 1		APPROVAL:		SCALE: 1:1 UNIT: mm

A

B

C

D

E



A

B


C

D

E

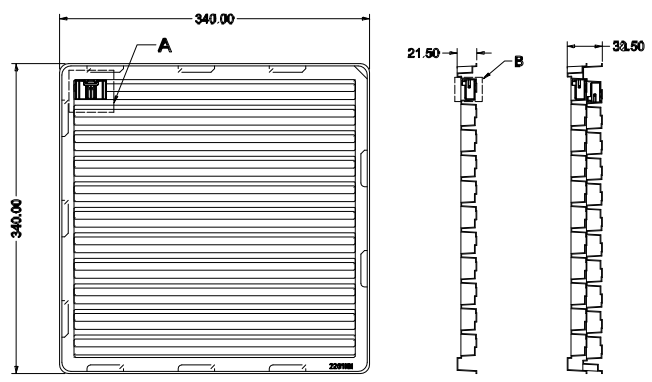

局部放大图A
比例3:1





局部放大图B
比例5:1

Pin位	盘/Pcs	箱/盘	箱/Pcs
2*06	198	12	2376
2*08	154	12	1848
2*10	132	12	1584
2*12	110	12	1320
2*14	99	12	1188
2*16	88	12	1056
2*18	77	12	924
2*20	66	12	792

步骤:1

步骤:2

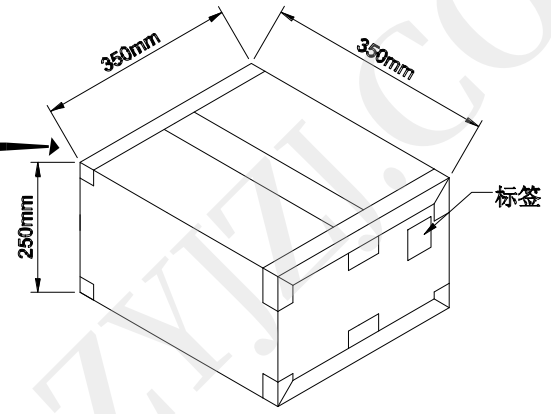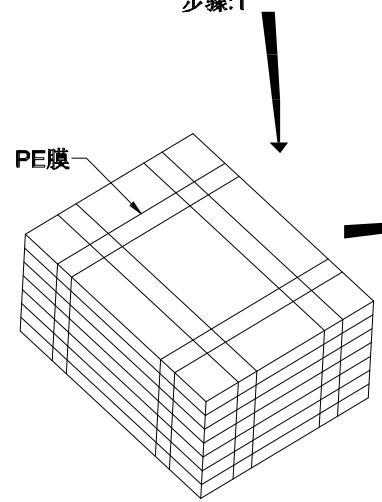

包装说明:
步骤1: 将检验好的良品整齐摆放入吸塑盘。
吸塑盘规格: 340*340*20.7mm
吸塑盘材质: 透明PET;
步骤2: 在重叠吸塑盘时, 上下层吸塑盘方向需错开摆放, 12盘叠起来为1扎, 最顶层再放1PCS空吸塑盘当上盖用, 然后用PE膜扎住。
步骤3: 一纸箱里放1扎, 共12盘, 然后用透明胶带封箱, 贴上外箱标签。
纸箱规格: 350*350*250mm
纸箱材质: K=K; 纸箱厚度: 6~7mm

DIM	TOL	DIM	TOL
x.		x.	
.x			
.xx			

		DEREN			
		SHENZHEN DEREN ELECTRONIC CO., LTD			
DRAW NO. ***		CUSTOMER DRAWING	DATE	TITLE: WAFER MALE HOUSING 21.3H	
		DESIGN: Yy_D	2023.03.14	P/N:SEE TABLE	
		CHECK:		SHEET: 3/3	
REV.	1	APPROVAL:		SCALE: N/A	UNIT: mm