SAMZO | REAC/ROHS

REV	ECN NO	DESRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2013.06.21

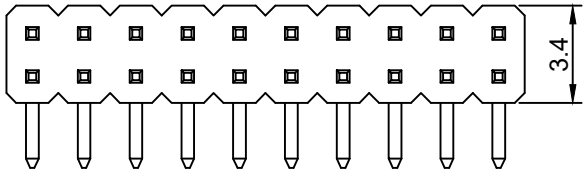



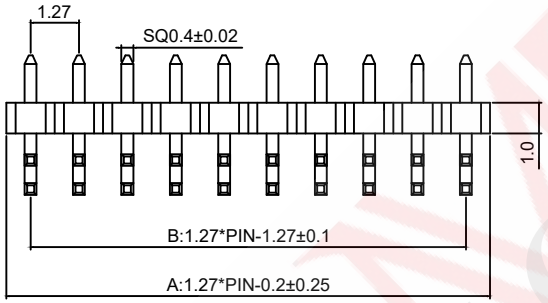

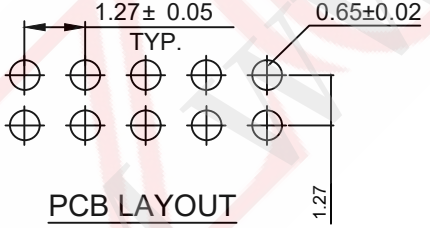

PCB LAYOUT

Options	PA	PB	PC	H
Standard	2.0	3.8	2.0	1.5
Specified				

No. of Contacts	DIMENSIONS A	DIMENSIONS B	No. of Contacts	DIMENSIONS A	DIMENSIONS B
1	0	1.27	26	31.75	33.02
2	1.27	2.54	27	33.02	34.29
3	2.54	3.81	28	34.29	35.56
4	3.81	5.08	29	35.56	36.83
5	5.08	6.35	30	36.83	38.10
6	6.35	7.62	31	38.10	39.37
7	7.62	8.89	32	39.37	40.64
8	8.89	10.16	33	40.64	41.91
9	10.16	11.43	34	41.91	43.18
10	11.43	12.70	35	43.18	44.45
11	12.70	13.97	36	44.45	45.72
12	13.97	15.24	37	45.72	46.99
13	15.24	16.51	38	46.99	48.26
14	16.51	17.78	39	48.26	49.53
15	17.78	19.05	40	49.53	50.80
16	19.05	20.32	41	50.80	52.07
17	20.32	21.59	42	52.07	53.34
18	21.59	22.86	43	53.34	54.61
19	22.86	24.13	44	54.61	55.88
20	24.13	25.40	45	55.88	57.15
21	25.40	26.67	46	57.15	58.42
22	26.67	27.94	47	58.42	59.69
23	27.94	29.21	48	59.69	60.96
24	29.21	30.48	49	60.96	62.23
25	30.48	31.75	50	62.23	63.50

A.名称：5A-排针
B.间距：I-1.27mm
C.方式：W-90° DIP
D.塑高(H)：2-1.5mm
E:总长(L)：35-4.3mm
F:上针长(PA)：20-2.0mm
G:针数：202-2*2P(2-50PIN)
H:定位：W-无定位
I:物料编码：5-厚金定制

5A A I B W C 2 D - 35 E 20 F - 2** G - W H 5 I

SPECIFICATIONS
Current Rating: 1Amps
Insulator resistance: 500 Megohms min.
Dielectric Withstaanding: AC 500V
Operating Temperature: -40 TO +105°C
Insulator Material: NY-6T
Contact Materiaal: Brass
Plating: Gold flash

UNSPECIFIED TOLERANCE：±0.20

ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR
1	针	黄铜	N	镀金
2	主体	NY-6T	1	黑色

DESIGN	WANGGUIFA	2018.06.12	
CHECKED	ZHENGUILAN	2018.06.12	
APPROVED	LILIANJIANG	2018.06.14	

GENERAL TOLERANCE	
⩾0~2<	±0.15
⩾2~5<	±0.25
⩾0~2<	±0.15
⩾5	±0.35

FIRST VIEW

SCALE 1:1 UNIT mm

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

SAMZO COMPONENTS
Electronic switch and connector manufacturer

TITLE:: PIN HEADER
PITCH 1.27mm 90° 双弯
DWG NO：5AIW2-P12760
PART NO：5AI22210655210
MODEL NO：5AIW2-3520-2NP-W5
NAME：PIN-H CONNECTOR