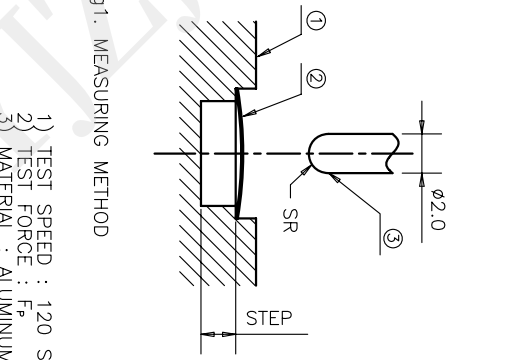



NOTES:
1. ALL THE OPERATING PERFORMANCE SPEC. IN BELOW TABLE SHOULD BE MET. THE MEASURE METHOD IS SHOWN AS Fig.1 OPERATE THE DOME 10 TIMES BEFORE MEASURING.

REV	ECN NO.	APPD
A	HC060009	ZO
B	HC060033	ZO
C	HC100168	ZO
D	HC110001	ZO
E	HC140005	ZO
F	HC160002	ZO

PART NAME	D	H	P.F(gf)	C/R(%)
600-5***-***	$\phi 5 \pm 0.05$	0.25 $\pm$ 0.05	CP $\pm$ 15	C/R $\pm$ 10
600-C***-***	$\phi 4.5 \pm 0.05$	0.22 $\pm$ 0.05	CP $\pm$ 15	C/R $\pm$ 10
600-4***-***	$\phi 4 \pm 0.05$	0.2 $\pm$ 0.05	CP $\pm$ 15	C/R $\pm$ 10
600-B***-***	$\phi 3.5 \pm 0.05$	0.18 $\pm$ 0.05	CP $\pm$ 15	C/R $\pm$ 10
600-3***-***	$\phi 3 \pm 0.05$	0.16 $\pm$ 0.05	CP $\pm$ 15	C/R $\pm$ 10
600-L***-***	$\phi 2.92 \pm 0.03$	0.15 $\pm$ 0.05	CP $\pm$ 15	C/R $\pm$ 10
600-J***-***	$\phi 2.9 \pm 0.05$	0.15 $\pm$ 0.05	CP $\pm$ 15	C/R $\pm$ 10
600-K***-***	$\phi 2.85 \pm 0.03$	0.15 $\pm$ 0.05	CP $\pm$ 15	C/R $\pm$ 10
600-A***-***	$\phi 2.5 \pm 0.05$	0.15 $\pm$ 0.05	CP $\pm$ 15	C/R $\pm$ 10
600-D***-***	$\phi 2.2 \pm 0.05$	0.15 $\pm$ 0.05	CP $\pm$ 15	C/R $\pm$ 10
600-2***-***	$\phi 2.0 \pm 0.05$	0.15 $\pm$ 0.05	CP $\pm$ 15	C/R $\pm$ 10

X. ± 0.2		X. ± 3'	UNITS MM	NAME(INTENDED USE) METAL DOME FOR TACT SWITCH	HON YUAN HON YUAN PRECISION IND. CO.,LTD. SHENZHEN, CHINA, R.O.C.
.X ± 0.1		.X' ± 2'			
.XX ± 0.05		.XX' ± 1'	FINISH	PART NO.(INTENDED USE) 600-----***	TITLE: DOME CUSTOMER DRAWING
.XXX ± 0.03		.XXX' ± 0.5'			
THESE DIMENSIONS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF HON YUAN PRECISION IND. CO., LTD.					
Q'TY			APPD: ZO 3/18/2014	CHKD: M.H.LJ/3/18/2014	
DR: WP.LU 3/18/2014					
DWG NO.: 600-0000-000					
SCALE		SHEET	REV.		
1/1		1/5	F		