


# CONNECTORS FOR AUTOMOBILES

汽车用接插件

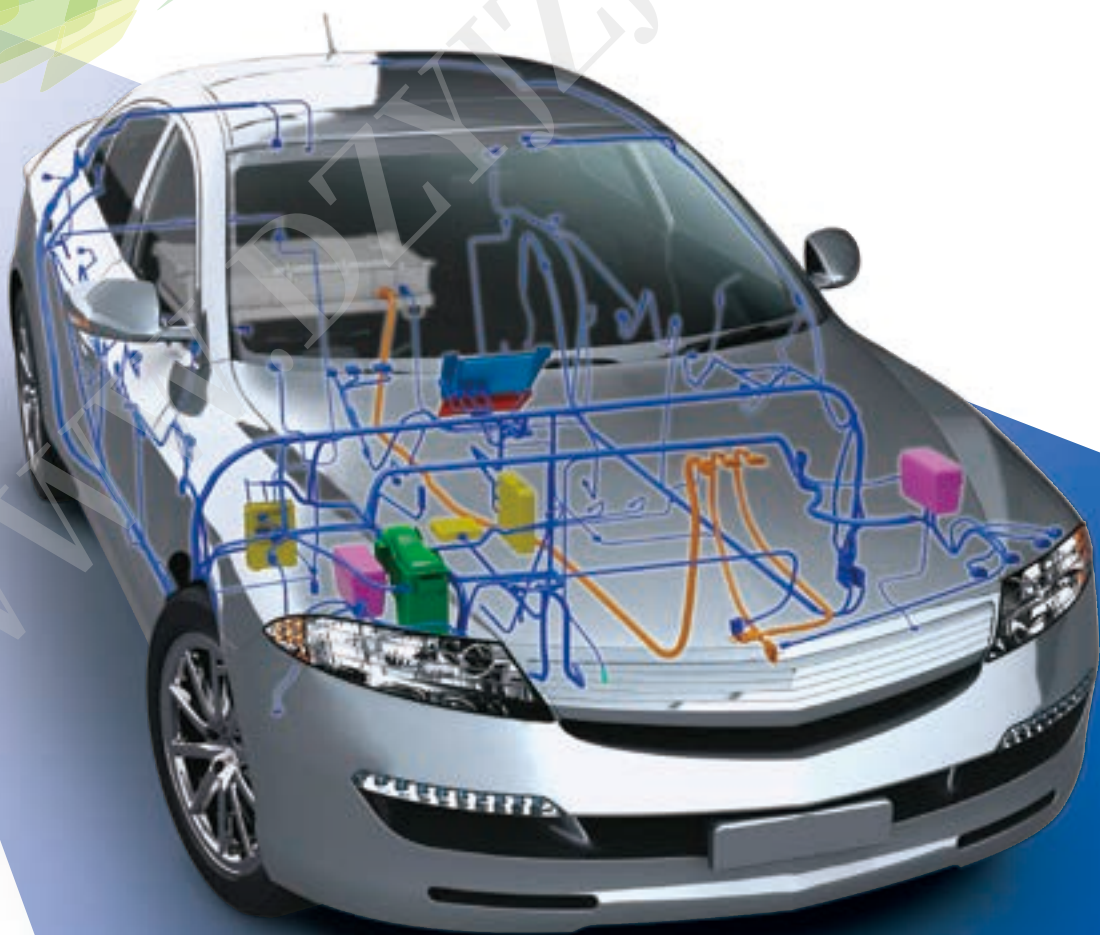

CONTENTS

| unsealed / sealed<br>非防水 / 防水 | Connector Series<br>接插件系列 | Terminal Tab Size<br>端子大小 | No. of Way Variation<br>极数种类                   | Applicable Cable Size<br>适用电线大小 | Page<br>刊登页 | Contact Resistance<br>接触电阻（包括压接部）                       | Leak Current<br>漏电流 | Insulation Resistance<br>绝缘电阻 | Seal<br>密封性 | Material<br>材质                                                                  |                                                                           |
|-------------------------------|---------------------------|---------------------------|------------------------------------------------|---------------------------------|-------------|---------------------------------------------------------|---------------------|-------------------------------|-------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| unsealed                      | TS                        | 0.64 (025)                | 2, 5, 10, 14, 16, 19, ,22, 24, 28, 32, 36, ,40 | 0.13 - 0.5                      | A-02        | 8mΩ max.(initial)<br>16mΩ max.(after durability tests)  | 3mA max.            | 100MΩ min.                    | —           | 接插件护套端子<br>Housing / PBT<br>Terminal / Brass, Heat-Resistant Copper Alloy       |                                                                           |
|                               |                           | 1.5 (060)                 | 2, 4, 8, 12                                    | 0.13 - 2.0                      | A-07        | 3mΩ max.(initial)<br>10mΩ max.(after durability tests)  |                     |                               |             | 接插件护套端子<br>Housing / PBT, PA6T<br>Terminal / Brass, Heat-Resistant Copper Alloy |                                                                           |
|                               |                           | 2.3 (090)                 | 2, 6, 8, 9, 10, 11, 12, 13, 16, 20             | 0.22 - 2.0                      | A-10        |                                                         |                     |                               |             |                                                                                 |                                                                           |
|                               |                           | 4.8 (187)                 | 1, 2, 3, 4, 6, 8, 10                           | 0.3 - 3.0                       | A-14        |                                                         |                     |                               |             |                                                                                 |                                                                           |
|                               |                           | 8.0 (312)                 | 1, 2, 3, 4                                     | 0.5 - 8.0                       | A-18        |                                                         |                     |                               |             |                                                                                 |                                                                           |
|                               |                           | Hybrid                    | 0.64+1.5                                       | 12, 18, 20                      | —           | A-20                                                    |                     |                               |             | 8mΩ max.(initial)<br>16mΩ max.(after durability tests)                          | 接插件护套端子<br>Housing / PBT<br>Terminal / Brass, Heat-Resistant Copper Alloy |
|                               |                           |                           | 0.64+2.3                                       | 17, 18, 20                      | —           | A-21                                                    |                     |                               |             |                                                                                 |                                                                           |
|                               |                           |                           | 0.64+4.8                                       | 20                              | —           | A-22                                                    |                     |                               |             |                                                                                 |                                                                           |
|                               |                           |                           | 2.3+4.8                                        | 14, 15, 20                      | —           | A-22                                                    |                     |                               |             |                                                                                 |                                                                           |
|                               |                           | PCB                       | 0.64                                           | 16, 33, 36, 56, 60, 68          | —           | A-24                                                    |                     |                               |             | 8mΩ max.(initial)<br>16mΩ max.(after durability tests)                          | 接插件护套端子<br>Housing / PBT, SPS<br>Terminal / Brass                         |
|                               |                           |                           | 0.64+1.5                                       | 20                              | —           | A-26                                                    |                     |                               |             | 8mΩ max.(initial)<br>16mΩ max.(after durability tests)                          | 接插件护套端子<br>Housing / LCP<br>Terminal / Brass                              |
|                               | HE                        | 0.64 (025)                | 2, 3, 4, 6, 7, 10, 12, 16, 20, 24, 34          | 0.22 - 0.75                     | C-02        | 5mΩ max.(initial)<br>10mΩ max.(after durability tests)  | 1mA max.            | 100MΩ min.                    | —           | 接插件护套端子<br>Housing / PBT<br>Terminal / Brass, Heat-Resistant Copper Alloy       |                                                                           |
|                               |                           | 1.0 (040)                 | 2, 5, 6, 8, 13, 17, 21                         | 0.22 - 0.85                     | C-06        | 3mΩ max.(initial)<br>6mΩ max.(after durability tests)   |                     |                               |             |                                                                                 |                                                                           |
|                               |                           | 2.3 (090)                 | 2, 3, 4, 5, 6, 8, 10, 14, 16, 20               | 0.3 - 2.0                       | C-09        |                                                         |                     |                               |             |                                                                                 |                                                                           |
|                               |                           | 4.8 (187)                 | 2, 4, 5                                        | 0.3 - 3.0                       | C-12        |                                                         |                     |                               |             |                                                                                 |                                                                           |
|                               |                           | 9.5 (375)                 | 1, 2                                           | 2.0 - 10.0                      | C-14        | 2mΩ max.(initial)<br>4mΩ max.(after durability tests)   |                     |                               |             |                                                                                 |                                                                           |
|                               |                           | Hybrid                    | 0.64+2.3                                       | 12, 13, 18, 20, 23, 28          | —           | C-16                                                    |                     |                               |             |                                                                                 | 5mΩ max.(initial)<br>10mΩ max.(after durability tests)                    |
|                               |                           |                           | 1.0+2.3                                        | 9, 10, 14, 23                   | —           | C-18                                                    |                     |                               |             |                                                                                 |                                                                           |
|                               |                           |                           | 1.0+4.8                                        | 12, 14                          | —           | C-19                                                    |                     |                               |             |                                                                                 |                                                                           |
|                               |                           |                           | 2.3+4.8                                        | 8, 14, 16, 18, 20               | —           | C-20                                                    |                     |                               |             |                                                                                 |                                                                           |
|                               |                           |                           | 4.8+8.0                                        | 6                               | —           | C-21                                                    |                     |                               |             |                                                                                 |                                                                           |
|                               |                           | PCB                       | 1.0                                            | 13                              | —           | C-22                                                    |                     |                               |             | 5mΩ max.(initial)<br>10mΩ max.(after durability tests)                          | 接插件护套端子<br>Housing / PBTG30<br>Terminal / Brass                           |
|                               |                           |                           | 1.0+2.3                                        | 23                              | —           | C-22                                                    |                     |                               |             |                                                                                 |                                                                           |
|                               |                           |                           | 1.0+4.8                                        | 14                              | —           | C-23                                                    |                     |                               |             |                                                                                 |                                                                           |
|                               |                           |                           | 2.3                                            | 6                               | —           | C-23                                                    |                     |                               |             |                                                                                 |                                                                           |
|                               | NH                        | 0.64 (025)                | 3, 4, 8, 10, 12, 16, 24, 32, 40                | 0.22 - 0.75                     | F-02        | 10mΩ max.(initial)<br>30mΩ max.(after durability tests) | 1mA max.            | 100MΩ min.                    | —           | 接插件护套端子<br>Housing / PBT<br>Terminal / Brass, Heat-Resistant Copper Alloy       |                                                                           |
|                               |                           | Hybrid                    | 0.64+2.3                                       | 20                              | —           | F-07                                                    |                     |                               |             |                                                                                 |                                                                           |
|                               | SL                        | 1.5 (060)                 | 4, 12, 14, 16                                  | 0.3 - 2.0                       | I-02        | 3mΩ max.(initial)<br>10mΩ max.(after durability tests)  | 3mA max.            | 100MΩ min.                    | —           | 接插件护套端子<br>Housing / PBT<br>Terminal / Heat-Resistant Copper Alloy              |                                                                           |
|                               |                           | 2.3 (090)                 | 2, 4, 6, 12, 14, 16, 18                        | 0.3 - 2.0                       | I-05        |                                                         |                     |                               |             | 接插件护套端子<br>Housing / PBT<br>Terminal / Brass, Heat-Resistant Copper Alloy       |                                                                           |
|                               |                           | 2.8 (110)                 | 4                                              | 0.3 - 3.0                       | I-08        |                                                         |                     |                               |             | 接插件护套端子<br>Housing / PBT<br>Terminal / Heat-Resistant Copper Alloy              |                                                                           |
|                               |                           | Hybrid                    | 1.5+2.8                                        | 14                              | —           |                                                         |                     |                               |             |                                                                                 | I-10                                                                      |
|                               | DL                        | 0.64 (025)                | 2                                              | 0.22 - 0.75                     | K-02        | 5mΩ max.(initial)<br>10mΩ max.(after durability tests)  | 3mA max.            | 100MΩ min.                    | —           | 接插件护套端子<br>Housing / PBT<br>Terminal / Brass, Heat-Resistant Copper Alloy       |                                                                           |
|                               |                           | 1.0 (040)                 | 4, 8, 12, 16, 20                               | 0.3 - 1.25                      | K-04        | 3mΩ max.(initial)<br>10mΩ max.(after durability tests)  |                     |                               |             |                                                                                 |                                                                           |
|                               |                           | 2.3 (090)                 | 2, 4, 6, 10, 14, 16                            | 0.3 - 2.0                       | K-07        |                                                         |                     |                               |             |                                                                                 |                                                                           |

| unsealed / sealed<br>非防水 / 防水 | Connector Series<br>接插件系列 | Terminal Tab Size<br>端子大小 |               | No. of Way Variation<br>极数种类                 | Applicable Cable Size<br>适用电线大小 | Page<br>刊登页 | Contact Resistance<br>接触电阻（包括压接部）                      | Leak Current<br>漏电流                                    | Insulation Resistance<br>绝缘电阻 | Seal<br>密封性                                                     | Material<br>材质                                              |                                                                                             |                                                                                       |  |  |
|-------------------------------|---------------------------|---------------------------|---------------|----------------------------------------------|---------------------------------|-------------|--------------------------------------------------------|--------------------------------------------------------|-------------------------------|-----------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--|--|
| sealed                        | TS sealed                 | 0.64 (025)                |               | 2, 3, 4, 5, 6, 8, 10, 12, 13, 15, 17, 20, 30 | 0.13 - 0.5                      | B-02        | 8mΩ max.(initial)<br>16mΩ max.(after durability tests) | 50μA max.                                              | 100MΩ min                     | 50kPa min. (initial)<br>30kPa min. (after durability tests)     | 接插件护套<br>端子<br>电线密封栓                                        | Housing / PBT, PA6T<br>Terminal / Brass, Heat-Resistant Copper Alloy<br>Wire Seal / Silicon |                                                                                       |  |  |
|                               |                           | 0.64W (025W)              |               | 4                                            | 0.3 - 0.6                       | B-08        |                                                        |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           | Hybrid                    | 0.64W+2.3+4.8 | 38, 46                                       | —                               | B-10        |                                                        |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           | 2.3 (090)                 |               | 2, 3, 4, 5, 6, 7                             | 0.3 - 2.0                       | B-12        | 3mΩ max.(initial)<br>10mΩ max.(after durability tests) | 100μA max.                                             |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           | 4.8 (187)                 |               | 1, 2, 3                                      | 0.3 - 3.0                       | B-19        |                                                        |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           | 8.0 (312)                 |               | 1, 2                                         | 0.5 - 8.0                       | B-23        |                                                        |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           | Hybrid                    | 0.64+2.3      |                                              | 10, 13, 26                      | —           | B-26                                                   | 8mΩ max.(initial)<br>16mΩ max.(after durability tests) |                               |                                                                 |                                                             |                                                                                             | 50μA max.                                                                             |  |  |
|                               |                           |                           | 0.64+4.8      |                                              | 4, 24, 34, 40, 46               | —           | B-27                                                   |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           |                           | 0.64+2.3+4.8  |                                              | 42, 52                          | —           | B-28                                                   |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           |                           | 2.3+4.8       |                                              | 4, 5, 6, 11                     | —           | B-29                                                   | 3mΩ max.(initial)<br>10mΩ max.(after durability tests) |                               |                                                                 |                                                             |                                                                                             | 100μA max.                                                                            |  |  |
|                               |                           |                           | 4.8+8.0       |                                              | 3                               | —           | B-30                                                   |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               | HV/HVG sealed             |                           | 1.0 (040)     |                                              | 2, 3, 4, 5, 6, 10               | 0.3 - 1.25  | D-02                                                   | 5mΩ max.(initial)<br>10mΩ max.(after durability tests) | 100μA max.                    | 100MΩ min                                                       | 98kPa min. (initial)<br>49kPa min. (after durability tests) | 接插件护套<br>端子<br>电线密封栓                                                                        | Housing / PBT<br>Terminal / Brass, Heat-Resistant Copper Alloy<br>Wire Seal / Silicon |  |  |
|                               | HX sealed                 | 1.0 (040)                 |               | 1, 2, 3, 5, 6, 7                             | 0.3 - 1.25                      | E-02        | 5mΩ max.(initial)<br>10mΩ max.(after durability tests) | 100μA max.                                             | 100MΩ min                     | 98kPa min. (initial)<br>49kPa min. (after durability tests)     | 接插件护套<br>端子<br>电线密封栓                                        | Housing / PBT<br>Terminal / Brass, Heat-Resistant Copper Alloy<br>Wire Seal / Silicon       |                                                                                       |  |  |
|                               |                           | 1.0 (040)                 |               | 23, 33                                       |                                 | E-06        |                                                        |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           | Joint Connector           |               | 23                                           |                                 | E-08        |                                                        |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           | Hybrid Joint Connector    | 0.64+1.0      | 22                                           | —                               | E-10        |                                                        |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           | 1.5 (060)                 |               | 2, 3, 4, 8, 12                               | 0.13 - 2.0                      | E-13        | 3mΩ max.(initial)<br>6mΩ max.(after durability tests)  |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           | 2.3 (090)                 |               | 1, 2, 3, 4                                   | 0.3 - 2.0                       | E-17        | 接插件护套<br>端子<br>电线密封栓                                   |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           | Hybrid                    | 1.0+4.8       |                                              | 13                              | —           |                                                        |                                                        |                               |                                                                 | E-21                                                        | 5mΩ max.(initial)<br>10mΩ max.(after durability tests)                                      |                                                                                       |  |  |
|                               |                           |                           | 1.5+4.8       |                                              | 4, 5                            | —           |                                                        |                                                        |                               |                                                                 | E-21                                                        | 3mΩ max.(initial)<br>6mΩ max.(after durability tests)                                       |                                                                                       |  |  |
|                               |                           |                           | 2.3+4.8       |                                              | 10                              | —           | E-22                                                   |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               | RS                        | 2.3 (090)                 |               | 1, 2, 3, 4, 5, 6, 8                          | 0.3 - 2.0                       | G-02        | 3mΩ max.(initial)<br>10mΩ max.(after durability tests) | 10μA max.                                              | 100MΩ min                     | 98kPa min. (initial)<br>98kPa min. (after durability tests)     | 接插件护套<br>端子<br>电线密封栓                                        | Housing / PBT<br>Terminal / Brass, Heat-Resistant Copper Alloy<br>Wire Seal / Silicon       |                                                                                       |  |  |
|                               | TL                        | 2.3 (090)                 |               | 1, 2, 4, 5                                   | 0.3 - 2.0                       | H-02        | 5mΩ max.(initial)<br>10mΩ max.(after durability tests) | 50μA max.                                              | 100MΩ min                     | 98kPa min. (initial)<br>98kPa min. (after durability tests)     | 接插件护套<br>端子<br>电线密封栓                                        | Housing / PBT<br>Terminal / Brass, Heat-Resistant Copper Alloy<br>Wire Seal / Silicon       |                                                                                       |  |  |
|                               | SL sealed                 | 1.5 (060)                 |               | 2, 3, 14                                     | 0.3 - 2.0                       | J-02        | 3mΩ max.(initial)<br>10mΩ max.(after durability tests) | 100μA max.                                             | 100MΩ min                     | 49.0kPa min. (initial)<br>29.4kPa min. (after durability tests) | 接插件护套<br>端子<br>电线密封栓                                        | Housing / PBT<br>Terminal / Brass, Heat-Resistant Copper Alloy<br>Wire Seal / Silicon       |                                                                                       |  |  |
|                               |                           | 2.3 (090)                 |               | 1, 2, 3, 4, 6                                | 0.3 - 2.0                       | J-06        |                                                        |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               |                           | 8.0 (312)                 |               | 2                                            | 2.0 - 8.0                       | J-09        |                                                        |                                                        |                               |                                                                 |                                                             |                                                                                             |                                                                                       |  |  |
|                               | DL sealed                 | 2.3 (090)                 |               | 1, 2, 3, 4, 6, 8, 10, 12, 16                 | 0.3 - 2.0                       | L-02        | 3mΩ max.(initial)<br>10mΩ max.(after durability tests) | 100μA max.                                             | 100MΩ min                     | 49.0kPa min. (initial)<br>29.4kPa min. (after durability tests) | 接插件护套<br>端子<br>电线密封栓                                        | Housing / PBT<br>Terminal / Brass, Heat-Resistant Copper Alloy<br>Wire Seal / NBR           |                                                                                       |  |  |

Safety, amenity, and functionality, measure the essential performance of an automobile and these predominately depend on in-vehicle electronic controls.

A variety of car electronic devices are systematically connected with each other using "automotive connectors", and the connectors for this purpose are required to be smaller, lighter, and provide direct connection and advanced performance.

At Sumitomo Wiring Systems, we are actively researching and developing components, including terminals and housings, with respect to the "total wiring system," using our experience as an all-round automotive wiring harness manufacturer. This is how we are able to achieve high reliability for our products.

In addition, we are searching for the optimum wiring system and layout, using as little space for wiring as is effectively possible. These are part of our activities to provide services that will further satisfy our customers, and we sincerely ask to be favored with your request for connectors made by Sumitomo Wiring Systems.

对汽车的安全性、舒适性以及功能性等要求，大多取决于电子控制。

这些具有系统性连接各种汽车电子模块功能的「汽车用接插件」，通常要求具有轻量化、小型化、直结化、高功能化等性能。

住友电装以汽车线束综合生产厂商的丰富经验以及“综合汽车线束系统”的视点，积极研究与开发端子、接插件等汽车构成部品，为提高产品的高信赖性而进行着不断的努力。

并且利用有限的配线空间内，不断地追求高效率的汽车线束系统，及其最佳配线布局。为客户提供更满意的服务，敬请定购使用住友电装的汽车用接插件。

### General Notes 关于汽车用接插件目录的查阅方法

- All length and area units in this catalog shall marked millimeter (mm) and square millimeter (mm<sup>2</sup>).
- This catalog focuses on series of terminals, housings, and does not include terminals and housings not involved in these series. Similarly, some other series and custom-made parts are not included. Please contact our sales staff for details.
- We have also prepared a separate "Automotive Wire, Convuluted Tube" catalog, made by Sumitomo Wiring Systems, and suitable for the connectors. This catalog can be obtained from our sales staff.
- 该目录中的长度单位全部为 mm(毫米)、面积的单位全部为 mm<sup>2</sup>(平方毫米)。
- 该目录主要是以成为系列的端子、接插件编写。未包括在系列中的端子、接插件护套及一部分系列、定制开发产品未予记载，详细内容请向敝公司销售负责人问讯。
- 另外，还备有最适合接插件的住友电装的「汽车用电线、波纹管」目录，需要时请向敝公司销售负责人索取。

### Digital catalog 电子目录

A digital connector catalog is available on the Sumitomo Wiring Systems home page.

Digital catalogue has connectors which are not on this catalogue.

住友电装主页中刊登有「接插件电子目录」。

在电子目录中还刊登有该目录中未予记载的接插件。

**URL: <http://www.sws.co.jp>**

\* Product specifications may be subject to change without notice.

Before using the product, please obtain a "customer drawing" "Specifications" "Instruction Manuals" from our sales staff.

※产品式样变更时可能不另行告知。

使用产品时，请向敝公司销售负责人索取「客户用图纸」「仕様书」「使用说明书」。

# TS SERIES

A close-up photograph of several white TS Series connectors attached to thin, silver-colored wires. The connectors are rectangular with a small, raised locking mechanism on top. The wires are bundled together and extend from the bottom left towards the top right of the frame.

## Features

The TS connector series has a mechanism of terminal position assurance.

This series consists of 0.64mm, 1.5mm, 2.3mm, 4.8mm and 8.0mm types classified according to terminal size, covering an extensive array of applications from signal to power circuits.

- The connector mechanism only allows the retainer to be set when the terminal is completely inserted.
- Retainers are pre-mounted on connector housings, and are structured to enable setting by the same simple operation regardless of the number of ways, improving operability.
- These connectors can be directly secured to a support on the car body.
- PCB models are also available for connection to printed circuit boards.
- RoHS/ELV Compliant

## 特点

TS 系列接插件具有检测端子插入不足的功能。

按照端子尺寸划分为0.64mm·1.5mm·2.3mm·4.8mm·8.0mm，从信号回路到电源回路，能广泛应用。


- 它具有当端子在半插入状态时，锁片无法安装的结构。
- 锁片预先组装在接插件护套上，无论多少极数都能通过简单操作进行组合，有助于提高操作效率。
- 接插件可以直接固定在车体的支架上。
- 我们还设定了能适用于印制线路板的 PCB 接插件。
- 可对应欧盟 RoHS 和 ELV 指令

# TS SERIES for STANDARD

0.64mm (025)

A-02

Structure / 构造

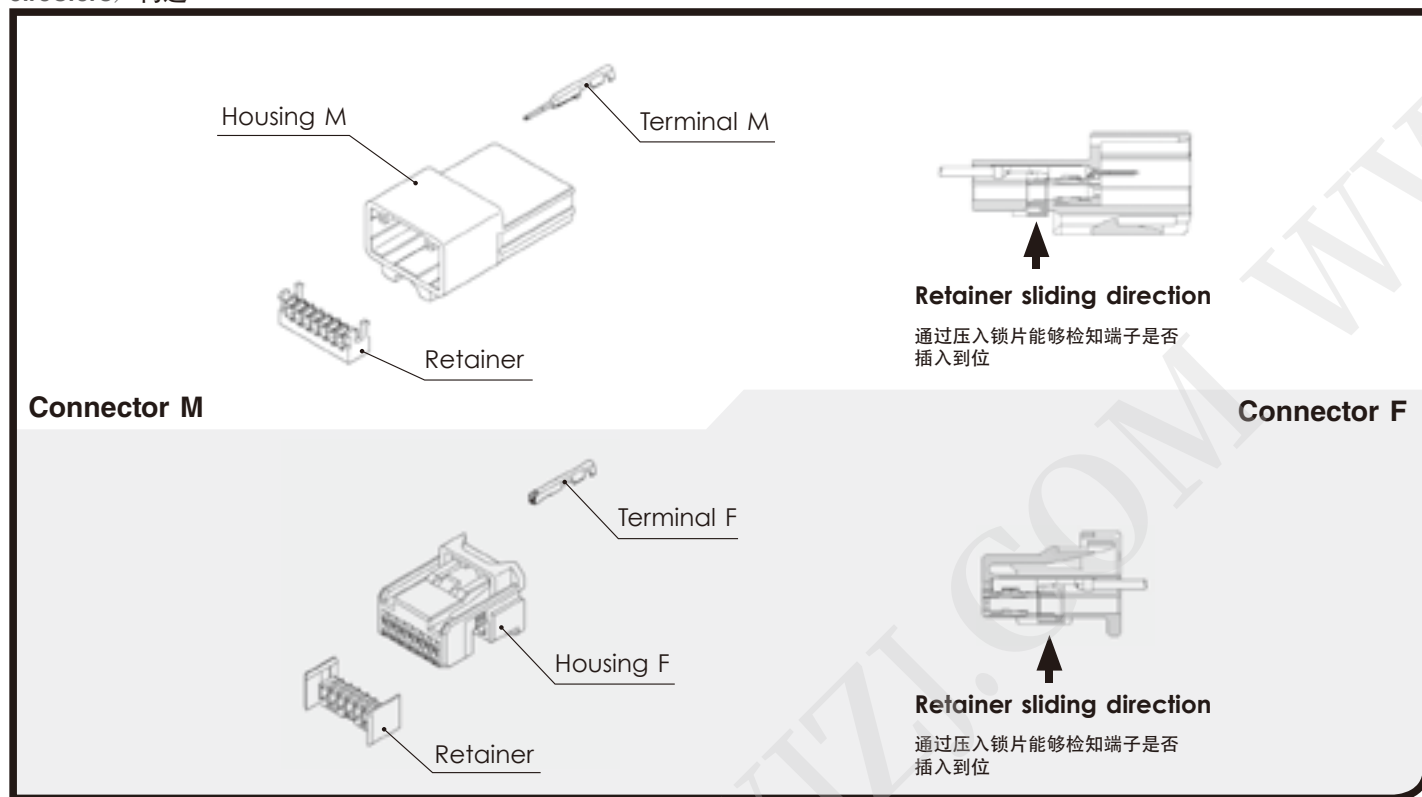


0.64mm (025)

Terminal (UNIT : mm)



端子(毫米)

**(S)**


|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.13             |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**(S)****Au**

|                                              |                   |
|----------------------------------------------|-------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.13              |
| <b>Material</b><br>材 质                       | Brass<br>黄铜       |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金 |

**M (8230-4878)****F (8240-0182)**


|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.13                           |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8230-5136)****F (8240-0338)**



|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.13                           |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**(M)**


|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.22~0.35        |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**(M)****Au**

|                                              |                   |
|----------------------------------------------|-------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.22~0.35         |
| <b>Material</b><br>材 质                       | Brass<br>黄铜       |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金 |

**M (8100-3622)****F (8100-3624)**


|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.22~0.35                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3626)****F (8100-3628)**



|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.22~0.35                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**(L)**


|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5          |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**(L)****Au**

|                                              |                   |
|----------------------------------------------|-------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5           |
| <b>Material</b><br>材 质                       | Brass<br>黄铜       |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金 |

**M (8100-3623)****F (8100-3625)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3627)****F (8100-3629)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

0.64mm (025)

A-04

Housing (UNIT : mm)


接插件护套(毫米)

Ref: Terminal part No. A-02  
端子参照页

Material PBT  
材 质


2way

Color Natural  
颜 色 自然色



M (6098-6653)


F (6098-6662)



Color Natural  
颜 色 自然色


5way

Color Natural  
颜 色 自然色



M (6098-3802)


F (6098-3810)



Color Natural  
颜 色 自然色


10way

Color Natural  
颜 色 自然色



M (6098-3869)


F (6098-3909)



Color Natural  
颜 色 自然色


14way

Color Natural  
颜 色 自然色



M (6098-3877)


F (6098-3917)



Color Natural  
颜 色 自然色

14way



F (6098-7241)




Color Natural  
颜 色 自然色

**16way**


Color Natural  
颜色 自然色

**M (6098-7336)****F (6098-4008)**


Color Natural  
颜色 自然色

**16way****F (6098-6688)**

Color Natural  
颜色 自然色

**16way****F (6098-6694)**



Color Natural  
颜色 自然色

**19way****F (6098-7231)**


Color Natural  
颜色 自然色

**22way**


Color Natural  
颜色 自然色

**M (6098-3885)****F (6098-3925)**


Color Natural  
颜色 自然色

**24way****F (6098-4010)**


Color Natural  
颜色 自然色

**24way****F (6098-6682)**

Color Natural  
颜色 自然色

**28way****F (6098-4756)**

Color Natural  
颜色 自然色

**32way****F (6098-4013)**


Color Natural  
颜色 自然色

**A-05**

TS SERIES

36way

F (6098-4740)




Color  
颜色

Natural  
自然色

40way

F (6098-4015)




Color  
颜色

Natural  
自然色

40way

F (6098-4831)



Color  
颜色

Natural  
自然色

WWW.DZYTJZJ.COM



# TS SERIES for STANDARD

1.5mm (060)

Structure / 构造



A-07

TS SERIES

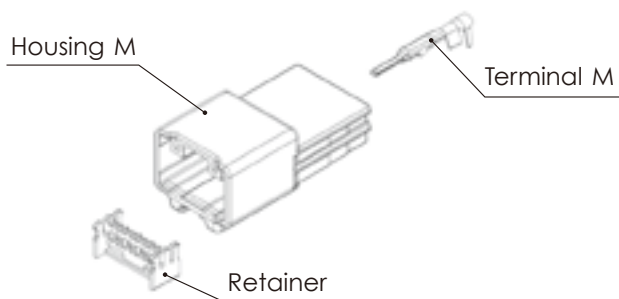

Connector M

Connector F

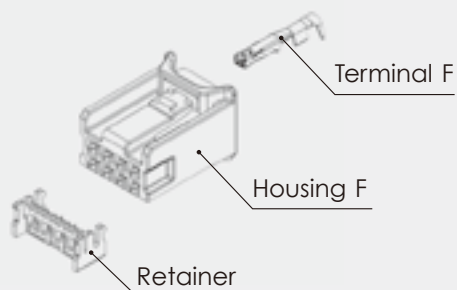

Retainer sliding direction  
通过压入锁片能够检知端子是否  
插入到位

1.5mm (060)

A-08

Terminal (UNIT : mm)

端子 (毫米)

(3S)


F (8240-0339)



|                                         |                             |
|-----------------------------------------|-----------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.13                        |
| Material<br>材 质                         | Heat-resistant copper alloy |
| Surface treatment<br>表面处理               | Tin-plated 镀锡               |

(SS)


F (8240-0279)



|                                         |                             |
|-----------------------------------------|-----------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.22~0.35                   |
| Material<br>材 质                         | Heat-resistant copper alloy |
| Surface treatment<br>表面处理               | Tin-plated 镀锡               |


(M)

|                                         |               |
|-----------------------------------------|---------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.75~1.25     |
| Material<br>材 质                         | Brass 黄铜      |
| Surface treatment<br>表面处理               | Tin-plated 镀锡 |



M (8230-4924)


F (8240-0213)



|                                         |                             |
|-----------------------------------------|-----------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.75~1.25                   |
| Material<br>材 质                         | Heat-resistant copper alloy |
| Surface treatment<br>表面处理               | Tin-plated 镀锡               |


(S)

|                                         |               |
|-----------------------------------------|---------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.3~0.5       |
| Material<br>材 质                         | Brass 黄铜      |
| Surface treatment<br>表面处理               | Tin-plated 镀锡 |



M (8230-4925)


F (8240-0215)



|                                         |                             |
|-----------------------------------------|-----------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.3~0.5                     |
| Material<br>材 质                         | Heat-resistant copper alloy |
| Surface treatment<br>表面处理               | Tin-plated 镀锡               |


(L)

|                                         |                             |
|-----------------------------------------|-----------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 2.0                         |
| Material<br>材 质                         | Heat-resistant copper alloy |
| Surface treatment<br>表面处理               | Tin-plated 镀锡               |



M (8230-4923)

F (8240-0214)



|                                         |                             |
|-----------------------------------------|-----------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 2.0                         |
| Material<br>材 质                         | Heat-resistant copper alloy |
| Surface treatment<br>表面处理               | Tin-plated 镀锡               |

1.5mm (060)

A-09

TS SERIES

## Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No.

端子参照页

A-08

Material


材质

PBT

### 2way


Color  
颜色

Natural  
自然色



M (6098-6050)

F (6098-6053)




Color  
颜色

Natural  
自然色

### 4way


Color  
颜色

Natural  
自然色



M (6098-5668)

F (6098-5677)




Color  
颜色

Natural  
自然色

### 8way


Color  
颜色

Natural  
自然色



M (6098-5686)

F (6098-5695)




Color  
颜色

Natural  
自然色

### 12way


Color  
颜色

Natural  
自然色



M (6098-5704)

F (6098-5713)



Color  
颜色

Natural  
自然色




Sumitomo Wiring Systems, Ltd.

# TS SERIES for STANDARD

## 2.3mm (090)

A-10

Structure / 构造

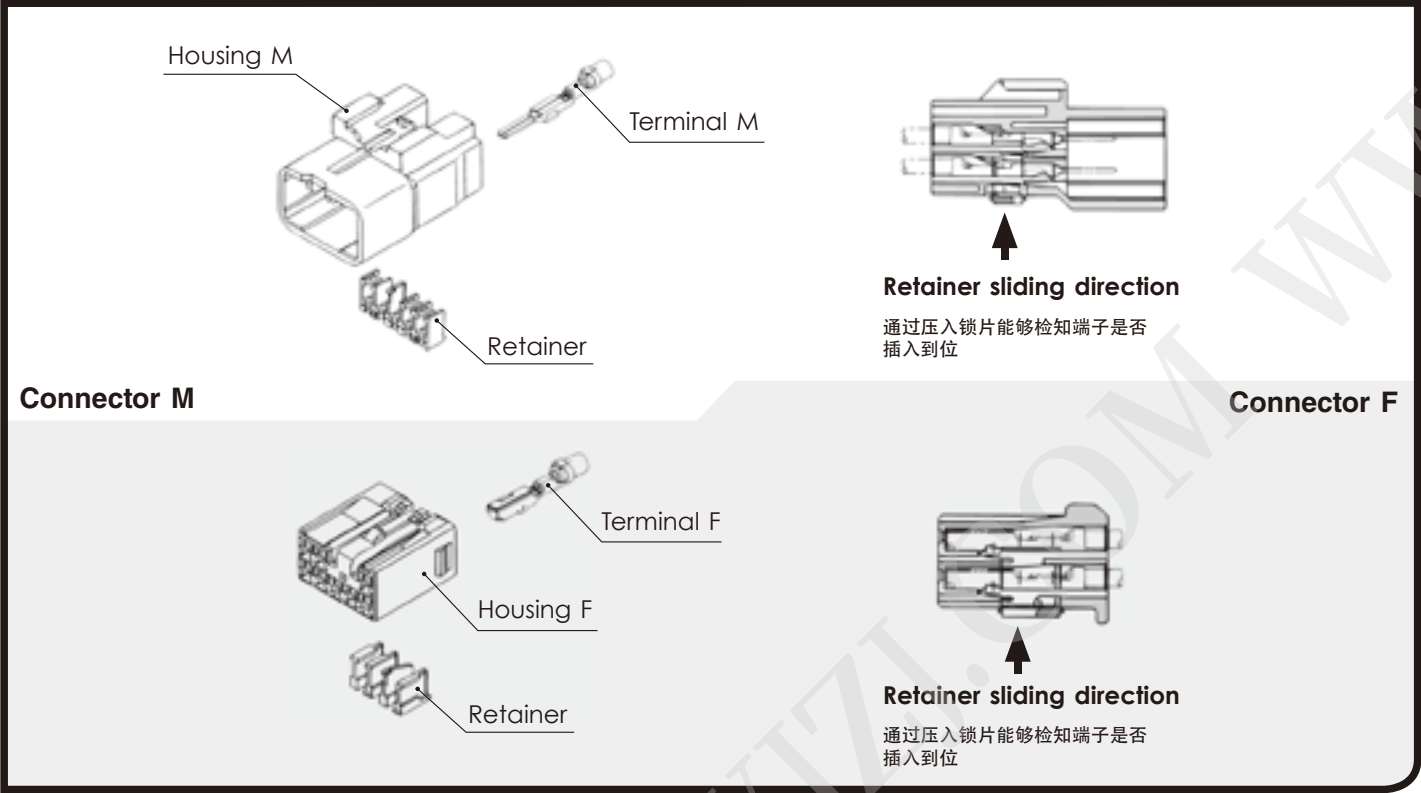


2.3mm (090)

Terminal (UNIT : mm)

端子(毫米)


(SS)

|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.22~0.35        |
| Material<br>材质                          | Brass<br>黄铜      |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡 |



M (8230-4742)

F (8240-0029)



|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.22~0.35        |
| Material<br>材质                          | Brass<br>黄铜      |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡 |

**(S)**Cable size (mm<sup>2</sup>) 0.3~0.5



适用电线大小

Material Brass

材质 黄铜

Surface treatment Tin-plated

表面处理 镀锡

**M (8230-4492)****F (8240-4882)**Cable size (mm<sup>2</sup>)

适用电线大小

0.3~0.5

Material Brass

材质 黄铜

Surface treatment Tin-plated

表面处理 镀锡

**(S)****Au**Cable size (mm<sup>2</sup>) 0.3~0.5



适用电线大小

Material Brass

材质 黄铜

Surface treatment Gold-plated

表面处理 镀金

**M (8100-1341)****F (8100-1346)**Cable size (mm<sup>2</sup>)

适用电线大小

0.3~0.5

Material Brass

材质 黄铜

Surface treatment Gold-plated

表面处理 镀金

**(M)**Cable size (mm<sup>2</sup>) 0.5~1.25



适用电线大小

Material Brass

材质 黄铜

Surface treatment Tin-plated

表面处理 镀锡

**M (8230-4502)****F (8240-4892)**Cable size (mm<sup>2</sup>)

适用电线大小

0.5~1.25

Material Brass

材质 黄铜

Surface treatment Tin-plated

表面处理 镀锡

**(M)****Au**Cable size (mm<sup>2</sup>) 0.5~1.25



适用电线大小

Material Brass

材质 黄铜

Surface treatment Gold-plated

表面处理 镀金

**M (8100-1342)****F (8100-1347)**Cable size (mm<sup>2</sup>)

适用电线大小

0.5~1.25

Material Brass

材质 黄铜

Surface treatment Gold-plated

表面处理 镀金

**(L)**Cable size (mm<sup>2</sup>) 2.0



适用电线大小

Material Brass

材质 黄铜

Surface treatment Tin-plated

表面处理 镀锡

**M (8230-4512)****F (8240-4942)**Cable size (mm<sup>2</sup>)

适用电线大小

2.0

Material Heat-resistant

材质 耐热铜合金


Surface treatment Tin-plated

表面处理 镀锡

# 2.3mm (090)


## 2way

|                 |                |
|-----------------|----------------|
| Material<br>材 质 | PA6T           |
| Color<br>颜 色    | Natural<br>自然色 |



### M (6520-0549)

### F (6520-0550)



|                 |                |
|-----------------|----------------|
| Material<br>材 质 | PA6T           |
| Color<br>颜 色    | Natural<br>自然色 |



## Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No. A-10  
端子参照页


## 6way

|                 |                                   |
|-----------------|-----------------------------------|
| Material<br>材 质 | PBT                               |
| Color<br>颜 色    | Natural<br>自然色                    |
| Note<br>备 注     | With clamp for 7mm dia.<br>带φ7用卡钉 |




### M (6240-1107)

|                 |                                     |
|-----------------|-------------------------------------|
| Material<br>材 质 | PBT                                 |
| Color<br>颜 色    | Natural<br>自然色                      |
| Note<br>备 注     | With body fastening clamp.<br>带防转卡钉 |



### M (6249-1243)


### F (6240-5118)



|                 |                |
|-----------------|----------------|
| Material<br>材 质 | PBT            |
| Color<br>颜 色    | Natural<br>自然色 |

## 6way


### M (6240-1120)



|                 |                |
|-----------------|----------------|
| Material<br>材 质 | PBT            |
| Color<br>颜 色    | Natural<br>自然色 |


## 9way

|                 |                |
|-----------------|----------------|
| Material<br>材 质 | PBT            |
| Color<br>颜 色    | Natural<br>自然色 |



### M (6249-1229)


### F (6248-5270)



|                 |                |
|-----------------|----------------|
| Material<br>材 质 | PBT            |
| Color<br>颜 色    | Natural<br>自然色 |

## 8way


### M (6240-1077)



|                 |                |
|-----------------|----------------|
| Material<br>材 质 | PBT            |
| Color<br>颜 色    | Natural<br>自然色 |


## 10way

|                |                |
|----------------|----------------|
| Material<br>材质 | PBT            |
| Color<br>颜色    | Natural<br>自然色 |



M (6249-1235)


F (6248-5276)



|                |                |
|----------------|----------------|
| Material<br>材质 | PBT            |
| Color<br>颜色    | Natural<br>自然色 |


## 11way

|                |                |
|----------------|----------------|
| Material<br>材质 | PBT            |
| Color<br>颜色    | Natural<br>自然色 |



M (6249-1234)


F (6248-5275)



|                |                |
|----------------|----------------|
| Material<br>材质 | PBT            |
| Color<br>颜色    | Natural<br>自然色 |


## 12way

|                |                |
|----------------|----------------|
| Material<br>材质 | PBT            |
| Color<br>颜色    | Natural<br>自然色 |



M (6520-1009)


F (6520-1004)



|                |                |
|----------------|----------------|
| Material<br>材质 | PBT            |
| Color<br>颜色    | Natural<br>自然色 |


## 13way

|                |                |
|----------------|----------------|
| Material<br>材质 | PBT            |
| Color<br>颜色    | Natural<br>自然色 |



M (6240-1122)


F (6240-5175)



|                |                |
|----------------|----------------|
| Material<br>材质 | PBT            |
| Color<br>颜色    | Natural<br>自然色 |


## 16way

|                |                |
|----------------|----------------|
| Material<br>材质 | PBT            |
| Color<br>颜色    | Natural<br>自然色 |



M (6240-1158)


F (6240-5088)



|                |                |
|----------------|----------------|
| Material<br>材质 | PBT            |
| Color<br>颜色    | Natural<br>自然色 |

## 20way

|                |                |
|----------------|----------------|
| Material<br>材质 | PBT            |
| Color<br>颜色    | Natural<br>自然色 |



M (6240-1033)

F (6240-5035)




|                |                |
|----------------|----------------|
| Material<br>材质 | PBT            |
| Color<br>颜色    | Natural<br>自然色 |

# TS SERIES for STANDARD

4.8mm (187)

A-14

Structure / 构造

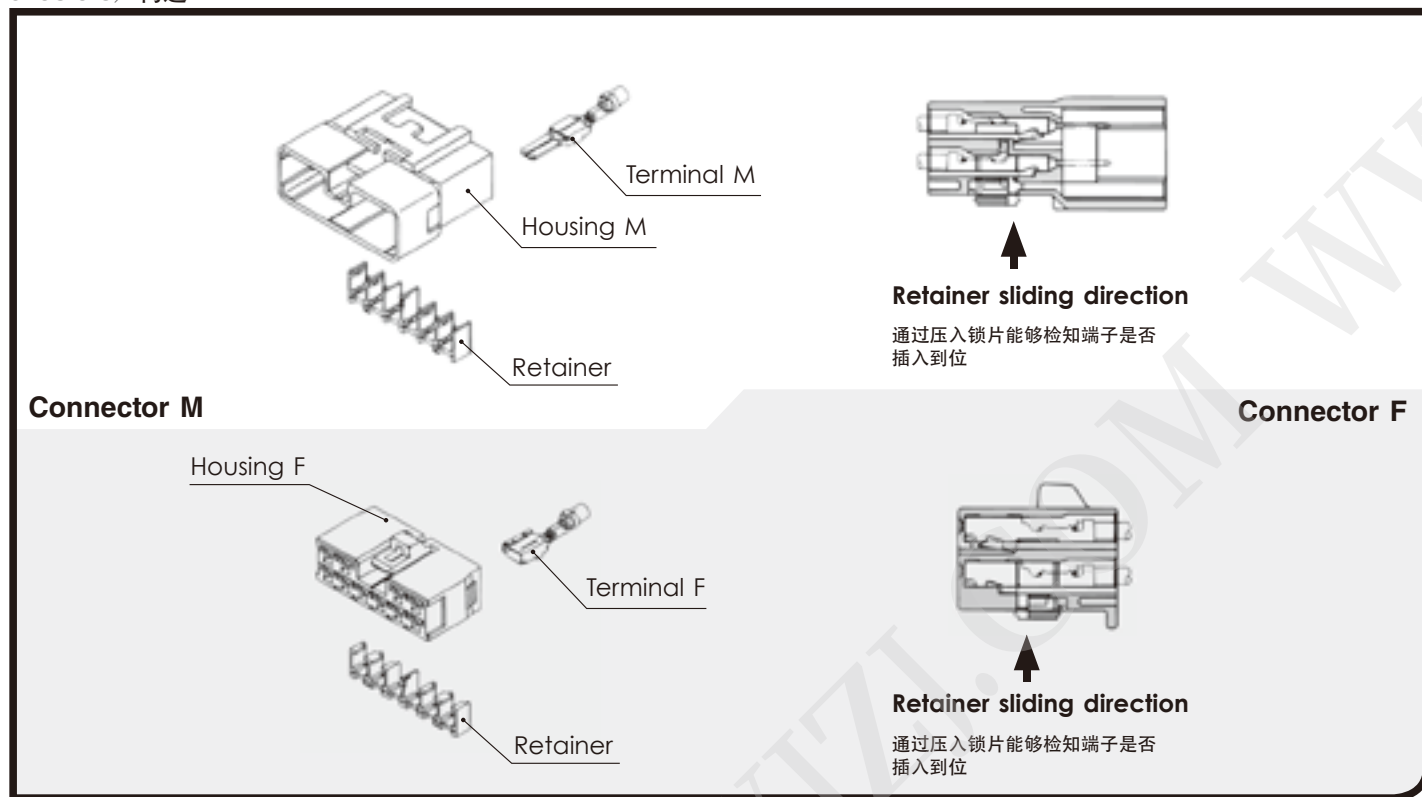


4.8mm (187)


Terminal (UNIT : mm)

端子(毫米)

(S)


Cable size (mm<sup>2</sup>) 0.3~0.5  
适用电线大小Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡

(M)

Cable size (mm<sup>2</sup>) 0.5~1.25  
适用电线大小Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡


M (8230-4522)

F (8240-4912)


Cable size (mm<sup>2</sup>) 0.3~0.5  
适用电线大小Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡

M (8230-4532)

F (8240-4922)


Cable size (mm<sup>2</sup>) 0.5~1.25  
适用电线大小Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡

(L)

Cable size (mm<sup>2</sup>) 2.0~3.0  
适用电线大小Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡


M (8230-4542)

F (8240-4932)

Cable size (mm<sup>2</sup>) 2.0~3.0  
适用电线大小Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡

(L)

F (8100-1555)

Cable size (mm<sup>2</sup>) 2.0~3.0  
适用电线大小Material Heat-resistant  
铜合金Surface treatment Tin-plated  
表面处理 镀锡

4.8mm (187)

Housing (UNIT : mm)

接插件护套(毫米)


Ref: Terminal part No.  
端子参照页

A-14

Material  
材质


PBT

1way

Color Natural  
颜色 自然色

M (6098-0822)


F (6098-0824)

Color Natural  
颜色 自然色

2way

Color  
颜色


Natural  
自然色



17.4  
20.4  
39

M (6098-0323)

F (6098-0325)



18.75  
18.1  
22


Color  
颜色

Natural  
自然色

2way

Color  
颜色


Natural  
自然色



17.4  
20.4  
39

M (6098-0469)

F (6098-0471)



18.75  
18.1  
22


Color  
颜色

Natural  
自然色

3way

Color  
颜色


Natural  
自然色



21.5  
23.3  
39

M (6098-0149)

F (6098-0151)



20.1  
19.4  
22


Color  
颜色

Natural  
自然色

4way

Color  
颜色


Natural  
自然色



29.8  
22.8  
39.5

M (6098-1851)

F (6098-1489)



25.9  
20.1  
22


Color  
颜色

Natural  
自然色

6way

Color  
颜色


Natural  
自然色



29.8  
29.6  
42.5

M (6098-2211)

F (6098-1716)



25.9  
26.9  
22


Color  
颜色

Natural  
自然色

8way

Color  
颜色

Natural  
自然色



26.6  
30.1  
22

F (6098-0518)

Color  
颜色


Natural  
自然色

## 10way

Color  
颜色


---

Natural  
自然色



**M (6098-0154)**

**F (6098-0156)**



Color  
颜色

Natural  
自然色

A-17


TS SERIES

# TS SERIES for STANDARD

## 8.0mm (312)

A-18

Structure / 构造

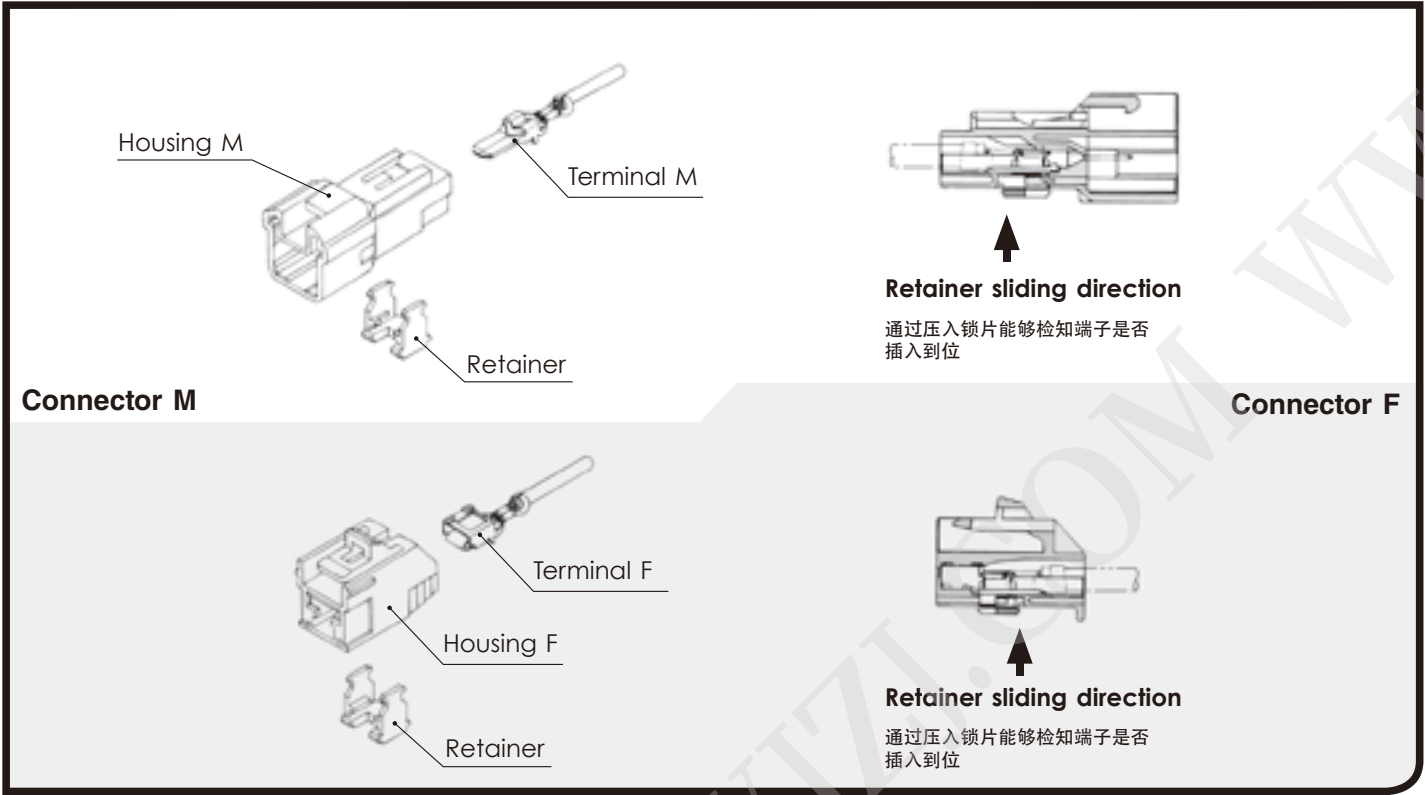


8.0mm (312)

Terminal (UNIT : mm)

端子(毫米)


(S)

|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.5~1.25         |
| Material<br>材质                          | Brass<br>黄铜      |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡 |



M (8100-0520)

F (8100-0707)





|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.5~1.25         |
| Material<br>材质                          | Brass<br>黄铜      |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡 |

**(M)**

**Cable size (mm<sup>2</sup>)** 2.0~3.0  
**适用电线大小**

**Material** Brass  
**材质** 黄铜

**Surface treatment** Tin-plated  
**表面处理** 镀锡

**M (8100-0521)****F (8100-2493)**

**Cable size (mm<sup>2</sup>)** 2.0~3.0  
**适用电线大小**

**Material** Heat-resistant copper alloy  
**材质**


**Surface treatment** Tin-plated  
**表面处理** 镀锡

**(L)**

**Cable size (mm<sup>2</sup>)** 5.0~8.0  
**适用电线大小**

**Material** Brass  
**材质** 黄铜

**Surface treatment** Tin-plated  
**表面处理** 镀锡

**M (8100-0522)****F (8100-1553)**

**Cable size (mm<sup>2</sup>)** 5.0~8.0  
**适用电线大小**

**Material** Heat-resistant copper alloy  
**材质**

**Surface treatment** Tin-plated  
**表面处理** 镀锡

**8.0mm (312)****Housing (UNIT : mm)**

接插件护套(毫米)

**Ref: Terminal part No.**

端子参照页

A-18



**Material**

材质

PBT

**1way**



**Color** Natural  
**颜色** 自然色

**M (6240-1093)****F (6098-0441)**


**Color** Natural  
**颜色** 自然色

**2way**


**Color** Natural  
**颜色** 自然色

**M (6098-1278)****F (6098-1104)**

**Color** Natural  
**颜色** 自然色

**3way****F (6520-1466)**

**Color** Natural  
**颜色** 自然色

**4way****F (6098-2137)**

**Color** Natural  
**颜色** 自然色

A-19

TS SERIES

TS SERIES  
for HYBRID

0.64mm, 1.5mm  
(025, 060)

Housing (UNIT : mm)

接插件护套(毫米)


Ref: Terminal part No. [0.64mm] A-02  
端子参照页 [1.5mm] A-08

Material PBT  
材 质

No. of way/ ( ) corresponds to 0.64mm, 1.5mm, in order from left to right.  
极数/ ( ) 内显示 : 从左向右为0.64mm 极数、1.5mm 极数


12way (4+8)

Color Natural  
颜 色 自然色



M (6098-6055)


F (6098-6083)



Color Natural  
颜 色 自然色


12way (6+6)

Color Natural  
颜 色 自然色



M (6098-6104)


F (6098-6111)



Color Natural  
颜 色 自然色


12way (8+4)

Color Natural  
颜 色 自然色



M (6098-6090)


F (6098-6097)



Color Natural  
颜 色 自然色


18way (8+10)

Color Natural  
颜 色 自然色



M (6098-5650)



F (6098-5659)



Color Natural  
颜 色 自然色

**18way (10+8)**



|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜色           | 自然色     |

**M (6098-5594)****F (6098-5604)**

|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜色           | 自然色     |

**18way (12+6)**



|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜色           | 自然色     |

**M (6098-5631)****F (6098-5641)**

|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜色           | 自然色     |

**20way (16+4)**

|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜色           | 自然色     |

**M (6098-5613)****F (6098-5622)**

|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜色           | 自然色     |

**0.64mm, 2.3mm**  
(025, 090)**Housing** (UNIT : mm)

接插件护套(毫米)



|                               |               |
|-------------------------------|---------------|
| <b>Ref: Terminal part No.</b> | [0.64mm] A-02 |
| 端子参照页                         | [2.3mm] A-10  |

|                 |     |
|-----------------|-----|
| <b>Material</b> | PBT |
| 材质              |     |

No. of way/ ( ) corresponds to 0.64mm, 2.3mm, in order from left to right.  
极数/ ( ) 内显示: 从左向右为0.64mm 极数、2.3mm 极数

**17way (8+9)**



|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜色           | 自然色     |

**M (6098-3893)****F (6098-3933)**

|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜色           | 自然色     |

**18way (10+8)**



|       |         |
|-------|---------|
| Color | Natural |
| 颜色    | 自然色     |

**M (6098-3901)****F (6098-3941)**

|       |         |
|-------|---------|
| Color | Natural |
| 颜色    | 自然色     |

**20way (16+4)**

|       |         |
|-------|---------|
| Color | Natural |
| 颜色    | 自然色     |

**M (6098-3818)****F (6098-3826)**

|       |         |
|-------|---------|
| Color | Natural |
| 颜色    | 自然色     |


**0.64mm, 4.8mm  
(025, 187)****Housing (UNIT : mm)**

接插件护套(毫米)

|                        |               |
|------------------------|---------------|
| Ref: Terminal part No. | [0.64mm] A-02 |
| 端子参照页                  | [4.8mm] A-14  |

|          |     |
|----------|-----|
| Material | PBT |
| 材质       |     |

No. of way/ ( ) corresponds to 0.64mm, 4.8mm, in order from left to right.  
极数 / ( ) 内显示: 从左向右为0.64mm 极数、4.8mm 极数

**20way (18+2)****F (6098-5903)**

|       |         |
|-------|---------|
| Color | Natural |
| 颜色    | 自然色     |

**2.3mm, 4.8mm  
(090, 187)****Housing (UNIT : mm)**

接插件护套(毫米)



|                        |              |
|------------------------|--------------|
| Ref: Terminal part No. | [2.3mm] A-10 |
| 端子参照页                  | [4.8mm] A-14 |

|          |     |
|----------|-----|
| Material | PBT |
| 材质       |     |

No. of way/ ( ) corresponds to 2.3mm, 4.8mm, in order from left to right.  
极数 / ( ) 内显示: 从左向右为2.3mm 极数、4.8mm 极数

**14way (12+2)**

|       |         |
|-------|---------|
| Color | Natural |
| 颜色    | 自然色     |


**M (6241-0261)****F (6245-0281)**

|       |         |
|-------|---------|
| Color | Natural |
| 颜色    | 自然色     |

## 15way (12+3)


Color  
颜色

Natural  
自然色



M (6241-0241)

F (6245-0261)




Color  
颜色

Natural  
自然色

## 20way (18+2)


Color  
颜色

Natural  
自然色



M (6241-0281)

F (6245-0301)



Color  
颜色

Natural  
自然色

A-23

TS SERIES

TS SERIES  
for PCB


0.64mm (025)

Housing (UNIT : mm)  
接插件护套(毫米)


16way

M (6098-6790)


|                                   |                  |
|-----------------------------------|------------------|
| Connector F part No.<br>母端接插件产品号码 | 6098-4008 (A-05) |
| Material<br>材 质                   | PBT              |
| Color<br>颜 色                      | Natural<br>自然色   |



●Detailed dimension  
详细尺寸




●Recommended dimension of Circuit board  
电路板推荐尺寸




16way

M (6098-6793)


|                                   |                  |
|-----------------------------------|------------------|
| Connector F part No.<br>母端接插件产品号码 | 6098-4008 (A-05) |
| Material<br>材 质                   | SPS              |
| Color<br>颜 色                      | Natural<br>自然色   |



●Detailed dimension  
详细尺寸




●Recommended dimension of Circuit board  
电路板推荐尺寸




33way

M (6098-7229)


|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Connector F part No.<br>母端接插件产品号码 | 6098-7231 (A-05)<br>6098-7241 (A-04) |
| Material<br>材 质                   | SPS                                  |
| Color<br>颜 色                      | Natural<br>自然色                       |



●Detailed dimension  
详细尺寸



●Recommended dimension of Circuit board  
电路板推荐尺寸




### 36way

#### M (6098-6796)


Connector F part No. 6098-4740 (A-06)  
母端接插件产品号码

Material PBT  
材 质


Color Natural  
颜 色

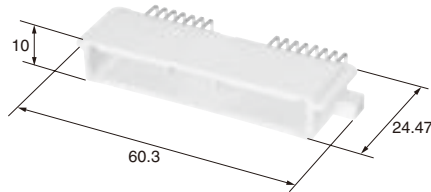

#### ●Detailed dimension 详细尺寸



#### ●Recommended dimension of Circuit board 电路板推荐尺寸




### 36way

#### M (6098-6798)


Connector F part No. 6098-4740 (A-06)  
母端接插件产品号码

Material SPS  
材 质


Color Natural  
颜 色

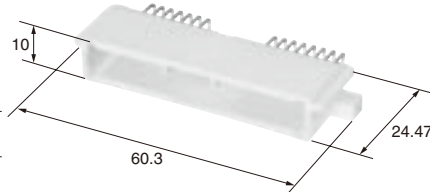

#### ●Detailed dimension 详细尺寸



#### ●Recommended dimension of Circuit board 电路板推荐尺寸




### 56way (16+16+24)

#### M (6098-6848)


Connector F part No. 6098-6688 (A-05)  
母端接插件产品号码

Material SPS  
材 质


Color Natural  
颜 色

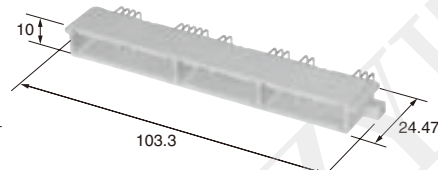

#### ●Detailed dimension 详细尺寸



#### ●Recommended dimension of Circuit board 电路板推荐尺寸




### 60way (36+24)

#### M (6098-6803)


Connector F part No. 6098-4010 (A-05)  
母端接插件产品号码

Material SPS  
材 质


Color Natural  
颜 色

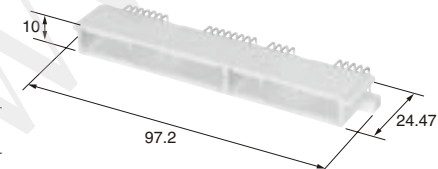

#### ●Detailed dimension 详细尺寸



#### ●Recommended dimension of Circuit board 电路板推荐尺寸




### 68way (40+28)

#### M (6098-6805)


Connector F part No. 6098-4756 (A-05)  
母端接插件产品号码

Material PBT  
材 质


Color Natural  
颜 色

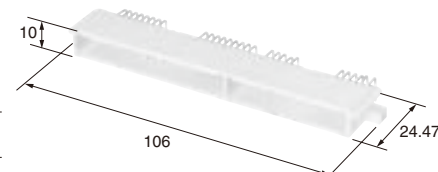

#### ●Detailed dimension 详细尺寸




#### ●Recommended dimension of Circuit board 电路板推荐尺寸




**M (6098-7102)**

**Connector F part No.** 6098-4756 (A-05)  
**母端接插件产品号码** 6098-4831 (A-06)


|                 |                |
|-----------------|----------------|
| Material<br>材 质 | SPS            |
| Color<br>颜 色    | Natural<br>自然色 |

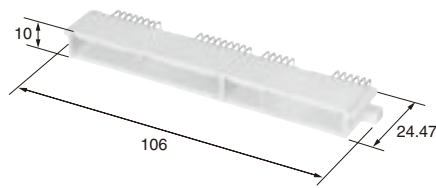

● Detailed dimension  
详细尺寸



●Recommended demension of Circuit board  
电路板推荐尺寸




**68way (40+28)**


**M (6098-6810)**

|                      |                  |
|----------------------|------------------|
| Connector F part No. | 6098-4756 (A-05) |
| 母端接插件产品号码            | 6098-4015 (A-06) |


|                        |           |
|------------------------|-----------|
| <b>Material</b><br>材 质 | PBT       |
| <b>Color</b><br>颜 色    | Blue<br>蓝 |

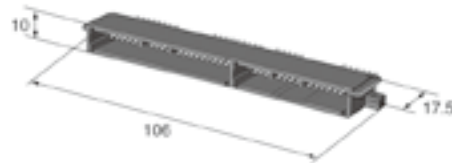

● Detailed dimension  
详细尺寸



●Recommended demension of Circuit board  
电路板推荐尺寸



**0.64mm, 1.5mm (025, 060)**

## Housing (UNIT : mm)

接插件护套(毫米)


No. of way/ ( ) corresponds to 0.64mm, 1.5mm, in order from left to right.  
极数/( )内显示: 从左向右为0.64mm极数、1.5mm极数

**20way (14+6)**


## M (6098-6869)

Connector F part No. 6098-6876 (A-●)  
母端接插件产品号码


|                 |            |
|-----------------|------------|
| Material<br>材 质 | LCP        |
| Color<br>颜 色    | Black<br>黑 |



●Detailed dimension  
详细尺寸



●Recommended dimension of Circuit board  
电路板推荐尺寸



# TS SEALED SERIES

## Features

The TS sealed connector series has a mechanism of terminal position assurance. This series consists of 0.64mm, 2.3mm, 4.8mm and 8.0mm types classified according to terminal size, covering an extensive array of applications from signal to power circuits.

- Retainers are pre-mounted on the connector housing, and are structured to enable setting by the same simple operation regardless of the number of ways, improving operability.
- These connectors can be directly secured to a bracket on the car body.
- RoHS/ELV Compliant

## 特 点



TS 防水系列接插件具有检测端子插入不足的结构。按照端子尺寸划分为0.64mm·2.3mm·4.8mm·8.0mm，从信号回路到电源回路，能广泛应用。

- 锁片预先组装在接插件护套上，无论多少极数都能通过简单操作组合，有助于提高操作效率。
- 接插件可以直接固定在车体的支架上。
- 可对应欧盟 RoHS 和 ELV 指令


# TS SEALED SERIES for STANDARD

0.64mm (025)


Structure / 构造

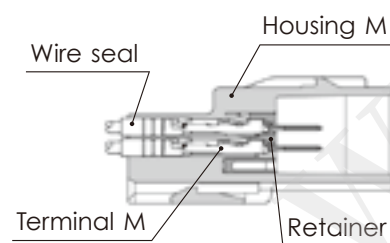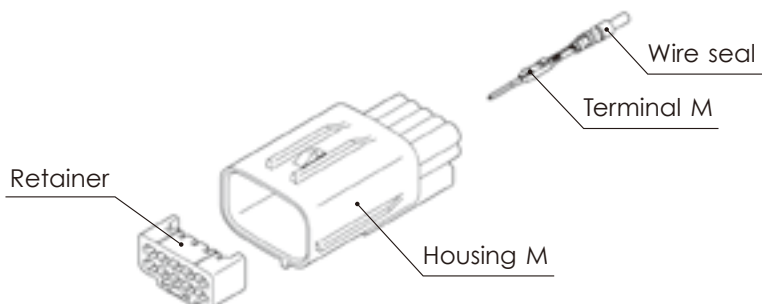

**Connector M**

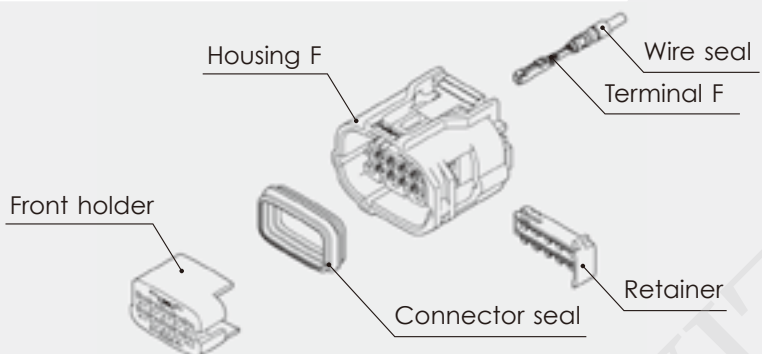

**Connector F**

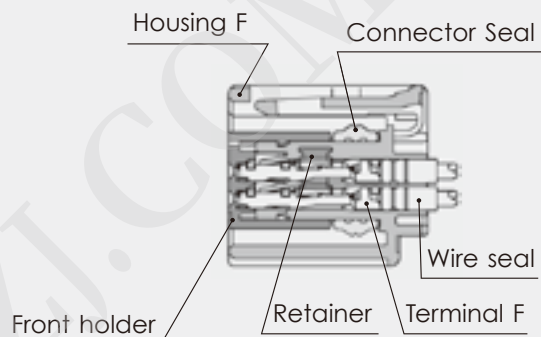

0.64mm (025)

B-03


TS SEALED SERIES

## Terminal (UNIT : mm)

端子 (毫米)

(S)

F (8240-0336)



Cable size (mm<sup>2</sup>)  
适用电线大小

0.13

Material

材 质

Heat-resistant  
copper alloy


Surface treatment  
表面处理

Tin-plated  
镀锡

(S)

Au

F (8240-0337)



Cable size (mm<sup>2</sup>)  
适用电线大小

0.13

Material

材 质

Heat-resistant  
copper alloy

Surface treatment  
表面处理

Gold-plated  
镀金

(M)

Cable size (mm<sup>2</sup>)  
适用电线大小

0.22~0.5


Material

材 质

Brass  
黄铜

Surface treatment  
表面处理

Tin-plated  
镀锡



(M)

Au

Cable size (mm<sup>2</sup>)  
适用电线大小

0.22~0.5


Material

材 质

Brass  
黄铜


Surface treatment  
表面处理

Gold-plated  
镀金



M (8100-3617)

F (8100-3455)



Cable size (mm<sup>2</sup>)  
适用电线大小

0.22~0.35

Material

材 质


Heat-resistant  
copper alloy

Surface treatment  
表面处理

Tin-plated  
镀锡

M (8100-3708)

F (8100-3456)



Cable size (mm<sup>2</sup>)  
适用电线大小

0.22~0.35

Material

材 质


Heat-resistant  
copper alloy

Surface treatment  
表面处理

Gold-plated  
镀金

(L)

F (8240-0287)



Cable size (mm<sup>2</sup>)  
适用电线大小

0.5

Material

材 质

Heat-resistant  
copper alloy


Surface treatment  
表面处理

Tin-plated  
镀锡

(L)

Au

F (8240-0288)



Cable size (mm<sup>2</sup>)  
适用电线大小

0.5

Material

材 质

Heat-resistant  
copper alloy

Surface treatment  
表面处理

Gold-plated  
镀金

# 0.64mm (025)

B-04

## Wire seals (UNIT : mm)


电线密封栓(毫米)

- The wire seals are common to M and F.  
\*A wireseal depends on a chosen cable.
- 电线密封栓为公端、母端共用。
- ※不同的电线使用不同的电线密封栓。

(SS)

(7165-1043)


|                                         |              |
|-----------------------------------------|--------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (CHFUS/0.22) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 0.95~1.05    |
| Material<br>材 质                         | Silicon<br>硅 |
| Color<br>颜 色                            | Green<br>绿   |



(3S)

(7165-1423)


|                                         |                   |
|-----------------------------------------|-------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (CHFUS/0.13)      |
| Cable overall diameter (mm)<br>带绝缘层外径   | 0.85~0.95         |
| Material<br>材 质                         | Silicon<br>硅      |
| Color<br>颜 色                            | Light Brown<br>浅棕 |



(S)

(7165-1312)


|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (CHFUS/0.35~0.5) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.1~1.4          |
| Material<br>材 质                         | Silicon<br>硅     |
| Color<br>颜 色                            | Violet<br>紫      |



(M)

(7165-1198)


|                                         |                                       |
|-----------------------------------------|---------------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AVSS/0.3) (AVSSH/0.3)<br>(AESSX/0.3) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.4~1.5                               |
| Material<br>材 质                         | Silicon<br>硅                          |
| Color<br>颜 色                            | Dark Yellow<br>深黄色                    |



(L)

(7165-1199)

|                                         |                                                   |
|-----------------------------------------|---------------------------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AVSS/0.5) (AVSSH/0.5)<br>(AVSSX/0.5) (AESSX/0.5) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.6~1.7                                           |
| Material<br>材 质                         | Silicon<br>硅                                      |
| Color<br>颜 色                            | Red Violet<br>紫红                                  |



# 0.64mm (025)


## Dummy plugs (UNIT : mm)

盲塞(毫米)

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

(7165-0797)

|                 |                  |
|-----------------|------------------|
| Material<br>材 质 | NBR              |
| Color<br>颜 色    | Light Gray<br>浅灰 |



0.64mm (025)

## Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No. B-03  
端子参照页


Ref: wire seal No. B-04  
电线密封栓参照页

Ref: Dummy plug No. B-04  
盲塞参照页


Material PBT  
材质

### 2way

Color Black  
颜色 黑



### M (6188-4797)




### F (6189-1161)

Color Black  
颜色 黑

### 2way


### F (6189-7020)



Color Black  
颜色 黑

### 3way

Color Black  
颜色 黑



### M (6188-4920)




### F (6189-1129)

Color Black  
颜色 黑

### 2way


### F (6189-7073)




Color Gray  
颜色 灰

### 4way

### F (6189-1231)




Color Gray  
颜色 灰



Color Gray  
颜色 灰

### 4way


### F (6189-7401)



Color Black  
颜色 黑

### 5way

### F (6189-1046)



Color Black  
颜色 黑


B-05

TS SEALED SERIES

6way


Color  
颜色

Natural  
自然色



M (6188-0706)

F (6189-1142)




Color  
颜色

Natural  
自然色

6way

F (6189-1083)




Color  
颜色

Black  
黑

6way

F (6189-7100)




Color  
颜色

Black  
黑

8way


Color  
颜色

Gray  
灰



M (6188-0779)

F (6189-1240)




Color  
颜色

Gray  
灰

10way


Color  
颜色

Black  
黑



M (6188-0696)

F (6189-1134)




Color  
颜色

Black  
黑

12way

F (6189-1128)




Color  
颜色

Black  
黑

13way


Color  
颜色

Gray  
灰



M (6188-4914)

F (6189-1092)




Color  
颜色

Gray  
灰





12way

F (6189-1133)



Color  
颜色

Gray  
灰

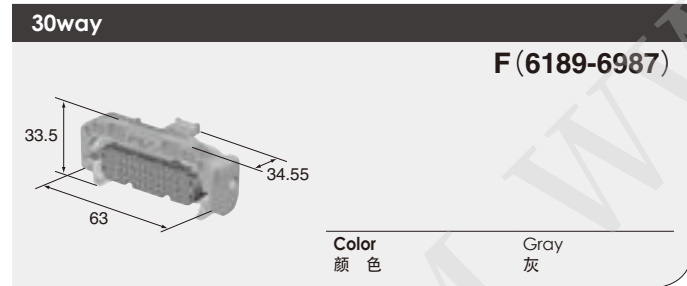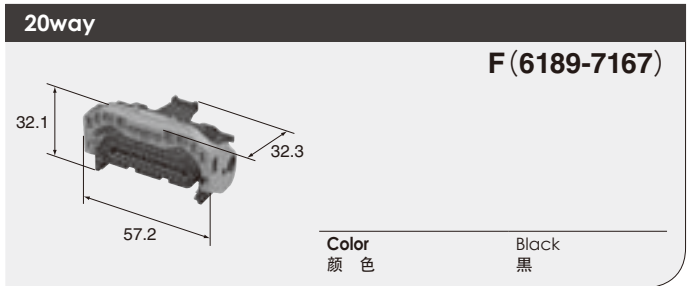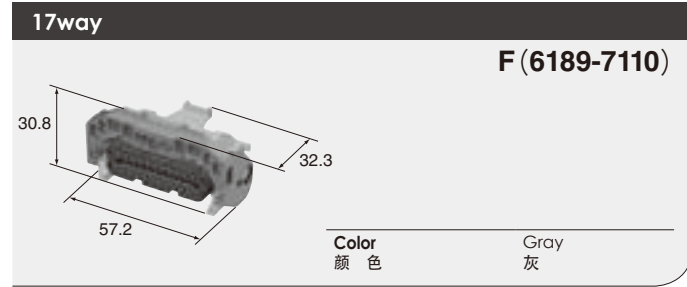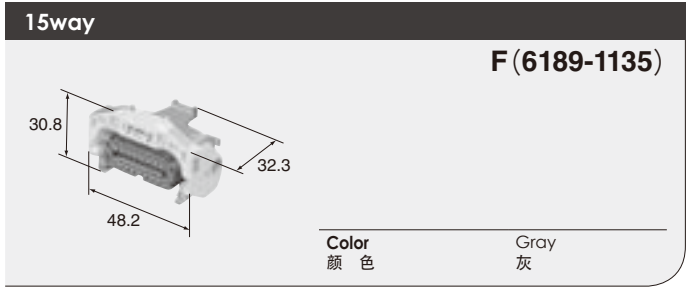


B-07

TS SEALED SERIES


# TS SEALED SERIES for STANDARD

## 0.64W (025W)


### Structure / 构造

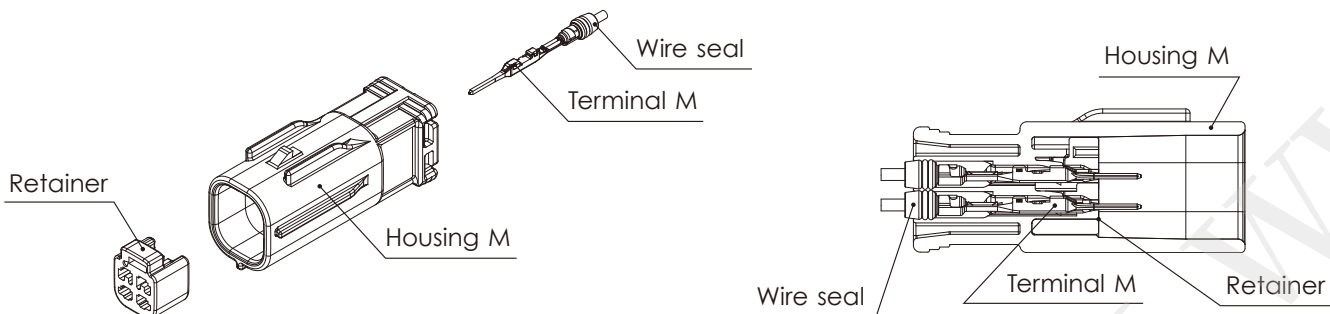

Connector M

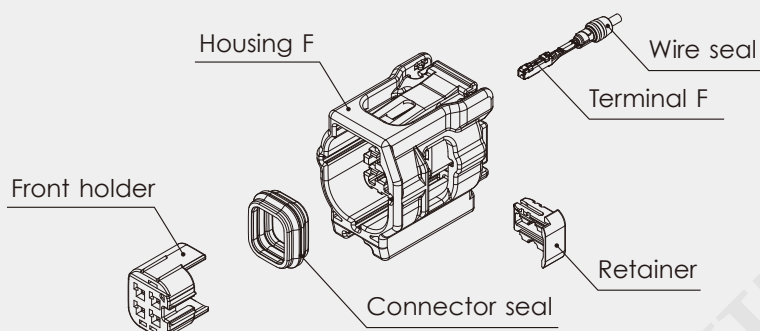

Connector F

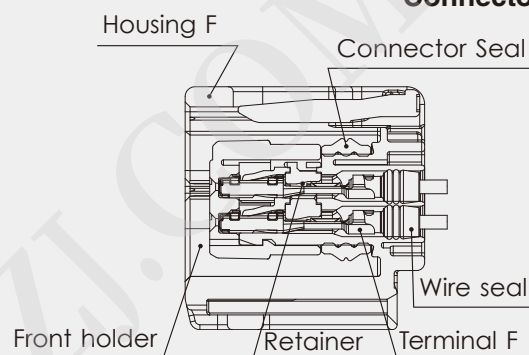

防水0.64W 型接插件与0.64型相比，因为扩大了端子孔腔间的距离，所以不具备互换性。

(为了区别于现有的防水0.64型，称呼为防水0.64W 型。)

Since 0.64W has wider terminal pitch, there is no compatibility between 0.64 and 0.64W.

(These connectors are called "0.64W series" to distinguish from existing 0.64 series.)

## 0.64W (025W)

### Terminal (UNIT : mm)

端子(毫米)

Ref; 0.64mm Terminal detail

0.64mm端子参照页

M(Sn) M(8100-3617) B-03 F(8100-3455) B-03

M(Au) M(8100-3708) B-03 F(8100-3456) B-03

(LL)

**Cable size (mm<sup>2</sup>)**  
适用电线大小


|           |           |
|-----------|-----------|
| FPW/0.6   | CIVUS/0.5 |
| AVSS/0.5  | AVSSX/0.5 |
| AVSSH/0.5 | IVSSH/0.5 |
| AESSX/0.5 | CHFUS/0.5 |
| HFSS/0.5  |           |

**Material**  
材质

|       |
|-------|
| Brass |
|-------|

**Surface treatment**  
表面处理

|                  |
|------------------|
| Tin-plated<br>镀锡 |
|------------------|



(LL)

Au

**Cable size (mm<sup>2</sup>)**  
适用电线大小

|           |           |
|-----------|-----------|
| CIVUS/0.5 | AVSS/0.5  |
| AVSSX/0.5 | AVSSH/0.5 |
| IVSSH/0.5 | AESSX/0.5 |
| CHFUS/0.5 | HFSS/0.5  |

**Material**  
材质

|             |
|-------------|
| Brass<br>黄铜 |
|-------------|


**Surface treatment**  
表面处理

|                   |
|-------------------|
| Gold-plated<br>镀金 |
|-------------------|



M (8230-5360)

F (8240-0500)



**Cable size (mm<sup>2</sup>)**  
适用电线大小


|           |           |
|-----------|-----------|
| FPW/0.6   | CIVUS/0.5 |
| AVSS/0.5  | AVSSX/0.5 |
| AVSSH/0.5 | IVSSH/0.5 |
| AESSX/0.5 | CHFUS/0.5 |
| HFSS/0.5  |           |

**Material**  
材质

|                                      |
|--------------------------------------|
| Heat resistant copper-alloy<br>耐热铜合金 |
|--------------------------------------|


**Surface treatment**  
表面处理

|                  |
|------------------|
| Tin-plated<br>镀锡 |
|------------------|



M (8230-5361)

F (8240-0501)



**Cable size (mm<sup>2</sup>)**  
适用电线大小


|           |           |
|-----------|-----------|
| CIVUS/0.5 | AVSS/0.5  |
| AVSSX/0.5 | AVSSH/0.5 |
| IVSSH/0.5 | AESSX/0.5 |
| CHFUS/0.5 | HFSS/0.5  |

**Material**  
材质

|                                      |
|--------------------------------------|
| Heat resistant copper-alloy<br>耐热铜合金 |
|--------------------------------------|

**Surface treatment**  
表面处理

|                   |
|-------------------|
| Gold-plated<br>镀金 |
|-------------------|



0.64W (025W)

## Wire seals (UNIT : mm)

电线密封栓 (毫米)

The wire seals are common to M and F.

电线密封栓为公端、母端共用。

(S)

(7165-1608)

**Cable size (mm<sup>2</sup>)**  
适用电线大小

|                |
|----------------|
| CIVUS/0.35~0.5 |
| CHFUS/0.35~0.5 |

**Cable overall diameter (mm)**  
带绝缘层外径


|         |
|---------|
| 1.1~1.4 |
|---------|

**Material**  
材质

|              |
|--------------|
| Silicon<br>硅 |
|--------------|

**Color**  
颜色

|                 |
|-----------------|
| Dark Gray<br>深灰 |
|-----------------|



(M)

(7165-1607)

**Cable size (mm<sup>2</sup>)**  
适用电线大小

|            |           |
|------------|-----------|
| AVSS/0.3   | AVSSH/0.3 |
| IVSSH/0.35 | HFSS/0.35 |

**Cable overall diameter (mm)**  
带绝缘层外径


|         |
|---------|
| 1.3~1.5 |
|---------|

**Material**  
材质

|              |
|--------------|
| Silicon<br>硅 |
|--------------|

**Color**  
颜色

|                  |
|------------------|
| Dark Green<br>墨绿 |
|------------------|



(L)

(7165-1606)

**Cable size (mm<sup>2</sup>)**  
适用电线大小

|           |           |
|-----------|-----------|
| FPW/0.6   | AVSS/0.5  |
| AVSSX/0.5 | AVSSH/0.5 |
| IVSSH/0.5 | HFSS/0.5  |

**Cable overall diameter (mm)**  
带绝缘层外径


|           |
|-----------|
| 1.51~1.73 |
|-----------|

**Material**  
材质

|              |
|--------------|
| Silicon<br>硅 |
|--------------|

**Color**  
颜色

|                  |
|------------------|
| Dark Brown<br>深棕 |
|------------------|



0.64W (025W)


Dummy plugs (UNIT : mm)

盲塞(毫米)

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

(7165-1605)

|                 |                   |
|-----------------|-------------------|
| Material<br>材 质 | Silicon<br>硅      |
| Color<br>颜 色    | Indian Red<br>印度红 |



0.64W (025W)


Housing (UNIT : mm)

接插件护套(毫米)

|                                 |      |
|---------------------------------|------|
| Ref: Terminal part No.<br>端子参照页 | B-08 |
| Ref: wire seal No.<br>电线密封栓参照页  | B-09 |
| Ref: Dummy plug No.<br>盲塞参照页    | B-10 |
| Material<br>材 质                 | PA6T |


4way

|              |            |
|--------------|------------|
| Color<br>颜 色 | Black<br>黑 |
|--------------|------------|



M (6188-5516)

F (6189-7449)



|              |            |
|--------------|------------|
| Color<br>颜 色 | Black<br>黑 |
|--------------|------------|

TS SEALED SERIES  
for HYBRID

0.64W, 2.3mm, 4.8mm  
(025W, 090, 187)







Housing (UNIT : mm)

接插件护套(毫米)

|                                 |                               |                               |
|---------------------------------|-------------------------------|-------------------------------|
| Ref: Terminal part No.<br>端子参照页 | [0.64W]<br>[2.3mm]<br>[4.8mm] | B-08<br>B-13(for P06)<br>B-19 |
| Ref: wire seal No.<br>电线密封栓参照页  | [0.64W]<br>[2.3mm]<br>[4.8mm] | B-09<br>B-14(for P06)<br>B-20 |
| Ref: Dummy plug No.<br>盲塞参照页    | [0.64W]<br>[2.3mm]<br>[4.8mm] | B-10<br>B-15(for P06)<br>B-21 |

|                 |     |
|-----------------|-----|
| Material<br>材 质 | PBT |
|-----------------|-----|

No. of way/ ( ) corresponds to 0.64W, 2.3mm, 4.8mm in order from left to right.  
极数/ ( ) 内显示 : 从左向右为0.64mm 极数、2.3mm 极数、4.8mm 极数

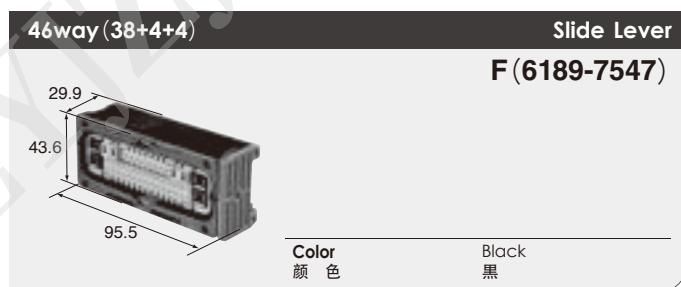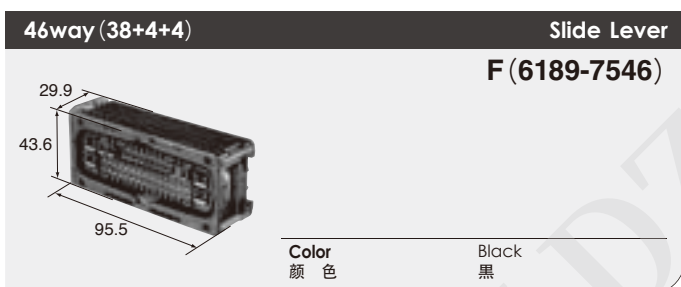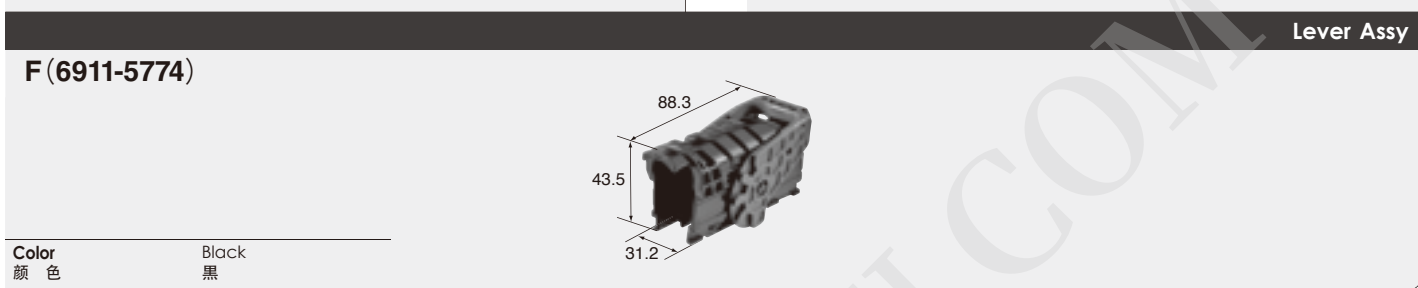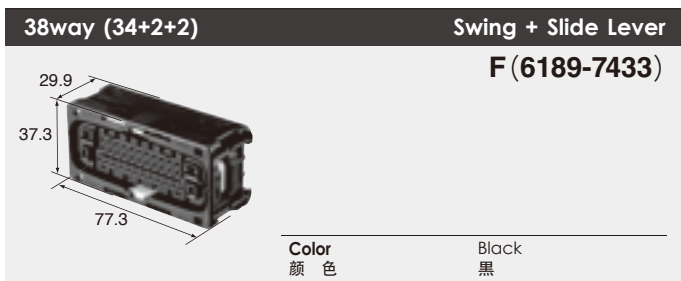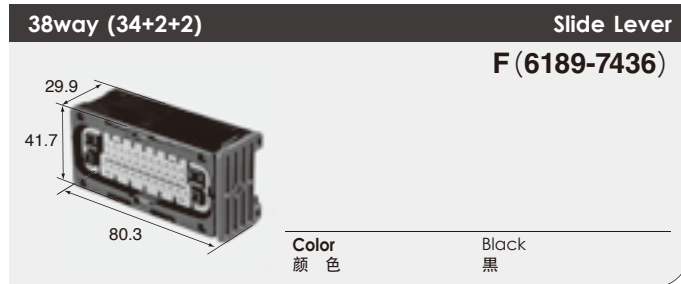
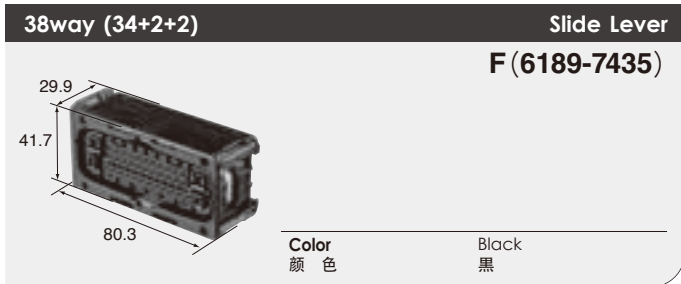


# TS SEALED SERIES for STANDARD


## 2.3mm (090)

Structure / 构造


B-12

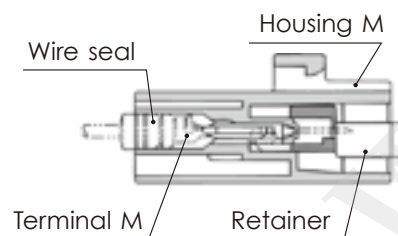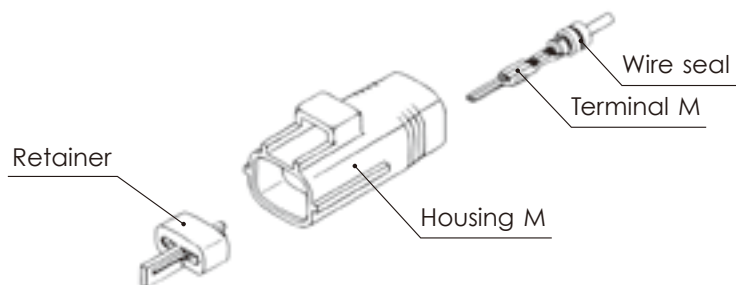

Connector M

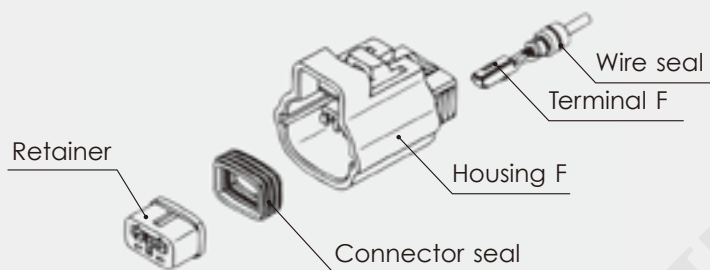

Connector F

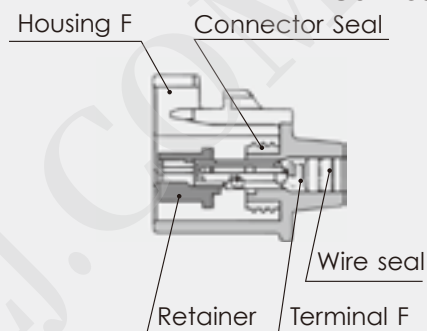



2.3mm (090)

Terminal (UNIT : mm)

端子(毫米)

**(S)**



|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5          |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8100-0457)****F (8100-0460)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(S)****Au**



|                                              |                   |
|----------------------------------------------|-------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5           |
| <b>Material</b><br>材 质                       | Brass<br>黄铜       |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金 |

**M (8100-1340)****F (8100-1344)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**(M)**



|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.5~1.25         |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8100-0458)****F (8100-0461)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.5~1.25                       |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(M)****Au**



|                                              |                   |
|----------------------------------------------|-------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.5~1.25          |
| <b>Material</b><br>材 质                       | Brass<br>黄铜       |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金 |

**M (8100-1007)****F (8100-0594)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.5~1.25                       |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**(L)**



|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0              |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8100-0459)****F (8100-0462)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0                            |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(L)****Au**

|                                              |                   |
|----------------------------------------------|-------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0               |
| <b>Material</b><br>材 质                       | Brass<br>黄铜       |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金 |

**M (8100-1008)****F (8100-0817)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0                            |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**B-13**

TS SEALED SERIES

## 2.3mm (090)

### Wire seals (UNIT : mm)

电线密封栓(毫米)

The wire seals are common to M and F.

- P5 : For 5mm pitch housing/Please inquire us for the details.
- P6 : For 6mm pitch housing

电线密封栓为公端、母端共用。


- P5 : 5mm 间距用/请另行咨询。
- P6 : 6mm 间距用

(SS)

(P6)

(7165-0842)

|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (CHFUS/0.35~0.5) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.1~1.4          |
| Material<br>材质                          | Silicon<br>硅     |
| Color<br>颜色                             | Blue<br>蓝        |




(S)

(P6)

(7165-0349)

|                                         |                                                                                     |
|-----------------------------------------|-------------------------------------------------------------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AVX·AEX/0.3) (AVS/0.3) (AVSS/0.3~0.85)<br>(AVSSX·AESSX/0.3~0.75) (CAVUS/0.85~1.25) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.4~2.0                                                                             |
| Material<br>材质                          | Silicon<br>硅                                                                        |
| Color<br>颜色                             | Dark Brown<br>深棕                                                                    |




(S)

(P5)

(7165-0342)

|                                         |                                                                                     |
|-----------------------------------------|-------------------------------------------------------------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AVX·AEX/0.3) (AVS/0.3) (AVSS/0.3~0.85)<br>(AVSSX·AESSX/0.3~0.75) (CAVUS/0.85~1.25) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.4~2.0                                                                             |
| Material<br>材质                          | Silicon<br>硅                                                                        |
| Color<br>颜色                             | Brown<br>棕                                                                          |




(M)

(P6)

(7165-0395)

|                                         |                                                                              |
|-----------------------------------------|------------------------------------------------------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AV/0.5) (AVX·AEX/0.5~0.75) (AVS/0.5~0.85)<br>(AVSS/1.25) (AVSSX·AESSX/1.25) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 2.0~2.5                                                                      |
| Material<br>材质                          | Silicon<br>硅                                                                 |
| Color<br>颜色                             | Dark Green<br>墨绿                                                             |




(M)

(P5)

(7165-0343)

|                                         |                                                                              |
|-----------------------------------------|------------------------------------------------------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AV/0.5) (AVX·AEX/0.5~0.75) (AVS/0.5~0.85)<br>(AVSS/1.25) (AVSSX·AESSX/1.25) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 2.0~2.5                                                                      |
| Material<br>材质                          | Silicon<br>硅                                                                 |
| Color<br>颜色                             | Black<br>黑                                                                   |




(L)

(P6)

(7165-0351)

|                                         |                                                                     |
|-----------------------------------------|---------------------------------------------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AV/1.25) (AVX·AEX/1.25) (AVS/1.25)<br>(AVSS/2.0) (AVSSX·AESSX/2.0) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 2.5~2.9                                                             |
| Material<br>材质                          | Silicon<br>硅                                                        |
| Color<br>颜色                             | Dark Gray<br>深灰                                                     |




(L)

(P5)

(7165-0344)

|                                         |                                                                     |
|-----------------------------------------|---------------------------------------------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AV/1.25) (AVX·AEX/1.25) (AVS/1.25)<br>(AVSS/2.0) (AVSSX·AESSX/2.0) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 2.5~2.9                                                             |
| Material<br>材质                          | Silicon<br>硅                                                        |
| Color<br>颜色                             | Dark Blue<br>藏青                                                     |



## 2.3mm (090)

### Dummy plugs (UNIT : mm)

盲塞(毫米)

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- P5 : For 5mm pitch housing/Please inquire us for the details.
- P6 : For 6mm pitch housing
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。
- P5 : 5mm 间距用/请另行咨询。
- P6 : 6mm 间距用

## 2.3mm (090)

### Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No. B-13  
端子参照页


Ref: wire seal No. B-14  
电线密封栓参照页

Ref: Dummy plug No. B-15  
盲塞参照页

Material PBT  
材 质


#### 2way

Color Gray  
颜 色



M (6188-0108)


F (6189-0199)



Color Gray  
颜 色


#### 2way

Color Gray  
颜 色



M (6188-0047)


F (6189-0100)



Color Gray  
颜 色


#### 2way

Color Gray  
颜 色




M (6188-0266)

F (6189-0249)




Color Gray  
颜 色



Material NBR  
材 质  
Color Black  
颜 色

(P5)  
(7161-9787)



Material NBR  
材 质  
Color Brown  
颜 色

(P6)


(7160-9465)

B-15

TS SEALED SERIES


## 2way

Color 颜色  
Gray 灰



M (6188-0229)


F (6189-0388)



Color 颜色  
Gray 灰


## 2way

Color 颜色  
Natural 自然色



M (6188-0624)

F (6189-0264)




Color 颜色  
Gray 灰

## 2way

P5

F (6189-0566)



Ref: Wire seal No.  
电线密封栓参照页 B-10 (For P5)


Ref: Dummy plug No.  
盲塞参照页 B-11 (For P5)

Color 颜色  
Gray 灰

## 2way

P5

F (6189-0573)



Ref: Wire seal No.  
电线密封栓参照页 B-10 (For P5)


Ref: Dummy plug No.  
盲塞参照页 B-11 (For P5)

Color 颜色  
Gray 灰

## 2way

P5

F (6189-0611)




Ref: Wire seal No.  
电线密封栓参照页 B-10 (For P5)

Ref: Dummy plug No.  
盲塞参照页 B-11 (For P5)

Color 颜色  
Gray 灰


## 2way

Color 颜色  
Gray 灰



M (6188-0470)


F (6189-0682)



Color 颜色  
Gray 灰


## 3way (T Type)

Color 颜色  
Gray 灰



M (6188-0099)

F (6189-0179)




Color 颜色  
Gray 灰

### 3way (E Type)


Color  
颜色

Gray  
灰



M (6188-0282)

F (6189-0443)




Color  
颜色

Gray  
灰

### 4way

F (6189-0694)




Color  
颜色

Black  
黑

### 4way

F (6189-7398)



Material  
材质

PA6T


Color  
颜色

Black  
黑

### 4way


Color  
颜色

Black  
黑



M (6188-0517)

F (6189-0629)




Color  
颜色

Gray  
灰

### 4way


Color  
颜色

Gray  
灰



M (6188-0066)

F (6189-0126)




Color  
颜色

Gray  
灰

### 4way


Color  
颜色

Gray  
灰



M (6188-0141)

F (6189-0381)




Color  
颜色

Gray  
灰

### 4way


Color  
颜色

Gray  
灰



M (6188-0217)

F (6189-0372)



Color  
颜色


Gray  
灰

Plate thickness range for clamp:  
t=0.7~2.2

#### 4way


Color  
颜色

Gray  
灰



M (6188-0472)

F (6189-0685)




Color  
颜色

Gray  
灰

#### 5way


Color  
颜色

Gray  
灰



M (6188-0327)

F (6189-0504)




Color  
颜色

Gray  
灰

#### 6way


Color  
颜色

Gray  
灰



M (6188-0173)

F (6189-0319)




Color  
颜色

Gray  
灰

#### 6way


Color  
颜色

Gray  
灰



M (6188-0175)

F (6189-0323)



Color  
颜色

Gray  
灰

#### 6way

Color  
颜色

Gray  
灰





Plate thickness range for clamp:  
 $t=0.7\sim 2.2$

M (6188-0209)

F (6189-0368)




Color  
颜色

Gray  
灰

#### 7way


Color  
颜色

Gray  
灰



M (6188-0067)

F (6189-0127)



Color  
颜色

Gray  
灰



# TS SEALED SERIES for STANDARD

## 4.8mm (187)


Structure / 构造

B-19


TS SEALED SERIES

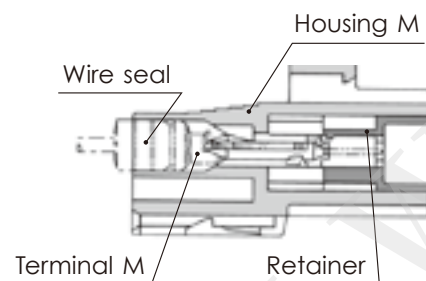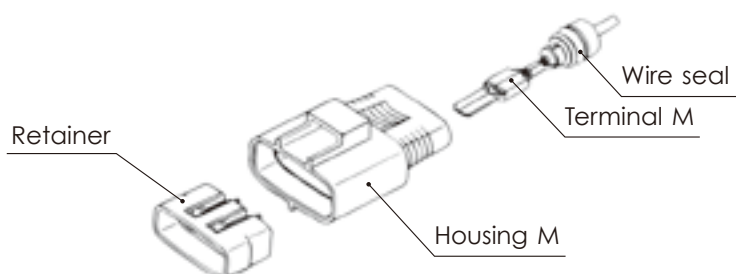

Connector M

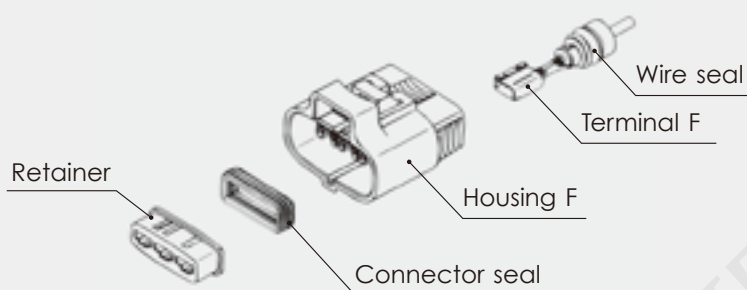


Connector F

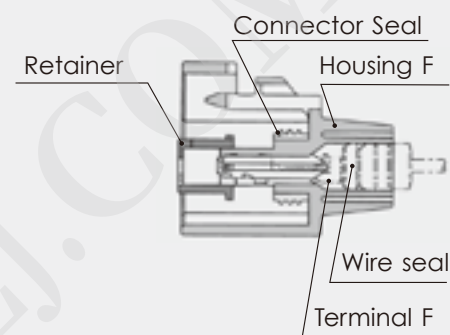

4.8mm (187)


(S)

|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.3~0.5          |
| Material<br>材质                          | Brass<br>黄铜      |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡 |



M (8100-0463)

F (8100-0466)




|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.3~0.5          |
| Material<br>材质                          | Brass<br>黄铜      |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡 |

Terminal (UNIT : mm)



端子(毫米)

**(M)**


|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.5~1.25         |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**(L)**

|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0~3.0          |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8100-0464)****F (8100-0467)**

|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.5~1.25         |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8100-0465)****F (8100-0468)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0~3.0                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**4.8mm (187)**

## Wire seals (UNIT : mm)


电线密封栓(毫米)

The wire seals are common to M and F.


电线密封栓为公端、母端共用。

**(S)****(7165-0346)**


|                                              |                                                                       |
|----------------------------------------------|-----------------------------------------------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | (AVS/0.3) (AVSS/0.3~0.85)<br>(AVSSX·AESSX/0.5~0.75) (CAVUS/0.85~1.25) |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.4~2.0                                                               |
| <b>Material</b><br>材 质                       | Silicon<br>硅                                                          |
| <b>Color</b><br>颜 色                          | Dark Brown<br>深棕                                                      |

**(M)****(7165-0347)**

|                                              |                                                                                           |
|----------------------------------------------|-------------------------------------------------------------------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | (AV/0.5~1.25) (AVX·AEX/0.5~1.25) (AVS/0.5~1.25)<br>(AVSS/1.25~2.0) (AVSSX·AESSX/1.25~2.0) |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 2.0~2.9                                                                                   |
| <b>Material</b><br>材 质                       | Silicon<br>硅                                                                              |
| <b>Color</b><br>颜 色                          | Dark Green<br>墨绿                                                                          |

**(L)****(7165-0348)**

|                                              |                                  |
|----------------------------------------------|----------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | (AV/2.0) (AVX·AEX/2.0) (AVS/2.0) |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 2.9~3.5                          |
| <b>Material</b><br>材 质                       | Silicon<br>硅                     |
| <b>Color</b><br>颜 色                          | Dark Gray<br>深灰                  |

**(LL)****(7165-0356)**

|                                              |                                  |
|----------------------------------------------|----------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | (AV/3.0) (AVX·AEX/3.0) (AVS/3.0) |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 3.5~4.1                          |
| <b>Material</b><br>材 质                       | Silicon<br>硅                     |
| <b>Color</b><br>颜 色                          | Dark Blue<br>藏青                  |



4.8mm (187)

**Dummy plugs** (UNIT : mm)

盲塞 (毫米)

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

(7165-0145)



Material

NBR

材质

颜色

Gray

灰

4.8mm (187)

**Housing** (UNIT : mm)

接插件护套 (毫米)

Ref: Terminal part No.

端子参照页

B-19

Ref: wire seal No.

电线密封栓参照页

B-20

Ref: Dummy plug No.

盲塞参照页

B-21

Material

材质

PBT


1way

Color

颜色


Gray

灰



M (6188-0083)

F (6189-0145)



Color


颜色

Gray

灰

1way

F (6189-0413)



Color

颜色

Black

黑


2way

Color

颜色


Gray

灰



M (6188-0259)

F (6189-0425)



Color

颜色

Gray


灰



3way


Color  
颜色

Gray  
灰



M (6188-0129)

F (6189-0165)



Color  
颜色

Gray  
灰


# TS SEALED SERIES for STANDARD

## 8.0mm (312)

Structure / 构造

B-23

TS SEALED SERIES

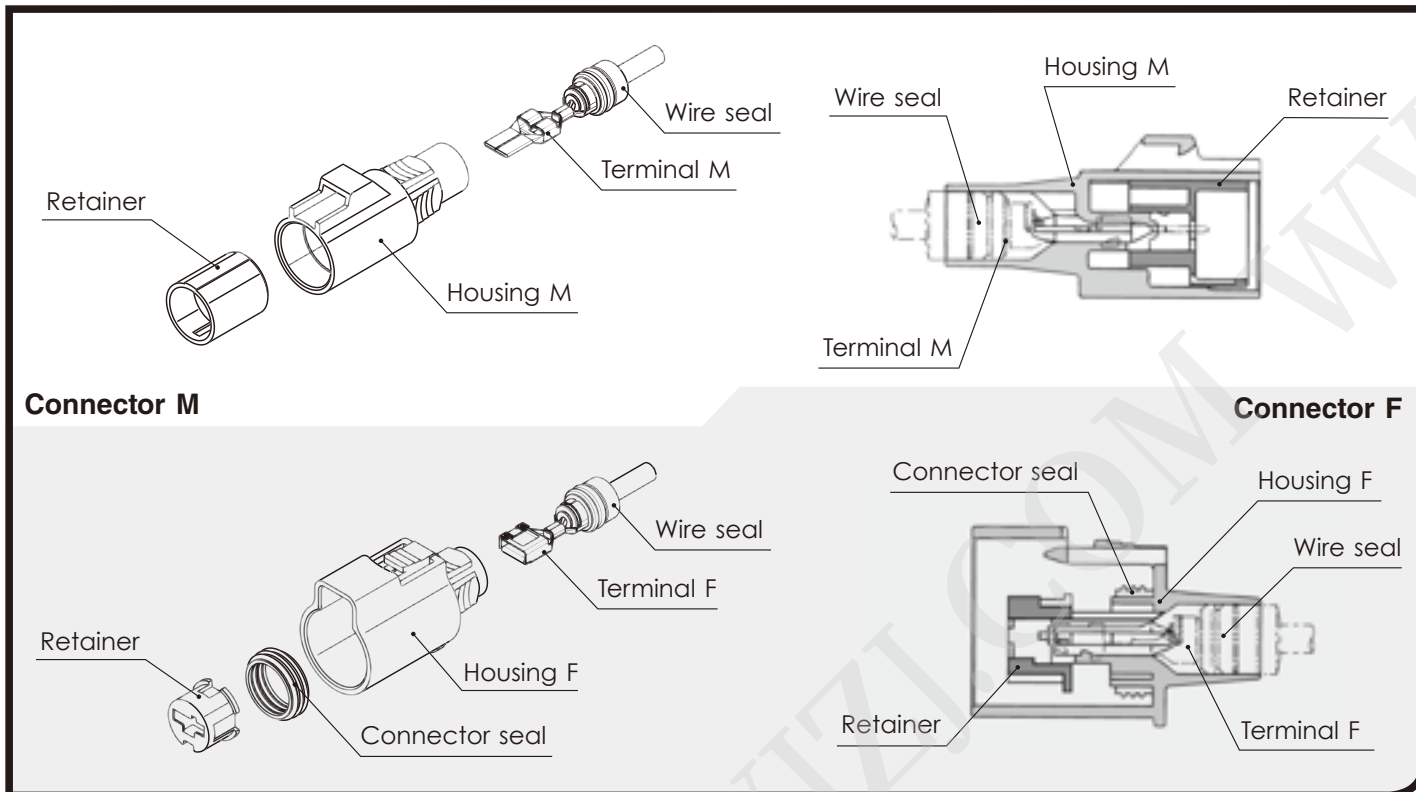

8.0mm (312)


(S)

Cable size (mm<sup>2</sup>)  
适用电线大小 0.5~1.25

Cable overall diameter (mm)  
带绝缘层外径 2.0~2.7


Material  
材质 Brass  
黄铜

Surface treatment  
表面处理 Tin-plated  
镀锡



M (8100-0506)

F (8100-0451)



Cable size (mm<sup>2</sup>)  
适用电线大小 0.5~1.25

Cable overall diameter (mm)  
带绝缘层外径 2.0~2.7

Material  
材质 Brass  
黄铜


Surface treatment  
表面处理 Tin-plated  
镀锡

Terminal (UNIT : mm)



端子(毫米)

**(M)**Cable size (mm<sup>2</sup>) 2.0~3.0


适用电线大小

Cable overall diameter (mm) 2.6~4.1  
带绝缘层外径Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡**(L)**Cable size (mm<sup>2</sup>) 5.0~8.0

适用电线大小

Cable overall diameter (mm) 4.4~5.8  
带绝缘层外径Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡**M (8100-0507)****F (8100-0452)**Cable size (mm<sup>2</sup>) 2.0~3.0

适用电线大小

Cable overall diameter (mm) 2.6~4.1  
带绝缘层外径Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡**M (8100-0508)****F (8100-2980)**Cable size (mm<sup>2</sup>) 5.0~8.0

适用电线大小

Cable overall diameter (mm) 4.4~5.8  
带绝缘层外径Material Heat-resistant  
铜合金Surface treatment Tin-plated  
表面处理 镀锡**8.0mm (312)**

## Wire seals (UNIT : mm)


电线密封栓(毫米)

The wire seals are common to M and F.


电线密封栓为公端、母端共用。

**(SS)****(7165-0683)**Cable size (mm<sup>2</sup>) (AVS·AVX/0.5~1.25)


适用电线大小

Cable overall diameter (mm) Over 2.0 mm less than 2.9 mm  
带绝缘层外径 超过2.0mm在2.9mm以下Material Silicon  
材质 硅Color Dark Brown  
颜色 深棕**(S)****(7165-0400)**Cable size (mm<sup>2</sup>) (AV/3.0) (AVX·AEX/3.0) (AVS/3.0)


适用电线大小

Cable overall diameter (mm) 3.6~4.1  
带绝缘层外径Material Silicon  
材质 硅Color Dark Gray  
颜色 深灰**(M)****(7165-0392)**Cable size (mm<sup>2</sup>) (AV/5.0) (AVX·AEX/5.0) (AVS/5.0)

适用电线大小

Cable overall diameter (mm) 4.4~4.9  
带绝缘层外径Material Silicon  
材质 硅Color Dark Blue  
颜色 藏青**(L)****(7165-0393)**Cable size (mm<sup>2</sup>) (AV/8.0) (AVX·AEX/8.0) (AVS/8.0)

适用电线大小

Cable overall diameter (mm) 5.3~5.8  
带绝缘层外径Material Silicon  
材质 硅Color Black  
颜色 黑

# 8.0mm (312)

## Dummy plugs (UNIT : mm)

盲塞 (毫米)

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

# 8.0mm (312)

## Housing (UNIT : mm)

接插件护套 (毫米)

Ref: Terminal part No. B-23  
端子参照页


Ref: wire seal No. B-24  
电线密封栓参照页

Ref: Dummy plug No. B-25  
盲塞参照页

Material PBT  
材 质


2way

Color Gray  
颜 色



M (6188-0096)


F (6189-0172)



Color Gray  
颜 色


1way

Color Gray  
颜 色



M (6188-0049)


F (6189-0101)



Color Gray  
颜 色

2way


F (6189-0856)



Color Gray  
颜 色

2way

F (6189-6953)



Color Gray  
颜 色


B-25

TS SEALED SERIES

## 2way


Color  
颜色

Gray  
灰



M (6188-5295)

F (6189-7256)



Color  
颜色

Gray  
灰

# TS SEALED SERIES for HYBRID

0.64mm, 2.3mm  
(025, 090)

## Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No. [0.64mm] B-03  
端子参照页 [2.3mm] B-13

Ref: wire seal No. [0.64mm] B-04  
电线密封栓参照页 [2.3mm] B-14


Ref: Dummy plug No. [0.64mm] B-04  
盲塞参照页 [2.3mm] B-15

Material PBT  
材质

No. of way/ ( ) corresponds to 0.64mm, 2.3mm, in order from left to right.  
极数/ ( ) 内显示: 从左向右为0.64mm 极数、2.3mm 极数

## 10way (6+4)

F (6189-7691)




Color  
颜色

Black  
黑

## 13way (10+3)

F (6189-7077)




Color  
颜色

Gray  
灰

## 26way (23+3)

F (6189-6934)



Color  
颜色

Black  
黑

0.64mm, 4.8mm  
(025, 187)

## Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No. [0.64mm] B-03  
端子参照页 [4.8mm] B-19

Ref: wire seal No. [0.64mm] B-04  
电线密封栓参照页 [4.8mm] B-20


Ref: Dummy plug No. [0.64mm] B-04  
盲塞参照页 [4.8mm] B-21

Material PBT  
材 质

No. of way ( ) corresponds to 0.64mm, 4.8mm, in order from left to right.  
极数 / ( ) 内显示 : 从左向右为0.64mm 极数、4.8mm 极数


### 4way (2+2)

Color Black  
颜 色 黑



### M (6188-5103)


### F (6189-1048)



Color Black  
颜 色 黑

### 24way (22+2)


### F (6189-7426)



Color Gray  
颜 色 灰

### 34way (30+4)


### F (6189-6978)



Color Black  
颜 色 黑

### 34way (30+4)


### F (6189-6979)



Color Gray  
颜 色 灰

### 34way (30+4)


### F (6189-6980)



Color Black  
颜 色 黑

### 34way (30+4)


### F (6189-6981)



Color Gray  
颜 色 灰

### 40way (36+4)


### F (6189-1160)



Color Gray  
颜 色 灰

### 46way (42+4)


### F (6189-1136)



Color Black  
颜 色 黑

### 46way (42+4)

### F (6189-6894)



Color Black  
颜 色 黑

B-27

TS SEALED SERIES

0.64mm, 2.3mm, 4.8mm  
(025, 090, 187)

Housing (UNIT : mm)

接插件护套(毫米)


|                                 |          |      |
|---------------------------------|----------|------|
| Ref: Terminal part No.<br>端子参照页 | [0.64mm] | B-03 |
|                                 | [2.3mm]  | B-13 |
|                                 | [4.8mm]  | B-19 |
| Ref: wire seal No.<br>电线密封栓参照页  | [0.64mm] | B-04 |
|                                 | [2.3mm]  | B-14 |
|                                 | [4.8mm]  | B-20 |
| Ref: Dummy plug No.<br>盲塞参照页    | [0.64mm] | B-04 |
|                                 | [2.3mm]  | B-15 |
|                                 | [4.8mm]  | B-21 |

Material  
材 质 PBT

No. of way/ ( ) corresponds to 0.64mm, 2.3mm, 4.8mm in order from left to right.  
极数/ ( ) 内显示 : 从左向右为0.64mm 极数、 2.3mm 极数、 4.8mm 极数

42way (36+2+4)


F (6189-7094)



Color  
颜 色 Black  
黑

52way (42+4+6)


F (6189-7809)



Color  
颜 色 Black  
黑

Lever Assy

(6911-5948)



Color  
颜 色 Black  
黑

## 2.3mm, 4.8mm (090, 187)

### Housing (UNIT : mm)

接插件护套(毫米)


|                                        |                                       |
|----------------------------------------|---------------------------------------|
| <b>Ref: Terminal part No.</b><br>端子参照页 | [2.3mm] B-13<br>[4.8mm] B-19          |
| <b>Ref: wire seal No.</b><br>电线密封栓参照页  | [2.3mm] B-14 (For P6)<br>[4.8mm] B-20 |
| <b>Ref: Dummy plug No.</b><br>盲塞参照页    | [2.3mm] B-15 (For P6)<br>[4.8mm] B-21 |

**Material**  
材 质 PBT

No. of way/ ( ) corresponds to 2.3mm, 4.8mm in order from left to right.  
极数/ ( ) 内显示: 从左向右为2.3mm 极数、4.8mm 极数


### 4way (2+2)

**Color**  
颜 色 Gray  
灰



### M (6188-0415)


### F (6189-0144)



**Color**  
颜 色 Gray  
灰


### 5way (3+2)

**Color**  
颜 色 Gray  
灰



### M (6188-0091)


### F (6189-0166)



**Color**  
颜 色 Gray  
灰


### 5way (3+2)

**Color**  
颜 色 Gray  
灰



### M (6188-0101)

### F (6189-0181)



**Color**  
颜 色 Gray  
灰


### 6way (4+2)

**Color**  
颜 色 Gray  
灰



### M (6188-0187)


### F (6189-0143)



**Color**  
颜 色 Gray  
灰


### 11way (8+3)

**Color**  
颜 色 Gray  
灰



### M (6188-0221)

### F (6189-0376)



**Color**  
颜 色 Gray  
灰

4.8mm, 8.0mm  
(187, 312)

Housing (UNIT : mm)


接插件护套(毫米)

|                        |              |
|------------------------|--------------|
| Ref: Terminal part No. | [4.8mm] B-19 |
| 端子参照页                  | [8.0mm] B-23 |
| Ref: wire seal No.     | [4.8mm] B-20 |
| 电线密封栓参照页               | [8.0mm] B-24 |
| Ref: Dummy plug No.    | [4.8mm] B-21 |
| 盲塞参照页                  | [8.0mm] B-25 |
| Material               | PBT          |
| 材 质                    |              |

No. of way/ ( ) corresponds to 4.8mm, 8.0mm in order from left to right.  
极数 / ( ) 内显示 : 从左向右为4.8mm 极数、8.0mm 极数

3way (1+2)

F (6189-7156)



|       |       |
|-------|-------|
| Color | Black |
| 颜 色   | 黑     |

# HE SERIES



## Features

The HE connector series is the highly reliable improved version of the conventional HD series, with a mechanism that minimizes the possibility of terminal back out and semi-engagement of connectors.

This series consists of 0.64mm, 1.0mm, 2.3mm, 4.8mm and 9.5mm types (0.64mm, 1.0mm, 2.3mm, 4.8mm and 8.0mm types for the hybrid model) classified according to terminal size, supporting use in a variety of control circuits and low power circuits.

- An incompletely inserted terminal is automatically adjusted to the correct position by setting a retainer.
- Retainers are pre-mounted on the connector housing, and are structured to enable setting by the same simple operation regardless of the number of ways, improving operability.
- An extra clip can be attached to the connector housing to secure it to the car body, and multiple connectors can be joined.
- PCB models are also available for connection to printed circuit boards.
- RoHS/ELV Compliant

## 特点

HE 系列是将以往的 HD 系列改良后，提高了可靠性的接插件。

具有不易发生端子脱落及接插件半嵌合的构造。

按照端子尺寸划分为 0.64mm · 1.0mm · 2.3mm · 4.8mm · 9.5mm (混合型为 0.64mm · 1.0mm · 2.3mm · 4.8mm · 8.0mm)，可以应用于各种控制回路与低功率。


- 未完全插入的端子能够通过安装锁片插入到正确的位置。
- 锁片预先组装在接插件护套上，无论多少极数都能通过简单操作组合，有助于提高操作效率。
- 在接插件护套上可安装卡钉（卡子）用以固定在车体上，并且可以将各个接插件相互连接。
- 我们还设计了能适用于印刷电路板的 PCB 接插件。
- 可对应欧盟 RoHS 和 ELV 指令

# HE SERIES for STANDARD

0.64mm (025)

Structure / 构造

C-02

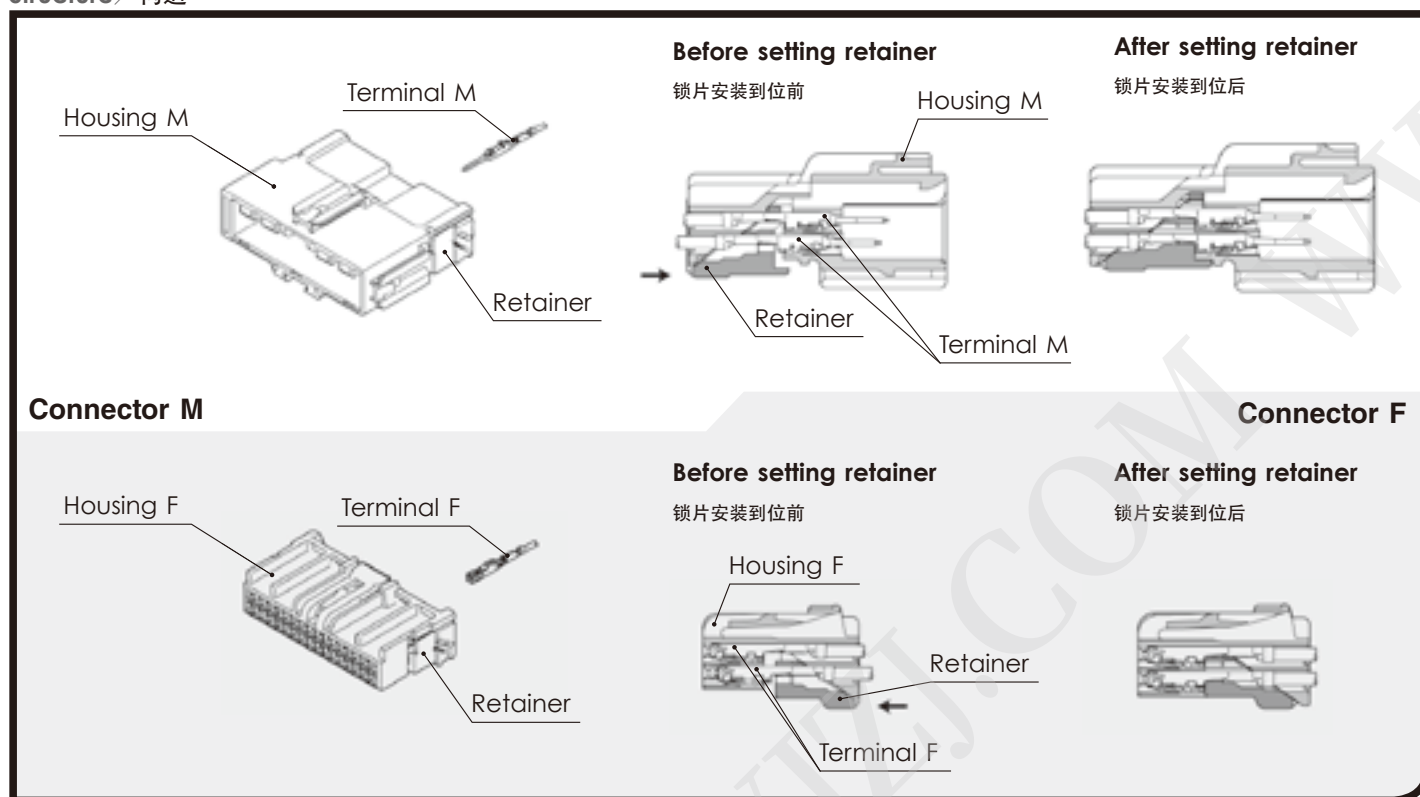

0.64mm (025)

**Terminal** (UNIT : mm)

端子(毫米)

**(S)**Cable size (mm<sup>2</sup>) 0.22~0.35

适用电线大小

Cable overall diameter (mm) 0.95~1.4


带绝缘层外径

Material Brass

材质 黄铜

Surface treatment Tin-plated

表面处理 镀锡

**(M)**Cable size (mm<sup>2</sup>) 0.5~0.75

适用电线大小

Cable overall diameter (mm) 1.25~1.6



带绝缘层外径

Material Brass

材质 黄铜

Surface treatment Tin-plated

表面处理 镀锡

**M (8100-4028)****F (8100-4029)**Cable size (mm<sup>2</sup>) 0.22~0.35

适用电线大小

Cable overall diameter (mm) 0.95~1.4


带绝缘层外径

Material Heat-resistant

材质 耐热铜合金

Surface treatment Tin-plated

表面处理 镀锡

**M (8100-4027)****F (8100-4030)**Cable size (mm<sup>2</sup>) 0.5~0.75

适用电线大小

Cable overall diameter (mm) 1.25~1.6

带绝缘层外径

Material Heat-resistant

材质 耐热铜合金

Surface treatment Tin-plated

表面处理 镀锡

**0.64mm (025)****Housing** (UNIT : mm)

Ref: Terminal part No.

端子参照页

C-02

Material

材质

PBT


**2way**

Color

颜色

Natural

自然色


**M (6098-5070)****F (6098-5071)**

Color

颜色

Natural

自然色

**3way****F (6098-5833)**

Color

颜色

Natural

自然色



**4way**

Color

颜色

Natural

自然色

**M (6098-4944)****F (6098-4978)**

Color

颜色

Natural

自然色



Sumitomo Wiring Systems, Ltd.


C-03

HE SERIES

### 6way


Color  
颜色

Natural  
自然色



### 7way

**F (6098-5000)**




Color  
颜色

Natural  
自然色

C-04

**M (6098-4943)**

**F (6098-4979)**




Color  
颜色

Natural  
自然色

### 10way

**F (6098-4982)**




Color  
颜色

Green  
绿

### 12way


Color  
颜色

Natural  
自然色



**M (6098-4675)**

**F (6098-4640)**




Color  
颜色

Natural  
自然色

### 16way


Color  
颜色

Natural  
自然色



**M (6098-4333)**

**F (6098-4339)**



Color  
颜色

Natural  
自然色

### 20way

Color  
颜色

Natural  
自然色



**M (6098-4589)**

**F (6098-4595)**



Color  
颜色

Natural  
自然色

### 24way


Color  
颜色

Natural  
自然色



**M (6098-4588)**

**F (6098-4594)**



Color  
颜色

Natural  
自然色

## 34way

Color  
颜色

Natural  
自然色



**M (6098-4590)**

**F (6098-4596)**



Color  
颜色

Natural  
自然色

C-05


HE SERIES

# HE SERIES for STANDARD

## 1.0mm (040)

Structure / 构造





C-06

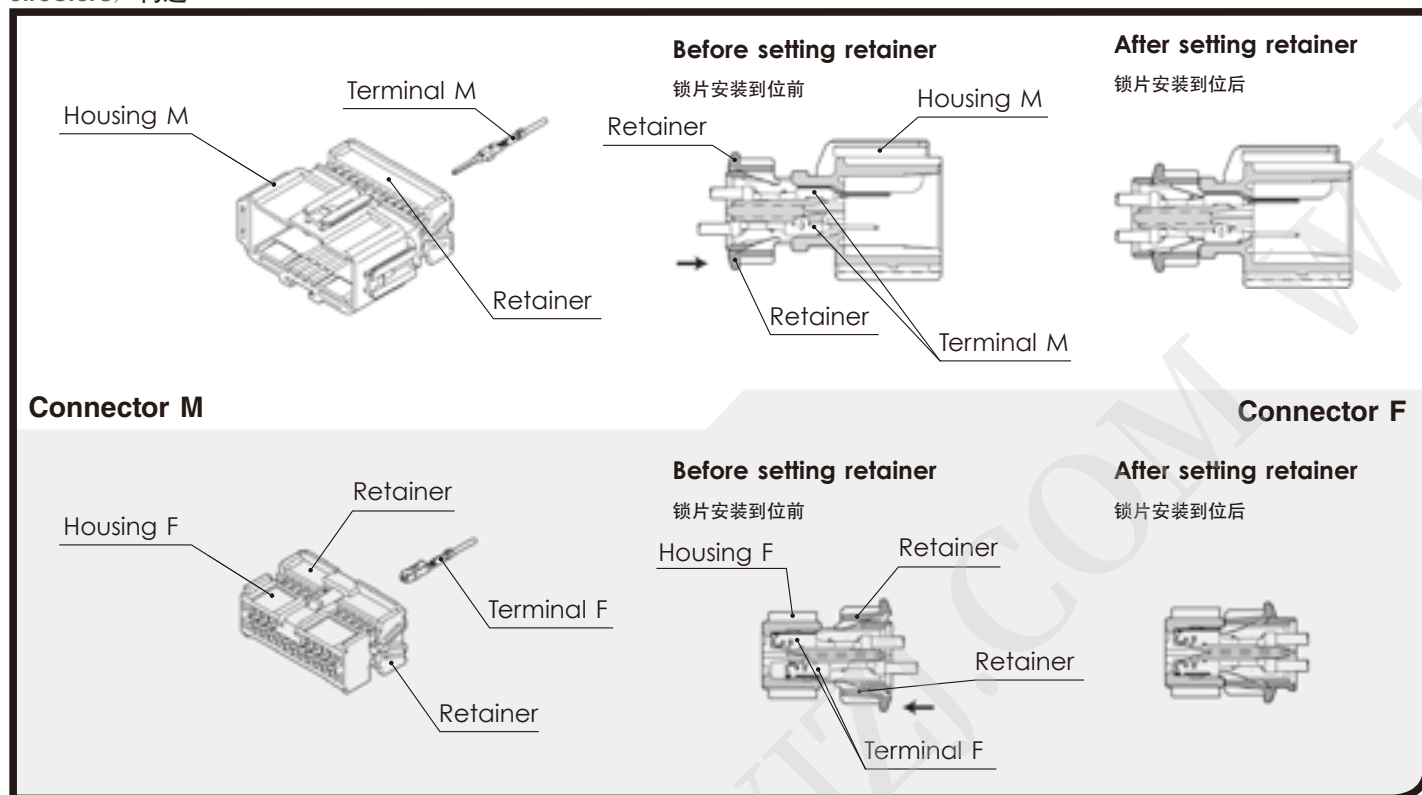






1.0mm (040)

**Terminal** (UNIT : mm)

端子(毫米)


**(SS)**Cable size (mm<sup>2</sup>) 0.22~0.35  
适用电线大小Cable overall diameter (mm) 0.95~1.1  
带绝缘层外径Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡**(S)**Cable size (mm<sup>2</sup>) 0.3~0.85  
适用电线大小Cable overall diameter (mm) 1.4~1.8  
带绝缘层外径Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡**M (8100-4307)****F (8100-4308)**Cable size (mm<sup>2</sup>) 0.22~0.35  
适用电线大小Cable overall diameter (mm) 0.95~1.1  
带绝缘层外径Material Heat-resistant  
铜合金Surface treatment Tin-plated  
表面处理 镀锡**M (8100-2972)****F (8100-2971)**Cable size (mm<sup>2</sup>) 0.3~0.85  
适用电线大小Cable overall diameter (mm) 1.4~1.8  
带绝缘层外径Material Heat-resistant  
铜合金Surface treatment Tin-plated  
表面处理 镀锡**1.0mm (040)****Housing** (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No. C-06  
端子参照页Material PBT  
材质**6way**Color Natural  
颜色 自然色**M (6098-2780)****F (6098-2781)**Color Natural  
颜色 自然色**2way****F (6098-5888)**Color Light Gray  
颜色 浅灰**5way****F (6098-2779)**Color Natural  
颜色 自然色**8way****F (6098-2782)**Color Natural  
颜色 自然色

13way


Color Natural  
颜色 自然色



C-08

M (6098-2788)


F (6098-2784)



Color Natural  
颜色 自然色


17way

Color Natural  
颜色 自然色



M (6098-3369)


F (6098-2785)



Color Natural  
颜色 自然色


21way

Color Natural  
颜色 自然色



M (6098-2789)

F (6098-2764)




Color Natural  
颜色 自然色

# HE SERIES for STANDARD

## 2.3mm (090)

### Structure / 构造

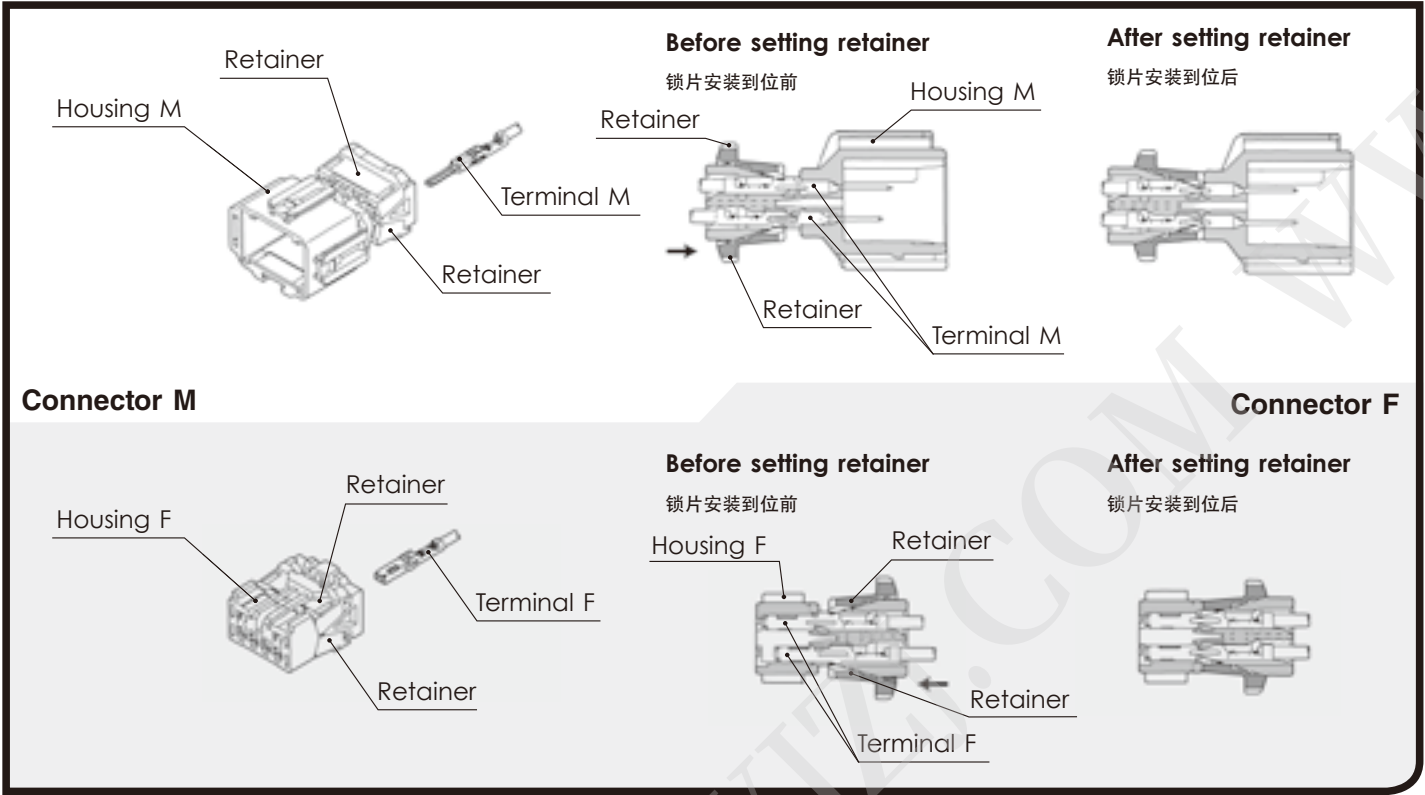

2.3mm (090)

**Terminal** (UNIT : mm)

端子(毫米)


(S)

|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.3~0.5          |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.4~2.1          |
| Material<br>材质                          | Brass<br>黄铜      |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡 |







**M (8100-1571)**






**F (8100-1470)**



|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.3~0.5          |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.4~2.1          |
| Material<br>材质                          | Brass<br>黄铜      |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡 |

**(M)**Cable size (mm<sup>2</sup>) 0.5~1.25  
适用电线大小Cable overall diameter (mm) 2.0~2.9  
带绝缘层外径Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡**(L)**Cable size (mm<sup>2</sup>) 2.0  
适用电线大小Cable overall diameter (mm) 2.6~3.1  
带绝缘层外径Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡**C-10****M (8100-1573)****F (8100-1472)**Cable size (mm<sup>2</sup>) 0.5~1.25  
适用电线大小Cable overall diameter (mm) 2.0~2.9  
带绝缘层外径Material Brass  
材质 黄铜Surface treatment Tin-plated  
表面处理 镀锡**M (8100-1572)****F (8100-1471)**Cable size (mm<sup>2</sup>) 2.0  
适用电线大小Cable overall diameter (mm) 2.6~3.1  
带绝缘层外径Material Heat-resistant copper alloy  
材质 耐热铜合金Surface treatment Tin-plated  
表面处理 镀锡**2.3mm (090)****Housing** (UNIT : mm)


接插件护套(毫米)

Ref: Terminal part No. C-09  
端子参照页Material PBT  
材质**2way**Color Natural  
颜色 自然色**M (6098-4901)****F (6098-4069)**Color Natural  
颜色 自然色**3way**Color Natural  
颜色 自然色**M (6098-5049)****F (6098-4071)**Color Natural  
颜色 自然色**4way**Color Natural  
颜色 自然色**M (6098-4902)****F (6098-4073)**Color Natural  
颜色 自然色

### 5way


Color  
颜色

Natural  
自然色



M (6098-4664)

F (6098-4669)




Color  
颜色

Natural  
自然色

### 6way


Color  
颜色

Sky Blue  
天蓝



M (6098-1373)

F (6098-1377)




Color  
颜色

Sky Blue  
天蓝

### 8way


Color  
颜色

Natural  
自然色



M (6098-4661)

F (6098-4670)




Color  
颜色

Natural  
自然色

### 8way

F (6098-1378)




Color  
颜色

Green  
绿

### 10way

F (6240-5378)




Color  
颜色

Natural  
自然色

### 14way


Color  
颜色

Natural  
自然色



M (6098-4662)

F (6098-4050)




Color  
颜色

Natural  
自然色

### 16way

F (6098-3563)




Color  
颜色

Natural  
自然色

### 20way

F (6098-1380)



Color  
颜色

Green  
绿

C-11

HE SERIES

# HE SERIES for STANDARD

## 4.8mm (187)

C-12


### 4.8mm (187)

## Terminal (UNIT : mm)

端子(毫米)


(M)

|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.5~1.25         |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.6~2.9          |
| Material<br>材质                          | Brass<br>黄铜      |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡 |



M (8100-0664)


F (8100-0606)



|                                         |                                |
|-----------------------------------------|--------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.5~1.25                       |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.6~2.9                        |
| Material<br>材质                          | Heat-resistant<br>copper alloy |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡               |


(S)

|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.3              |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.4~1.9          |
| Material<br>材质                          | Brass<br>黄铜      |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡 |



M (8100-1506)


F (8100-1507)



|                                         |                                |
|-----------------------------------------|--------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.3                            |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.4~1.9                        |
| Material<br>材质                          | Heat-resistant<br>copper alloy |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡               |


(L)

|                                         |                  |
|-----------------------------------------|------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 2.0~3.0          |
| Cable overall diameter (mm)<br>带绝缘层外径   | 2.6~3.8          |
| Material<br>材质                          | Brass<br>黄铜      |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡 |



M (1500-0166)

F (8100-0782)



|                                         |                                |
|-----------------------------------------|--------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 2.0~3.0                        |
| Cable overall diameter (mm)<br>带绝缘层外径   | 2.6~3.8                        |
| Material<br>材质                          | Heat-resistant<br>copper alloy |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡               |

4.8mm (187)

Housing (UNIT : mm)


接插件护套(毫米)

Ref: Terminal part No. C-13  
端子参照页

Material PBT  
材 质


2way

Color Natural  
颜 色 自然色



M (6098-5120)


F (6098-5119)



Color Natural  
颜 色 自然色

4way


F (6098-4971)



Color Natural  
颜 色 自然色


5way

Color Natural  
颜 色 自然色



M (6098-4663)

F (6098-4667)



Color Natural  
颜 色 自然色

# HE SERIES for STANDARD

9.5mm (375)


C-14

9.5mm (375)

Terminal (UNIT : mm)  
端子(毫米)

(S)

F (8240-0152)



5  
11.1  
27.5

|                             |              |
|-----------------------------|--------------|
| Cable size (mm²)            | 2.0~3.0      |
| 适用电线大小                      |              |
| Cable overall diameter (mm) | 2.6~4.1      |
| 带绝缘层外径                      |              |
| Material                    | Copper alloy |
| 材质                          | 铜合金          |
| Surface treatment           | Tin-plated   |
| 表面处理                        | 镀锡           |

(M)

F (8240-0153)



5  
11.1  
27.5

|                             |                             |
|-----------------------------|-----------------------------|
| Cable size (mm²)            | 5.0~8.0                     |
| 适用电线大小                      |                             |
| Cable overall diameter (mm) | 4.4~5.8                     |
| 带绝缘层外径                      |                             |
| Material                    | Heat-resistant copper alloy |
| 材质                          | 耐热铜合金                       |
| Surface treatment           | Tin-plated                  |
| 表面处理                        | 镀锡                          |

(L)

F (8240-0154)



5  
11.1  
27.5

|                             |                             |
|-----------------------------|-----------------------------|
| Cable size (mm²)            | 10.0                        |
| 适用电线大小                      |                             |
| Cable overall diameter (mm) | 6.5~6.9                     |
| 带绝缘层外径                      |                             |
| Material                    | Heat-resistant copper alloy |
| 材质                          | 耐热铜合金                       |
| Surface treatment           | Tin-plated                  |
| 表面处理                        | 镀锡                          |

9.5mm (375)


Housing (UNIT : mm)  
接插件护套(毫米)

Ref: Terminal part No. C-15  
端子参照页

Material PBT  
材质

1way rib A

F (6098-4973)




10.95  
13.9  
32.4

|       |         |
|-------|---------|
| Color | Natural |
| 颜色    | 自然色     |

1way rib B

F (6098-4974)




10.95  
13.9  
32.4

|       |       |
|-------|-------|
| Color | Black |
| 颜色    | 黑     |

1way

rib C

F (6098-4975)



10.95  
13.9  
32.4

Color


颜色

Dark Green

墨绿

2way

F (6098-4977)



10.95  
26.2  
32.4

Color

颜色

Green

绿

WWW.DZYTJZJ.COM

HE SERIES  
for HYBRID

0.64mm, 2.3mm  
(025, 090)

Housing (UNIT : mm)

接插件护套(毫米)


|                        |          |      |
|------------------------|----------|------|
| Ref: Terminal part No. | [0.64mm] | C-02 |
| 端子参照页                  | [2.3mm]  | C-09 |

|          |     |
|----------|-----|
| Material | PBT |
| 材 质      |     |

No. of way/ ( ) corresponds to 0.64mm, 2.3mm, in order from left to right.  
极数 / ( ) 内显示 : 从左向右为0.64mm 极数、2.3mm 极数


12way (6+6)

|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |



M (6098-6161)


F (6098-6162)



|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |


13way (9+4)

|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |



M (6098-5180)


F (6098-6562)



|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |


18way (9+9)

|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |



M (6098-4908)


F (6098-6478)



|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |


20way (16+4)

|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |



M (6098-4591)


F (6098-4597)



|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |


## 23way (14+9)

Color Natural  
颜色 自然色



M (6098-4707)


F (6098-6559)



Color Natural  
颜色 自然色


## 28way (24+4)

Color Natural  
颜色 自然色



M (6098-4725)

F (6098-4726)



Color Natural  
颜色 自然色

C-17

HE SERIES

1.0mm, 2.3mm  
(040, 090)

C-18

## Housing (UNIT : mm)

接插件护套(毫米)


Ref: Terminal part No. [1.0mm] C-06  
端子参照页 [2.3mm] C-09

Material PBT  
材 质

No. of way/ ( ) corresponds to 1.0mm, 2.3mm, in order from left to right.  
极数/ ( ) 内显示: 从左向右为1.0mm 极数、2.3mm 极数

9way (2+7)

F (6098-4075)




Color  
颜 色

Natural  
自然色

10way (2+8)

F (6098-4076)




Color  
颜 色

Natural  
自然色

10way (6+4)

F (6098-4666)




Color  
颜 色

Natural  
自然色

10way (8+2)

F (6098-3600)




Color  
颜 色

Natural  
自然色

14way (10+4)

F (6098-3601)




Color  
颜 色

Natural  
自然色

23way (19+4)

F (6098-3571)




Color  
颜 色

Natural  
自然色

23way (19+4)

F (6098-4367)



Color  
颜 色

Brown  
棕

1.0mm, 4.8mm  
(040, 187)

Housing (UNIT : mm)

接插件护套(毫米)


|                        |         |      |
|------------------------|---------|------|
| Ref: Terminal part No. | [1.0mm] | C-06 |
| 端子参照页                  | [4.8mm] | C-13 |

|          |     |
|----------|-----|
| Material | PBT |
| 材 质      |     |

No. of way/ ( ) corresponds to 1.0mm, 4.8mm, in order from left to right.  
极数 / ( ) 内显示 : 从左向右为1.0mm 极数、4.8mm 极数


12way (10+2)

|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |



M (6098-3370)


F (6098-2786)



|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |

14way (10+4)

F (6098-4017)



|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |

2.3mm, 4.8mm  
(090, 187)

C-20

Housing (UNIT : mm)

接插件护套(毫米)


Ref: Terminal part No. [2.3mm] C-09  
端子参照页 [4.8mm] C-13

Material PBT  
材 质

No. of way/ ( ) corresponds to 2.3mm, 4.8mm, in order from left to right.  
极数 / ( ) 内显示 : 从左向右为2.3mm 极数、4.8mm 极数


8way (6+2)

Color Natural  
颜 色 自然色



M (6098-5218)


F (6098-5217)



Color Natural  
颜 色 自然色


14way (12+2)

Color Natural  
颜 色 自然色



M (6098-4660)

F (6098-3565)



Color Natural  
颜 色 自然色

16way (14+2)


F (6950-1054)



Color Green  
颜 色 绿

18way (14+4)


F (6950-1055)



Color Green  
颜 色 绿

20way (16+4)

F (6950-1056)



Color Green  
颜 色 绿


## 8.0mm (312)

### Terminal (UNIT : mm)

端子(毫米)


(M)

|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0~3.0          |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 2.6~4.1          |
| <b>Material</b><br>材质                        | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |



M (8100-0521)


F (8100-0706)



|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0~3.0          |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 2.6~4.1          |
| <b>Material</b><br>材质                        | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |


(S)

|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.5~1.25         |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.6~2.9          |
| <b>Material</b><br>材质                        | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |



M (8100-0520)


F (8100-0707)



|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.5~1.25         |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.6~2.9          |
| <b>Material</b><br>材质                        | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |


(L)

|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 5.0~8.0          |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 4.4~5.8          |
| <b>Material</b><br>材质                        | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |



M (8100-0522)

F (8100-1553)



|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 5.0~8.0                        |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 4.4~5.8                        |
| <b>Material</b><br>材质                        | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

## 4.8mm, 8.0mm (187, 312)

### Housing (UNIT : mm)

接插件护套(毫米)


|                               |         |      |
|-------------------------------|---------|------|
| <b>Ref: Terminal part No.</b> | [4.8mm] | C-13 |
| 端子参照页                         | [8.0mm] | C-21 |

|                       |     |
|-----------------------|-----|
| <b>Material</b><br>材质 | PBT |
|-----------------------|-----|

No. of way/ ( ) corresponds to 4.8mm, 8.0mm, in order from left to right.  
极数/ ( ) 内显示: 从左向右为4.8mm 极数、8.0mm 极数


6way (4+2)

|                    |                |
|--------------------|----------------|
| <b>Color</b><br>颜色 | Natural<br>自然色 |
|--------------------|----------------|



M (6098-3567)

F (6098-3569)



|                    |                |
|--------------------|----------------|
| <b>Color</b><br>颜色 | Natural<br>自然色 |
|--------------------|----------------|

# HE SERIES

## for PCB

## Housing (UNIT : mm)

接插件护套(毫米)

Material  
材 质


PBT G30

13way


(Vertical type) (垂直)

**M (6098-3239)**

●Detailed dimension  
详细尺寸



●Recommended demension of Circuit board  
电路板推荐尺寸



**Connector F part No.** 6098-2784 (C-08)  
**母端接插件产品号码**

|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |

**1.0mm, 2.3mm**  
**(040, 090)**

## Housing (UNIT : mm)

接插件护套(毫米)

Material  
材 质


PBT G30

23way


(Vertical type) (垂直)

**M (6098-3572)**

●Detailed dimension  
详细尺寸



● Recommended dimension of Circuit board  
电路板推荐尺寸



**Connector F part No.** 6098-3571 (C-19)  
**母端接插件产品号码**

|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |

1.0mm, 4.8mm  
(040, 187)

C-23

HE SERIES

## Housing (UNIT : mm)

接插件护套(毫米)

Material

材质


PBT G30

14way

(Vertical type) (垂直)

M (6098-4018)

● Detailed dimension  
详细尺寸



● Recommended dimension of Circuit board  
电路板推荐尺寸



Connector F part No. 6098-4017 (C-20)  
母端接插件产品号码

Color Natural  
颜色 自然色

2.3mm (090)

## Housing (UNIT : mm)

接插件护套(毫米)

Material

材质


PBT G30

6way


(Vertical type) (垂直)

M (6098-3616)

● Detailed dimension  
详细尺寸



● Recommended dimension of Circuit board  
电路板推荐尺寸



Connector F part No. 6098-1377 (C-11)  
母端接插件产品号码

Color Sky Blue  
颜色 天蓝


# HE SERIES

## COMMON USE

### PARTS

(6810-1203)

|                             |            |
|-----------------------------|------------|
| Clamp fitting hole size(mm) | φ 7        |
| 适合孔穴尺寸                      |            |
| Clamp fitting thickness(mm) | t=0.65~1.6 |
| 卡钉适合板厚                      |            |
| Material                    | 6 Nylon    |
| 材 质                         |            |
| Color                       | Red        |
| 颜 色                         | 红          |




(6810-1217)

|                             |           |
|-----------------------------|-----------|
| Clamp fitting hole size(mm) | φ 7       |
| 适合孔穴尺寸                      |           |
| Clamp fitting thickness(mm) | t=1.6~2.6 |
| 卡钉适合板厚                      |           |
| Material                    | 6 Nylon   |
| 材 质                         |           |
| Color                       | Brown     |
| 颜 色                         | 棕         |




(6810-1204)

|                             |            |
|-----------------------------|------------|
| Clamp fitting hole size(mm) | φ 10       |
| 适合孔穴尺寸                      |            |
| Clamp fitting thickness(mm) | t=0.65~1.6 |
| 卡钉适合板厚                      |            |
| Material                    | 6 Nylon    |
| 材 质                         |            |
| Color                       | Natural    |
| 颜 色                         | 自然色        |



(6810-1462)

|                             |                    |
|-----------------------------|--------------------|
| Clamp fitting hole size(mm) | 6×12 (Square hole) |
| 适合孔穴尺寸                      |                    |
| Clamp fitting thickness(mm) | t=0.65~1.6         |
| 卡钉适合板厚                      |                    |
| Material                    | 6 Nylon            |
| 材 质                         |                    |
| Color                       | Orange             |
| 颜 色                         | 橙                  |




## Body fastening clamp

### (Bracket type) (mm)

Connector M can be accoupled with clamp, if necessary, to fasten to the body side bracket.  
公端接插件在必要时可以安装卡钉用以固定在车体上。


(6910-0119)

|                   |                            |
|-------------------|----------------------------|
| Bracket direction | Connector mating direction |
| 插入支架的方向           | 接插件嵌合方向                    |
| Material          | 6 Nylon                    |
| 材 质               |                            |
| Color             | Red                        |
| 颜 色               | 红                          |




(6910-0120)

|                   |                 |
|-------------------|-----------------|
| Bracket direction | Anti clock wise |
| 插入支架的方向           | 接插件嵌合的反方向       |
| Material          | 6 Nylon         |
| 材 质               |                 |
| Color             | Natural         |
| 颜 色               | 自然色             |



# HV/HVG SEALED SERIES

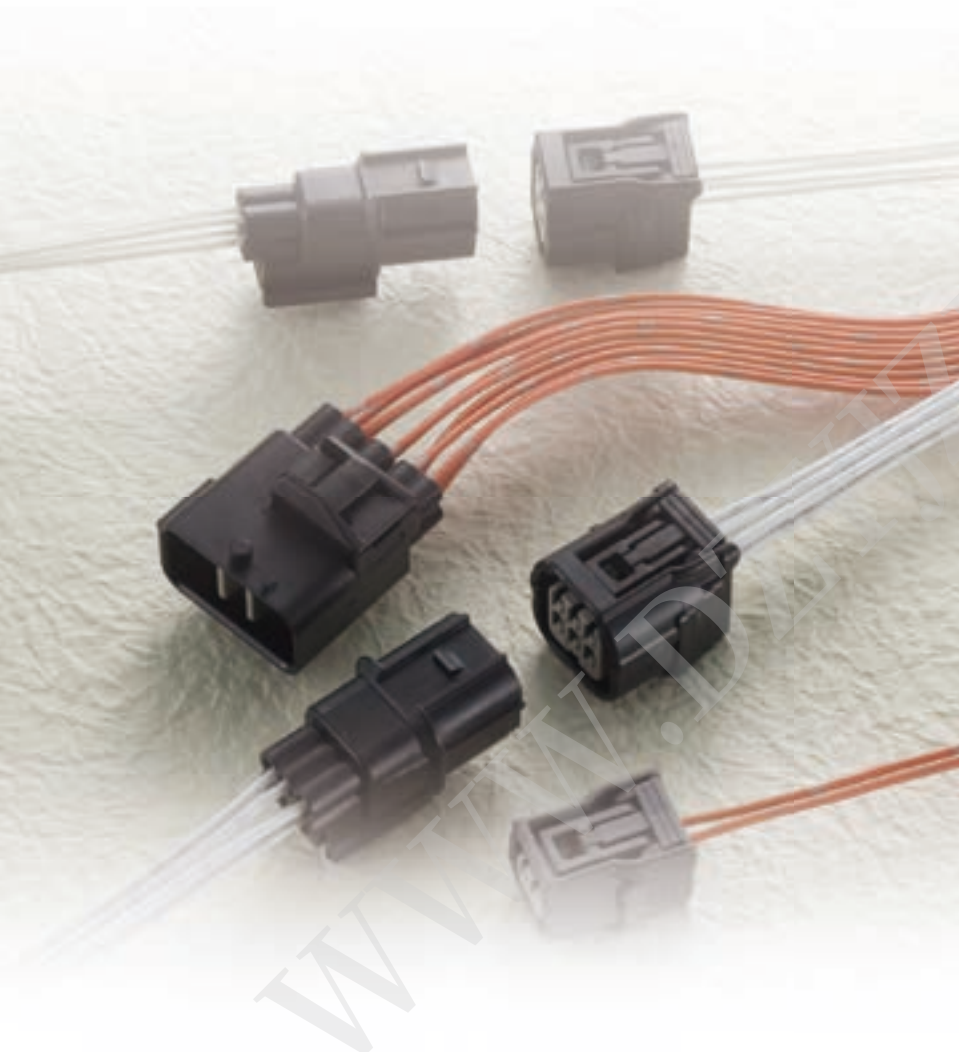

## Features

The HV sealed connector series is an improved version of the existing HX sealed connector series and it is a highly reliable connector series.

Also the HVG sealed series is what is added a finger holding portion to the side wall of the female connector of the HV sealed series so as to improving matting performance. It has a mechanism that detects terminal incomplete insertion.

- The connector mechanism only allows the retainer to be set when the terminal is completely inserted.
- These connectors can be directly secured to a bracket on the car body.
- RoHS/ELV Compliant

## 特点

HV 防水系列是将以往的 HX 防水系列改良后，提高了可信性的接插件系列。

此外，HVG 防水系列在 HV 防水系列的母端接插件的侧壁上还增加了指扣，提高了接插件插入作业的操作性。

具备检测端子插入不到位的构造。


- 具有当端子在半插入状态时，锁片无法组装到位的检知构造。
- 接插件可以直接固定在车体支架上。
- 可对应欧盟 RoHS 和 ELV 指令

# HV/HVG SEALED SERIES for STANDARD

1.0mm (040)


Structure / 构造

D-02

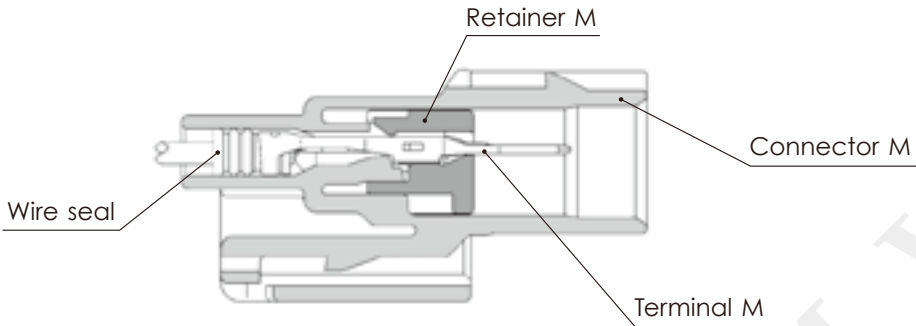

Connector M

Connector F

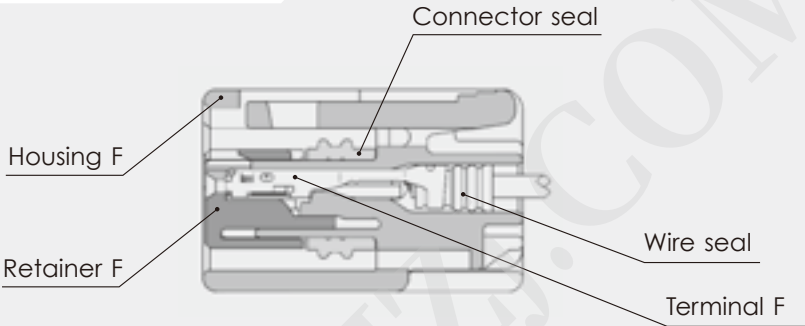

1.0mm (040)

## Terminal (UNIT : mm)

端子 (毫米)

Ref; 1.0mm Terminal detail  
1.0mm端子参照页

|          |                      |      |                      |      |
|----------|----------------------|------|----------------------|------|
| <b>S</b> | <b>M (8100-3177)</b> | E-02 | <b>F (8100-3067)</b> | E-02 |
| <b>M</b> | <b>M (8100-3178)</b> | E-02 | <b>F (8100-3068)</b> | E-02 |

1.0mm (040)

## Wire seals (UNIT : mm)

电线密封栓 (毫米)

Ref; 1.0mm Wire Seals detail  
1.0mm电线密封栓参照页

|                       |      |
|-----------------------|------|
| <b>SS (7165-1075)</b> | E-03 |
| <b>S (7165-0621)</b>  | E-03 |
| <b>M (7165-0622)</b>  | E-03 |

The wire seals are common to M and F.  
电线密封栓为公端、母端共用。

# 1.0mm (040)

## Dummy plugs (UNIT : mm)

盲塞 (毫米)

Ref; 1.0mm Dummy plug detail

1.0mm盲塞参照页

(7165-0432) E-04

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

# 1.0mm (040)

## Housing (UNIT : mm)

接插件护套 (毫米)

Ref: Terminal part No. E-02  
端子参照页


Ref: wire seal No. E-03  
电线密封栓参照页

Ref: Dummy plug No. E-04  
盲塞参照页

Material PBT  
材 质


### 3way

Color Black  
颜 色




M (6188-4775)

F (6189-7037)



NOTE1)

Color Black  
颜 色





Retainer No. (6918-1833)

Black 黑

### 2way

F (6189-7036)



Retainer No. (6918-1835)



Color Black  
颜 色

Black 黑

### 2way

(Rib difference) (Rib差异)

F (6189-7052)



Retainer No. (6918-1835)



Color Dark Gray  
颜 色

Dark Gray 深灰

### 3way

(Rib difference) (Rib差异)

F (6189-7058)



Retainer No. (6918-1833)

Color Dark Gray  
颜 色

Dark Gray 深灰

**4way**

Color  
颜色

Black  
黑

**M (6188-4776)**

**F (6189-7039)**

NOTE1)

Retainer No. (6918-2810)

Color  
颜色

Black  
黑

**5way**

Color  
颜色

Black  
黑

**F (6189-6909)**

NOTE1)

Retainer No. (6918-2128)

Color  
颜色

Black  
黑

**6way**

Color  
颜色

Black  
黑

**M (6188-4908)**

**F (6189-7040)**

NOTE1)

Retainer No. (6918-2913)

Color  
颜色

Black  
黑

**10way**

Color  
颜色

Black  
黑

**M (6181-6481)**

**F (6189-6906)**

Retainer No. (6918-2804)

Retainer No. (6918-2806)

Color  
颜色

Black  
黑

NOTE1) HV SEALED SERIES

# HX SEALED SERIES

## Features

The HX sealed connector series is the highly reliable improved version of the conventional HW sealed series, with a mechanism that detects when terminals are not inserted completely.

This series consists of 1.0mm • 1.5mm • 2.3mm types (0.64mm • 1.0mm • 1.5mm • 2.3mm • 4.8mm types for the hybrid model) classified according to terminal size, supporting use in a variety of control circuits and low power circuits.

- The connector mechanism only allows the retainer to be set when the terminal is completely inserted.
- The hybrid model can be directly secured to a bracket on the car body, but this is only possible when the locking mechanism ensures the connectors are completely engaged, preventing semi-engagement.
- RoHS/ELV Compliant

## 特点

HX 系列是将以往的 HW 系列改良后、提高了可信性的接插件。

具有检测端子插入不足的结构。

按照端子尺寸划分为1.0mm • 1.5mm • 2.3mm (混合为 0.64mm • 1.0mm • 1.5mm • 2.3mm • 4.8mm)，可以应用于各种控制回路与低功率回路。


- 拥有当端子在半插入状态时，锁片无法组装到位的检知构造。
- 混合型的接插件具有在未完全嵌合的状态下，无法固定到车体支架上的锁定构造。
- 混合型的接插件可以直接固定在车体的支架上。
- 可对应欧盟 RoHS 和 ELV 指令

# HX SEALED SERIES for STANDARD

1.0mm (040)

Structure / 构造

E-02

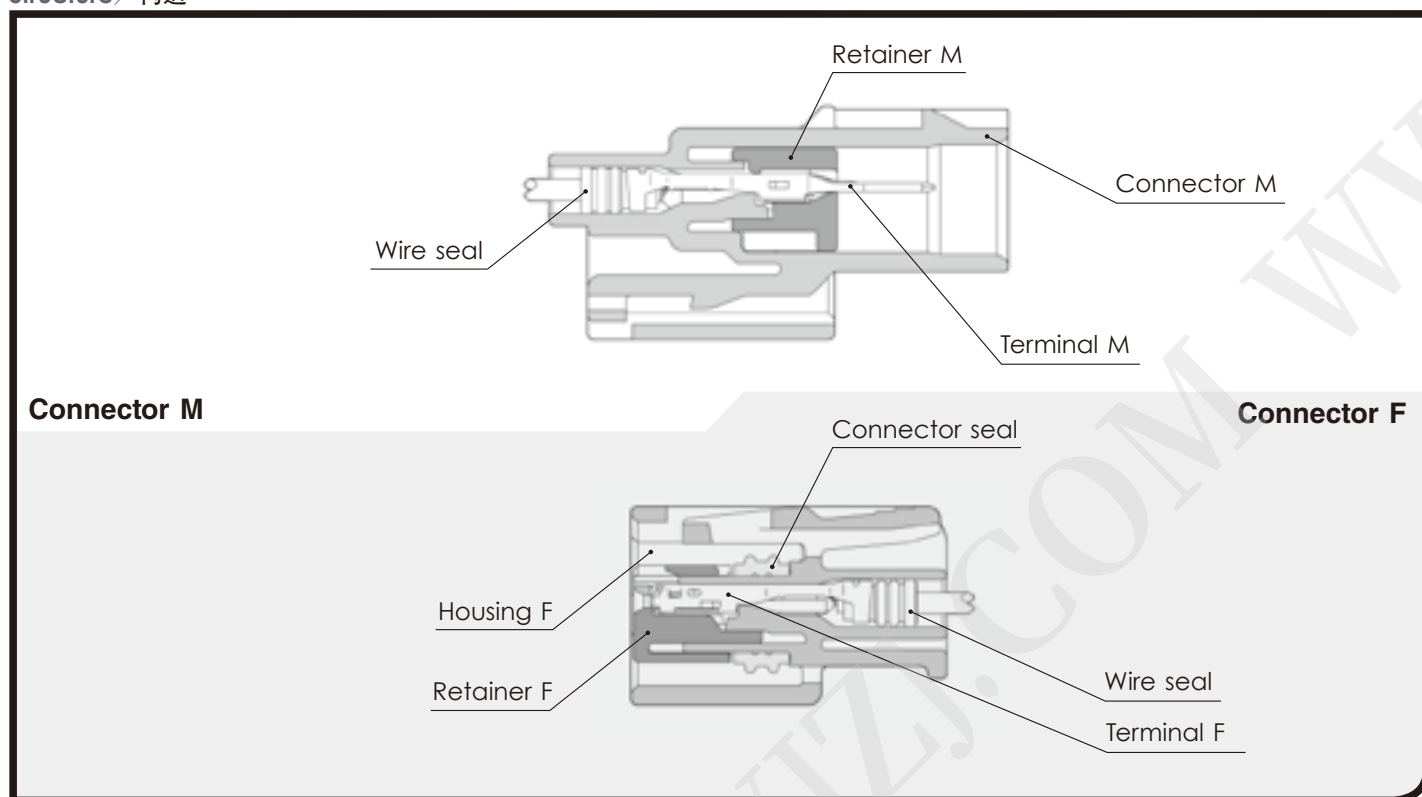


1.0mm (040)

**Terminal** (UNIT : mm)



端子(毫米)

**(S)**


|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5          |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.4~2.0          |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**(M)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75~1.25                      |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.8~2.2                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3177)****F (8100-3067)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.4~2.0                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3178)****F (8100-3068)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75~1.25                      |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.8~2.2                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**E-03**

HX SEALED SERIES

**1.0mm (040)**

## Wire seals (UNIT : mm)


电线密封栓 (毫米)

The wire seals are common to M and F.

电线密封栓为公端、母端共用。

**(SS)****(7165-1075)**

|                                              |                                                               |
|----------------------------------------------|---------------------------------------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | (AVSS/0.3) (AVSSX/0.3) (AVSSH/0.3)<br>(CHFUS/0.35) (CHFS/0.5) |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.1~1.6                                                       |
| <b>Material</b><br>材 质                       | Silicon<br>硅                                                  |
| <b>Color</b><br>颜 色                          | Orange<br>橙                                                   |

**(S)****(7165-0621)**

|                                              |                                                            |
|----------------------------------------------|------------------------------------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | (AVS/0.3) (AVS/0.5) (AVSSX/0.5)<br>(AVSSH/0.5) (CHFS/0.75) |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.6~1.9                                                    |
| <b>Material</b><br>材 质                       | Silicon<br>硅                                               |
| <b>Color</b><br>颜 色                          | Light Green<br>淡绿                                          |

**(M)****(7165-0622)**

|                                              |                                                                                                              |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | (AVS/0.5) (AVS/0.85) (AVSS/0.75~1.25) (AVSSX/0.75~1.25)<br>(AVSSH/0.75~1.25) (AVX/0.5) (AVX/0.75) (CHFS/1.0) |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.8~2.2                                                                                                      |
| <b>Material</b><br>材 质                       | Silicon<br>硅                                                                                                 |
| <b>Color</b><br>颜 色                          | Violet<br>紫                                                                                                  |



1.0mm (040)

## Dummy plugs (UNIT : mm)

盲塞(毫米)

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

(7165-0432)

Material


NBR

Color

Black

颜色

黑



1.0mm (040)

## Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No.

端子参照页

E-02

Ref: wire seal No.

电线密封栓参照页

E-03

Ref: Dummy plug No.

盲塞参照页

E-04

Material

材质

PBT


1way

Color

Black


颜色

黑



M (6188-0657)

F (6189-0940)



Retainer No. (6918-1799)


Color  
颜色

Black  
黑

2way



Color  
颜色

Black  
黑



M (6188-0589)

F (6189-0890)



Retainer No. (6918-1835)

Color  
颜色


Black  
黑

2way

(Rib difference) (Rib差异)



Color  
颜色

Dark Gray  
深灰



M (6188-0590)

F (6189-0891)



Retainer No. (6918-1835)



Color  
颜色

Dark Gray  
深灰

**3way**

Color  
颜色



Black  
黑

**M (6188-4739)****F (6189-0887)**

Retainer No. (6918-1833)

Color  
颜色


Black  
黑

**3way****(Rib difference) (Rib差异)****F (6189-0968)**

Retainer No. (6918-1833)

Color  
颜色

Black  
黑

**5way****F (6189-1081)**

Retainer No. (6918-2128)



Color  
颜色

Black  
黑

**6way**

Color  
颜色



Black  
黑

**M (6188-0658)****F (6189-1012)**

Retainer No. (6918-2056)

Color  
颜色

Black  
黑

**7way****F (6189-0855)**

Retainer No. (6918-1762)

Color  
颜色

Black  
黑


**E-05**

HX SEALED SERIES

# HX SEALED SERIES for 23way and 33way

1.0mm (040)

Structure / 构造

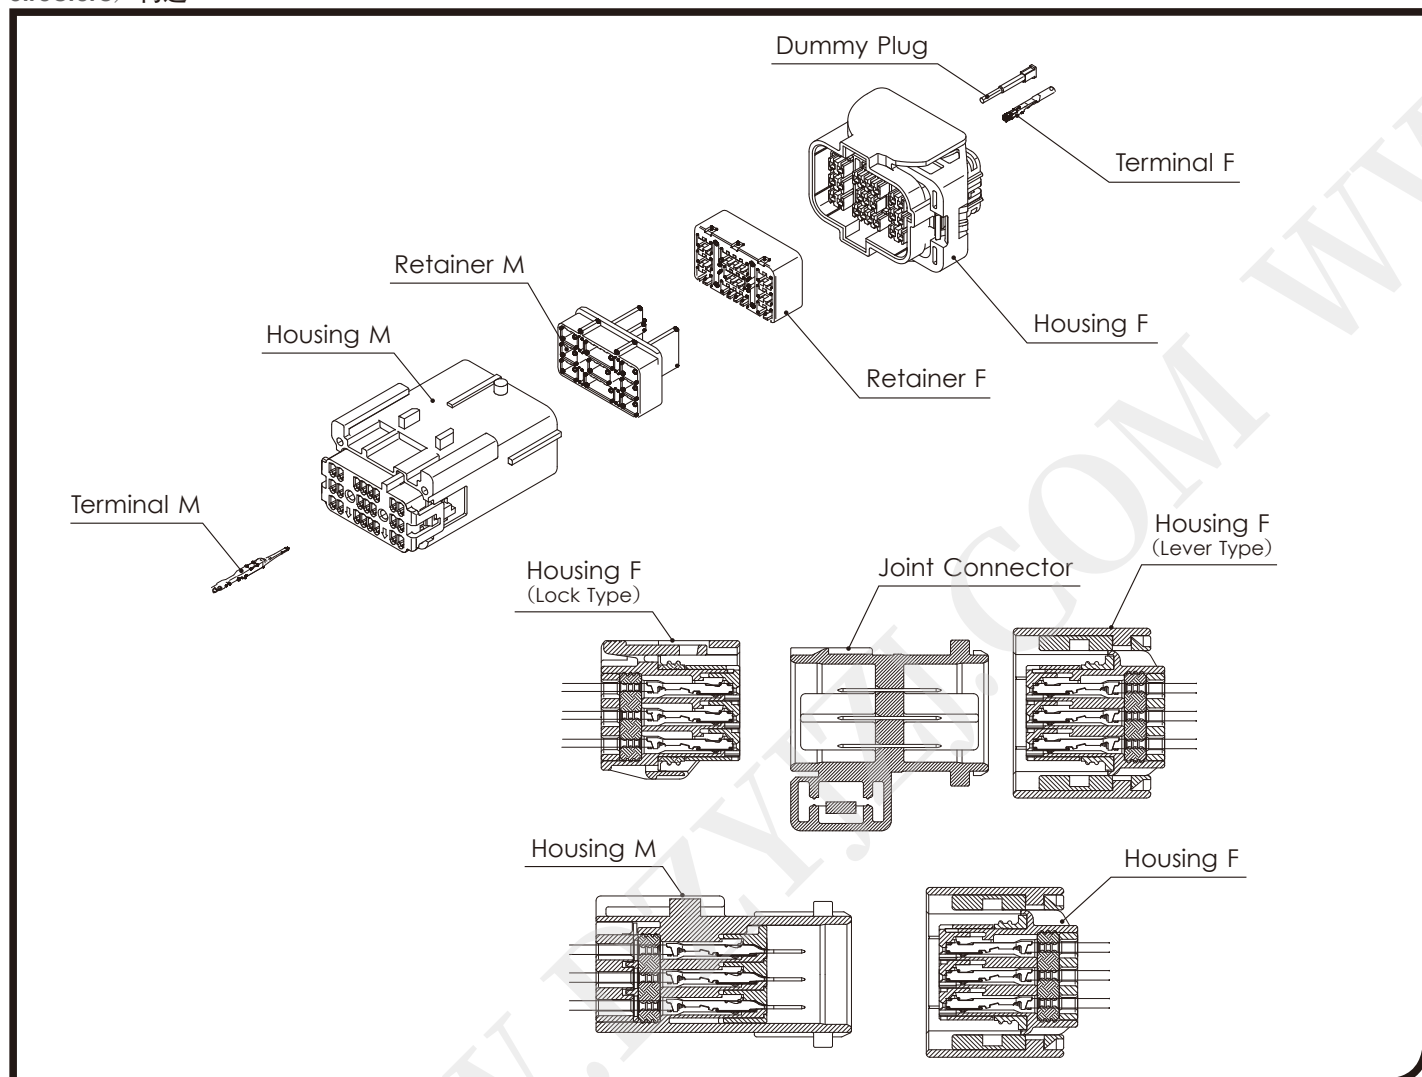


1.0mm (040)

**Terminal** (UNIT : mm)



端子(毫米)

**(S)**


|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5          |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**(M)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75~1.25                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3508)****F (8100-3082)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3507)****F (8100-3083)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75~1.25                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |


**1.0mm (040)****Dummy plugs (UNIT : mm)**

盲塞 (毫米)

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

**(6914-0050)**

|                        |            |
|------------------------|------------|
| <b>Material</b><br>材 质 | PP         |
| <b>Color</b><br>颜 色    | Brown<br>棕 |



**1.0mm (040)****Housing (UNIT : mm)**

接插件护套 (毫米)



|                                        |      |
|----------------------------------------|------|
| <b>Ref: Terminal part No.</b><br>端子参照页 | E-07 |
| <b>Ref: Dummy plug No.</b><br>盲塞参照页    | E-07 |
| <b>Material</b><br>材 质                 | PBT  |

**23way**

|                     |            |
|---------------------|------------|
| <b>Color</b><br>颜 色 | Black<br>黑 |
|---------------------|------------|



Retainer No. (6918-2131)

**M (6188-0660)****F (6189-1082)**

Retainer No. (6918-2132)

|                     |            |
|---------------------|------------|
| <b>Color</b><br>颜 色 | Black<br>黑 |
|---------------------|------------|




Sumitomo Wiring Systems, Ltd.

E-07

HX SEALED SERIES

23way



Joint Connector



Coupling circuit is connected with busbers as shown gray hatched cavities.



M (6188-4787)

Color  
颜色 Black  
黑





M (6188-4789)

Color  
颜色 Dark Gray  
深灰





M (5010-8627)

Color  
颜色 Dark Blue  
藏青





M (5011-1590)

Color  
颜色 Brown  
棕




M (5011-6687)



Color  
颜色 Blue  
蓝



F (6189-1082) Lever



Lock F (6189-6914)



**33way**

Color 颜色      Black 黑

Retainer No. (6918-2103)

**M (6188-0697)**      **F (6189-1050)**

Retainer No. (6918-2104)

Color 颜色      Black 黑

**33way**      (Rib difference) (Rib差异)

Color 颜色      Dark Gray 深灰

Retainer No. (6918-2103)

**M (6188-0698)**      **F (6189-1051)**

Retainer No. (6918-2104)

Color 颜色      Dark Gray 深灰

**Bracket Holder**

(6920-0886)

Color 颜色      Black 黑

**Bracket Holder**

(6920-0861)

Color 颜色      Black 黑

**Bracket Holder**

(6920-2376)

Color 颜色      Dark Blue 藏青

**Bracket Holder**

(6920-2377)

Color 颜色      Black 黑

**Bracket Holder**

(6920-0884)

Color 颜色      Black 黑

**Bracket Holder**

(6920-2466)


Color 颜色      Black 黑

# HX SEALED SERIES

22way Joint Connector

HYBRID 0.64mm,1.0mm (025, 040)

Structure / 构造

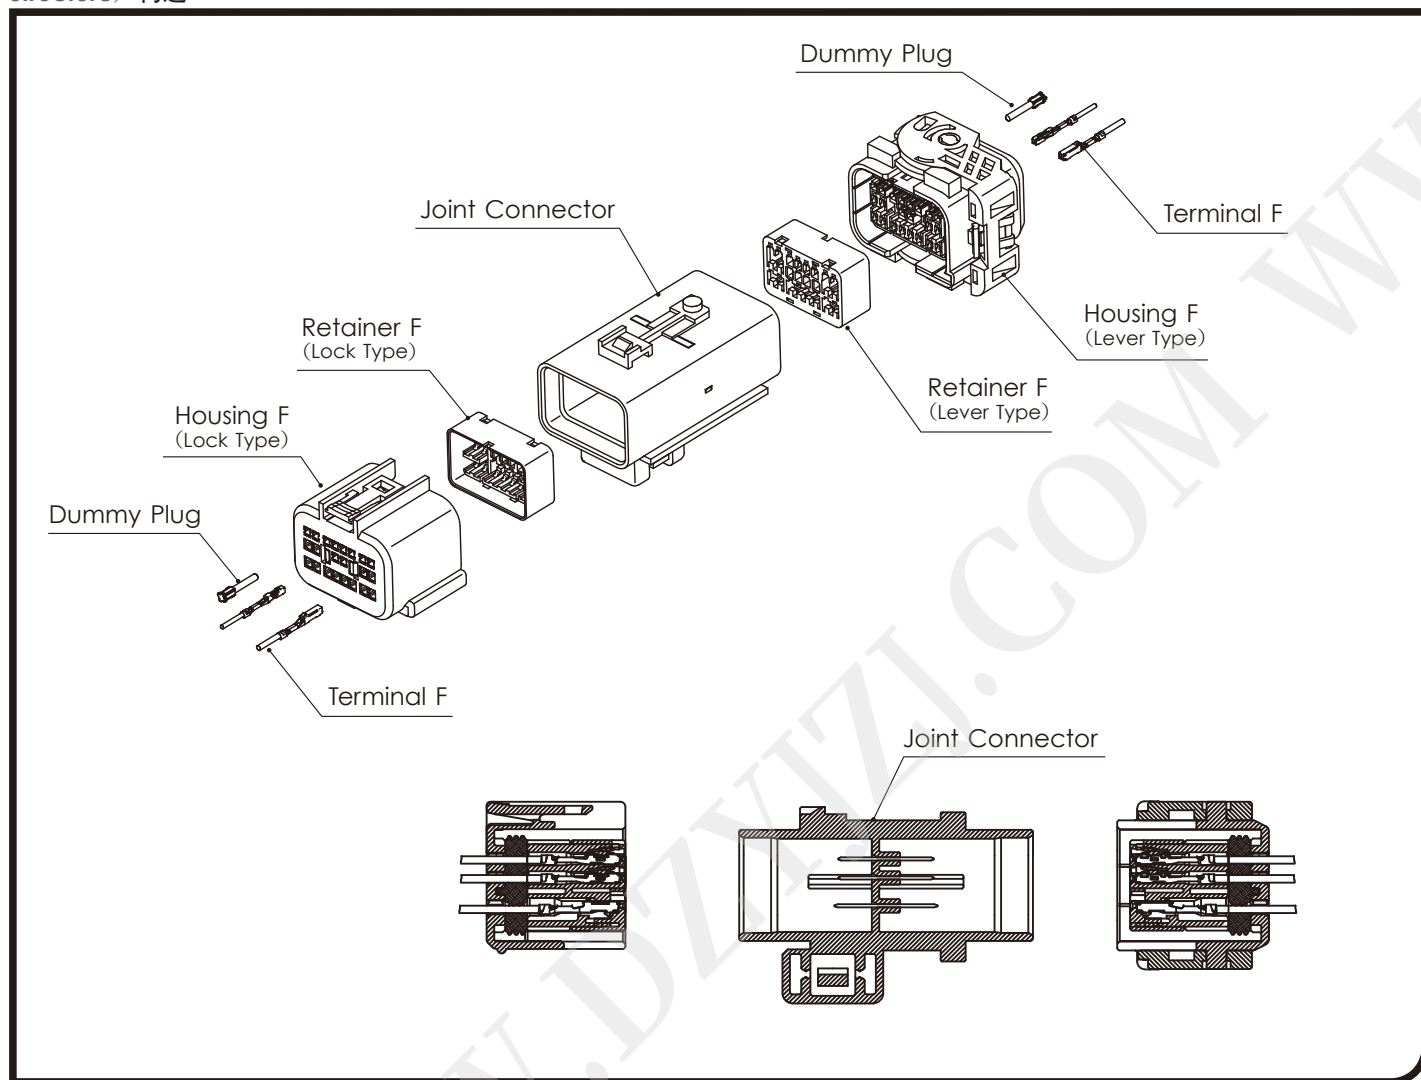

0.64mm (025)


Terminal (UNIT : mm)

端子(毫米)

(SS)


F (8240-0408)

|                                         |                                |
|-----------------------------------------|--------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | AVSSH0.22                      |
| Material<br>材质                          | Heat-resistant<br>copper alloy |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡               |




**(S)****F (8240-0409)**


|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | AVSSH0.3~0.5                   |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(M)****F (8240-0410)**


|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | AVSSH0.75                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**1.0mm (040)****(S)****F (8240-0411)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | AVSSH0.3<br>~AVSSH0.5          |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(M)****F (8240-0412)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | AVSSH0.75<br>~AVSSH1.25        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**Terminal (UNIT : mm)**

端子(毫米)


**0.64mm, 1.0mm (025, 040)****Dummy plugs (UNIT : mm)**

盲塞(毫米)

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

**(6914-0127)**

|                        |           |
|------------------------|-----------|
| <b>Material</b><br>材 质 | PBT       |
| <b>Color</b><br>颜 色    | Blue<br>蓝 |

**E-11**

HX SEALED SERIES

## Housing (UNIT : mm)

**Ref: Terminal part No.**  
端子参照页

[0.64mm] E-10  
[1.0mm] E-11


Ref: Dummy plug No.  
盲塞参照页

|          |      |
|----------|------|
| [0.64mm] | E-11 |
| [1.0mm]  | E-11 |

Material  
材 质

PBT



## Joint Connector



Coupling circuit is connected with busbars as shown gray hatched cavities.



**M (5011-6818)**

|       |       |
|-------|-------|
| Color | Brown |
| 颜色    | 棕     |





**M (5011-7740)**

|       |       |
|-------|-------|
| Color | Black |
| 颜色    | 黑     |





**M (5011-7860)**

|       |           |
|-------|-----------|
| Color | Dark Gray |
| 颜色    | 深灰        |




**F (6189-7264)**

## Lever



Retainer No. (6918-3166)

|       |       |
|-------|-------|
| Color | Black |
| 颜 色   | 黑     |



## Lock

**F (6189-7263)**




Retainer No. (6918-3166)

|       |       |
|-------|-------|
| Color | Black |
| 颜 色   | 黑     |

# HX SEALED SERIES for STANDARD

1.5mm (060)

Structure / 构造

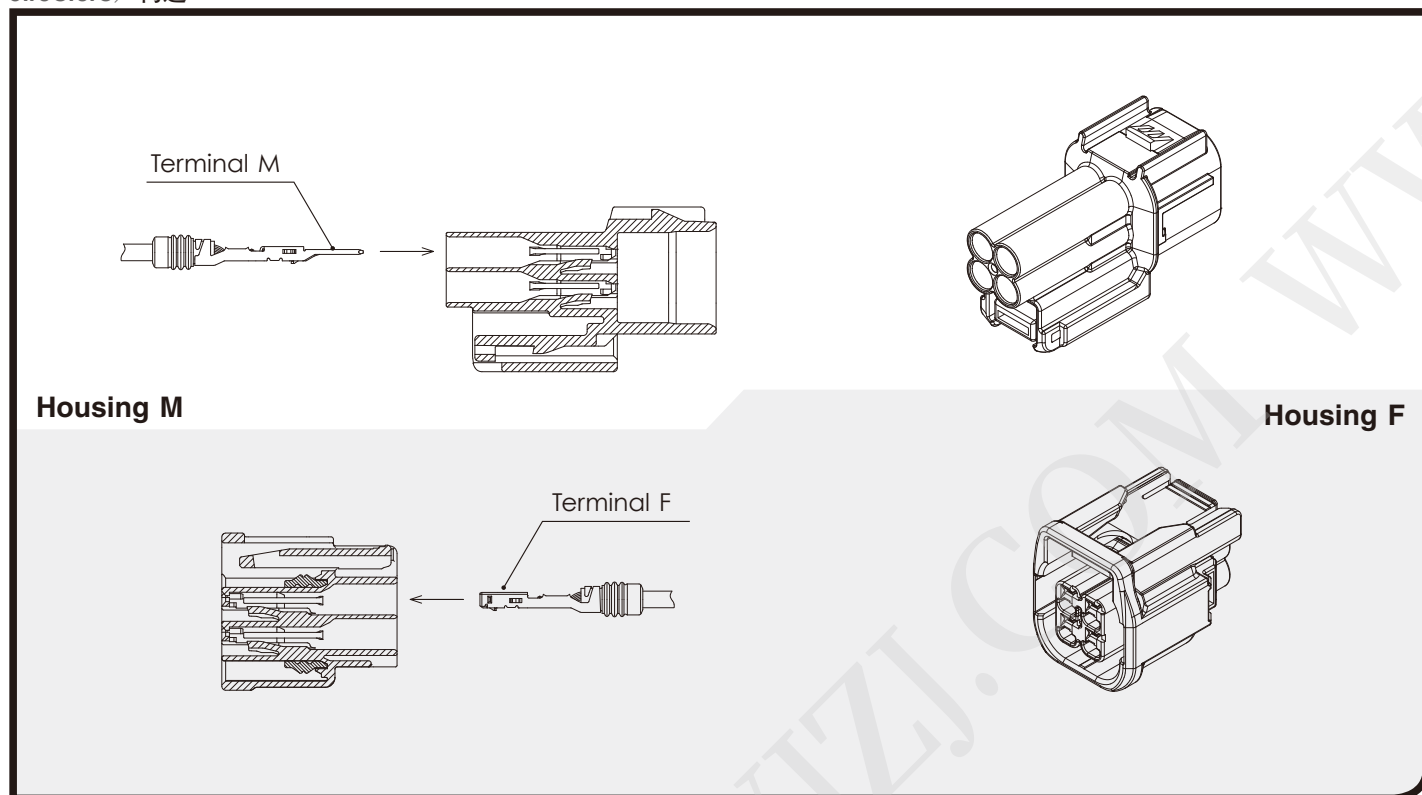

E-13

HX SEALED SERIES

1.5mm (060)

Terminal (UNIT : mm)

端子(毫米)

(SS)

Cable size (mm<sup>2</sup>) 0.13~0.22

Material Brass  
材质 黄铜

Surface treatment Tin-plated  
表面处理 镀锡



(S)

Cable size (mm<sup>2</sup>) 0.3~0.5


Material Brass  
材质 黄铜

Surface treatment Tin-plated  
表面处理 镀锡



M (8230-5306)

F (8240-0489)



Cable size (mm<sup>2</sup>) 0.13~0.22  
适用电线大小

Material Heat-resistant copper alloy  
材质

Surface treatment Tin-plated  
表面处理 镀锡

M (8230-5307)

F (8240-0490)



Cable size (mm<sup>2</sup>) 0.3~0.5  
适用电线大小

Material Heat-resistant copper alloy  
材质

Surface treatment Tin-plated  
表面处理 镀锡

(M)

Cable size (mm<sup>2</sup>) 0.75~1.25


Material Brass  
材质 黄铜

Surface treatment Tin-plated  
表面处理 镀锡



M (8230-5308)

F (8240-0491)



Cable size (mm<sup>2</sup>) 0.75~1.25  
适用电线大小

Material Heat-resistant copper alloy  
材质

Surface treatment Tin-plated  
表面处理 镀锡

(L)

Cable size (mm<sup>2</sup>) 2.0

Material Brass  
材质 黄铜

Surface treatment Tin-plated  
表面处理 镀锡



M (8230-5309)

F (8240-0492)



Cable size (mm<sup>2</sup>) 2.0  
适用电线大小

Material Heat-resistant copper alloy  
材质

Surface treatment Tin-plated  
表面处理 镀锡

1.5mm (060)

## Wire seals (UNIT : mm)

电线密封栓(毫米)

电线密封栓为公端、母端共用。

(SS)

(7165-1562)

Cable overall diameter (mm) 0.85~1.2  
带绝缘层外径

Material Silicon  
材质 硅

Color Violet  
颜色 紫




**(S)****(7165-1563)**

Cable overall diameter (mm)  
带绝缘层外径 1.05~1.5

**Material**  
材 质 Silicon  
硅


**Color**  
颜 色 Sky Blue  
天蓝

**(M)****(7165-1564)**

Cable overall diameter (mm)  
带绝缘层外径 1.35~1.9

**Material**  
材 质 Silicon  
硅


**Color**  
颜 色 Light Green  
淡绿

**(L)****(7165-1565)**

Cable overall diameter (mm)  
带绝缘层外径 1.75~2.4

**Material**  
材 质 Silicon  
硅


**Color**  
颜 色 Blue  
蓝

**(LL)****(7165-1566)**

Cable overall diameter (mm)  
带绝缘层外径 2.4~3

**Material**  
材 质 Silicon  
硅

**Color**  
颜 色 Dark Yellow  
深黄色

**E-15**

HX SEALED SERIES

## 1.5mm (060)

### Dummy plugs (UNIT : mm)

盲塞(毫米)

Ref; 1.5mm Dummy plug detail

1.5mm盲塞参照页

**(7165-0193)** J-07

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

## 1.5mm (060)

### Housing (UNIT : mm)

接插件护套(毫米)

**Ref: Terminal part No.**  
端子参照页 E-14



**Ref: wire seal No.**  
电线密封栓参照页 E-14

**Ref: Dummy plug No.**  
盲塞参照页 J-07

**Material**  
材 质 PBT

### 2way


**Color**  
颜 色 Black  
黑

**M (6181-6851)****F (6189-7408)**

**Color**  
颜 色 Black  
黑

3way

F (6189-7494)



16.25  
23.6  
23.25

Color

颜色


Black

黑


8way

M (6181-6850)

F (6189-7423)



23.25  
29  
21.75



35.8  
26.2  
22.75

Color

颜色


Black

黑


4way

M (6181-6783)

F (6189-7409)



20.85  
19  
23.25



35.8  
17  
21.85

Color

颜色


Black

黑


12way

M (6181-6784)

F (6189-7410)



21.75  
38.2  
23.25



35.8  
35.4  
22.75

Color

颜色


Black

黑

# HX SEALED SERIES for STANDARD

2.3mm (090)

Structure / 构造

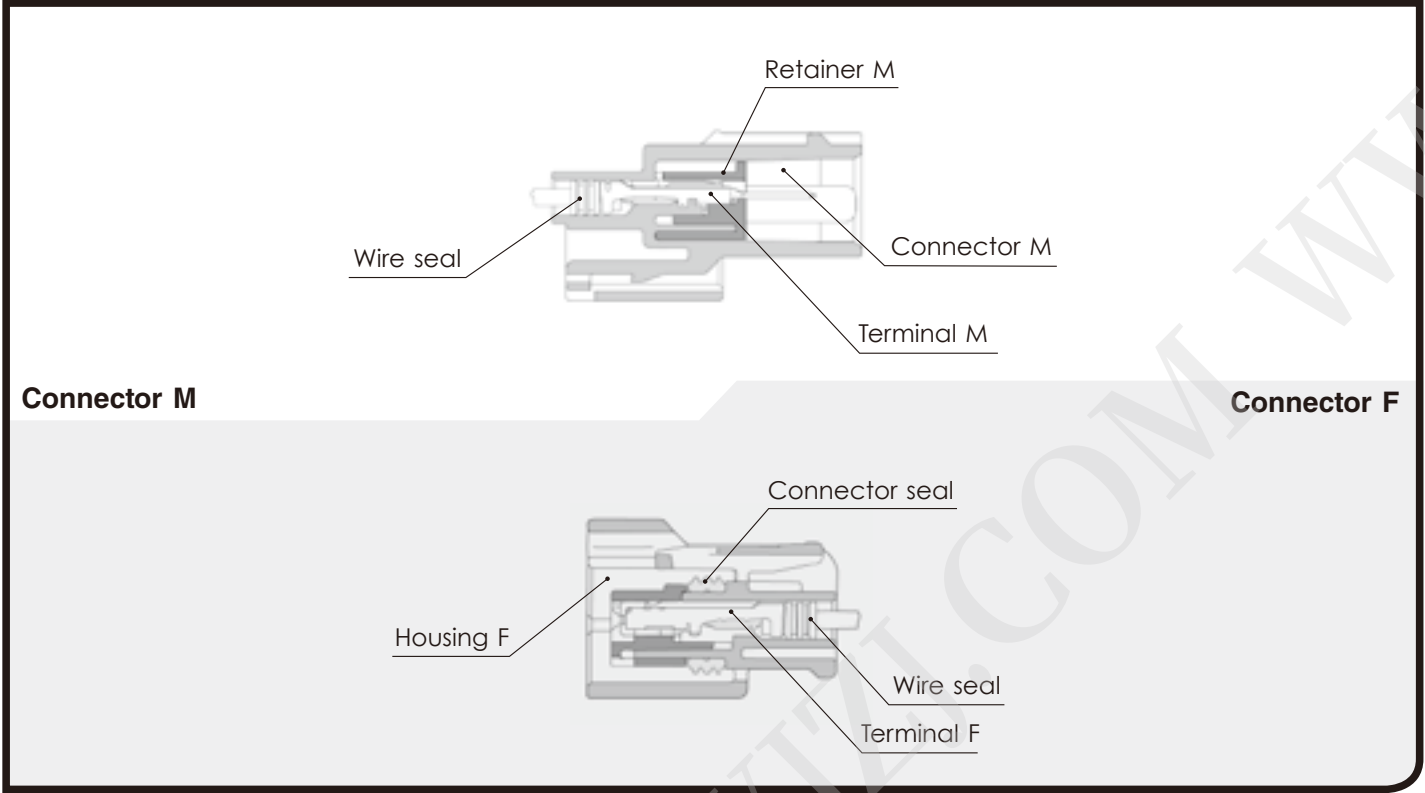

E-17

HX SEALED SERIES

2.3mm (090)

## Terminal (UNIT : mm)

端子 (毫米)

Ref; 2.3mm Terminal detail  
2.3mm端子参照页

|          |                      |      |
|----------|----------------------|------|
| <b>S</b> | <b>M (8230-4472)</b> | L-02 |
| <b>M</b> | <b>M (8230-4562)</b> | L-02 |
| <b>L</b> | <b>M (8230-4552)</b> | L-02 |

(S)

Cable size (mm<sup>2</sup>)  
适用电线大小

0.3~0.5

Cable overall diameter (mm)  
带绝缘层外径

1.4~2.4


Material  
材质

Heat-resistant  
copper alloy

Surface treatment  
表面处理


Tin-plated  
镀锡

F (8240-4862)




**(M)****F (8240-4992)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75~0.85                      |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.8~2.6                        |
| <b>Material</b><br>材质                        | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(L)****F (8240-4952)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 1.25~2.0                       |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 2.1~2.9                        |
| <b>Material</b><br>材质                        | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**2.3mm (090)****Wire seals (UNIT : mm)**


电线密封栓 (毫米)

The wire seals are common to M and F.


电线密封栓为公端、母端共用。

**(SS)****(7165-0385)**


|                                              |                            |
|----------------------------------------------|----------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | (AVSS/0.3~0.5) (AVSSX/0.5) |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.2~1.7                    |
| <b>Material</b><br>材质                        | Silicon<br>硅               |
| <b>Color</b><br>颜色                           | Gray<br>灰                  |

**(S)****(7165-0194)**

|                                              |                                                                                  |
|----------------------------------------------|----------------------------------------------------------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | (AV/0.5) (AVX/AEX/0.5~0.75) (AVS/0.3~0.85)<br>(AVSS/0.85~1.25) (AVSSX/0.75~1.25) |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 1.7~2.4                                                                          |
| <b>Material</b><br>材质                        | Silicon<br>硅                                                                     |
| <b>Color</b><br>颜色                           | Green<br>绿                                                                       |

**(M)****(7165-0198)**

|                                              |                                                                                       |
|----------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | (AV/0.5~1.25) (AVX/AEX/0.75~1.25) (AVS/0.85~1.25)<br>(AVSS/1.25~2.0) (AVSSX/1.25~2.0) |
| <b>Cable overall diameter (mm)</b><br>带绝缘层外径 | 2.1~2.9                                                                               |
| <b>Material</b><br>材质                        | Silicon<br>硅                                                                          |
| <b>Color</b><br>颜色                           | Yellow<br>黄                                                                           |

**2.3mm (090)****Dummy plugs (UNIT : mm)**

盲塞 (毫米)

Ref: 2.3mm Dummy plug detail  
2.3mm盲塞参照页**(7165-0193)** J-07

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

## 2.3mm (090)

### Housing (UNIT : mm)



接插件护套(毫米)

|                                 |      |
|---------------------------------|------|
| Ref: Terminal part No.<br>端子参照页 | E-17 |
| Ref: wire seal No.<br>电线密封栓参照页  | E-18 |
| Ref: Dummy plug No.<br>盲塞参照页    | J-07 |
| Material<br>材质                  | PBT  |

#### 1way

Color  
颜色



Black  
黑



Retainer No. (6918-2665)

#### M (6181-0803)

#### F (6189-0591)





Retainer No. (6918-1370)

Color  
颜色

Black  
黑

#### 2way

#### F (6189-0552)



Note)

Retainer No. (6918-1260)



Color  
颜色

Black  
黑

#### 2way

(Rib difference) (Rib差异)

#### F (6189-0593)



Note)



Retainer No. (6918-1260)

Color  
颜色

Brown  
棕

#### 3way

#### F (6189-0596)



Note)



Retainer No. (6918-1371)

Color  
颜色

Black  
黑

#### 4way

#### F (6189-0617)



Note)

Retainer No. (6918-1469)

Color  
颜色

Black  
黑

# HX SEALED SERIES

## for HYBRID

4.8mm (187)

### Terminal (UNIT : mm)

端子 (毫米)

Ref: 4.8mm Terminal detail  
4.8mm端子参照页

|   |               |      |
|---|---------------|------|
| S | M (8100-0463) | B-19 |
| M | M (8100-0464) | B-19 |
| L | M (8100-0465) | B-19 |
| F | F (8100-0468) | B-19 |

4.8mm (187)


### Wire seals (UNIT : mm)

电线密封栓 (毫米)

The wire seals are common to M and F.  
电线密封栓为公端、母端共用。

(S)


|                                         |                             |
|-----------------------------------------|-----------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.3~0.5                     |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.4~2.4                     |
| Material<br>材质                          | Heat-resistant copper alloy |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡            |



F (8100-0661)

(M)

|                                         |                             |
|-----------------------------------------|-----------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.5~1.25                    |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.6~2.6                     |
| Material<br>材质                          | Heat-resistant copper alloy |
| Surface treatment<br>表面处理               | Tin-plated<br>镀锡            |




M (8100-0660)

(S)

for 2.3mm, 4.8mm 10way

(7165-0172)

|                                         |                                               |
|-----------------------------------------|-----------------------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AVS/0.3) (AVSS/0.3~0.85)<br>(AVSSX/0.5~0.75) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.4~1.9                                       |
| Material<br>材质                          | NBR                                           |
| Color<br>颜色                             | Brown<br>棕                                    |




(M)

for 2.3mm, 4.8mm 10way

(7165-0130)

|                                         |                                                                                 |
|-----------------------------------------|---------------------------------------------------------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AV/0.5~1.25) (AVX/0.5~1.25) (AVS/0.3~1.25)<br>(AVSS/0.85~2.0) (AVSSX/0.75~2.0) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.8~2.9                                                                         |
| Material<br>材质                          | NBR                                                                             |
| Color<br>颜色                             | Gray<br>灰                                                                       |



(L)

for 2.3mm, 4.8mm 10way

(7165-0131)

Cable size (mm<sup>2</sup>) (AV/2.0~3.0) (AVX/2.0~3.0)  
适用电线大小 (AVS/2.0~3.0)

Cable overall diameter (mm) 3.0~4.1  
带绝缘层外径

Material NBR  
材 质

Color Black  
颜 色



(M)

for 1.0mm, 4.8mm 13way


(7165-0147)

Cable size (mm<sup>2</sup>) (AVS/0.3~1.25)  
适用电线大小

Cable overall diameter (mm) 1.8~2.9  
带绝缘层外径

Material Silicon  
材 质

Color Dark Green  
颜 色



(L)

for 1.0mm, 4.8mm 13way


(7165-0148)

Cable size (mm<sup>2</sup>) (AVS/2.0~3.0)  
适用电线大小

Cable overall diameter (mm) 3.0~4.1  
带绝缘层外径

Material Silicon  
材 质

Color Dark Blue  
颜 色



1.0mm, 4.8mm  
(040, 187)

## Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No. [1.0mm] E-02  
端子参照页 [4.8mm] E-20

Ref: wire seal No. [1.0mm] E-03  
电线密封栓参照页 [4.8mm] E-21



Ref: Dummy plug No. [1.0mm] E-04  
盲塞参照页 [4.8mm] B-21

Material PBT  
材 质

No. of way/ ( ) corresponds to 1.0mm, 4.8mm, in order from left to right.  
极数/ ( ) 内显示: 从左向右为1.0mm 极数、4.8mm 极数

13way (12+1)



Color Black  
颜 色



Retainer No. (6181-6465)

M (6181-6464)

F (6189-6863)



Retainer No. (6185-4596)

Color Black  
颜 色

1.5mm, 4.8mm  
(060, 187)

## Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No. [1.5mm] E-14  
端子参照页 [4.8mm] E-20

Ref: wire seal No. [1.5mm] E-15  
电线密封栓参照页 [4.8mm] E-20


Ref: Dummy plug No. [1.5mm] J-07  
盲塞参照页 [4.8mm] B-21

Material PBT  
材 质

No. of way/ ( ) corresponds to 1.5mm, 4.8mm, in order from left to right.  
极数/ ( ) 内显示: 从左向右为1.5mm 极数、4.8mm 极数


4way (2+2)

Color Black  
颜 色



M (6181-6785)

F (6189-7411)



Color Black  
颜 色



Sumitomo Wiring Systems, Ltd.


E-21

HX SEALED SERIES

## 5way (3+2)


Color  
颜色

Dark gray  
深灰



M (6181-6921)

F (6189-7567)



Color  
颜色

Dark gray  
深灰

2.3mm, 4.8mm  
(090, 187)

## Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No. [2.3mm] E-17  
端子参照页 [4.8mm] E-20

Ref: wire seal No. [2.3mm] E-18  
电线密封栓参照页 [4.8mm] E-21

Ref: Dummy plug No. [2.3mm] J-07  
盲塞参照页 [4.8mm] B-21


Material  
材质 PBT

No. of way/ ( ) corresponds to 2.3mm, 4.8mm, in order from left to right.  
极数/ ( ) 内显示: 从左向右为2.3mm 极数、4.8mm 极数


## 10way (8+2)

Color  
颜色

Dark gray  
深灰





Retainer No. (6918-1263)



M (6181-0381)

F (6189-0555)




Retainer No. (6918-1267)

Color  
颜色

Dark gray  
深灰

# NH SERIES

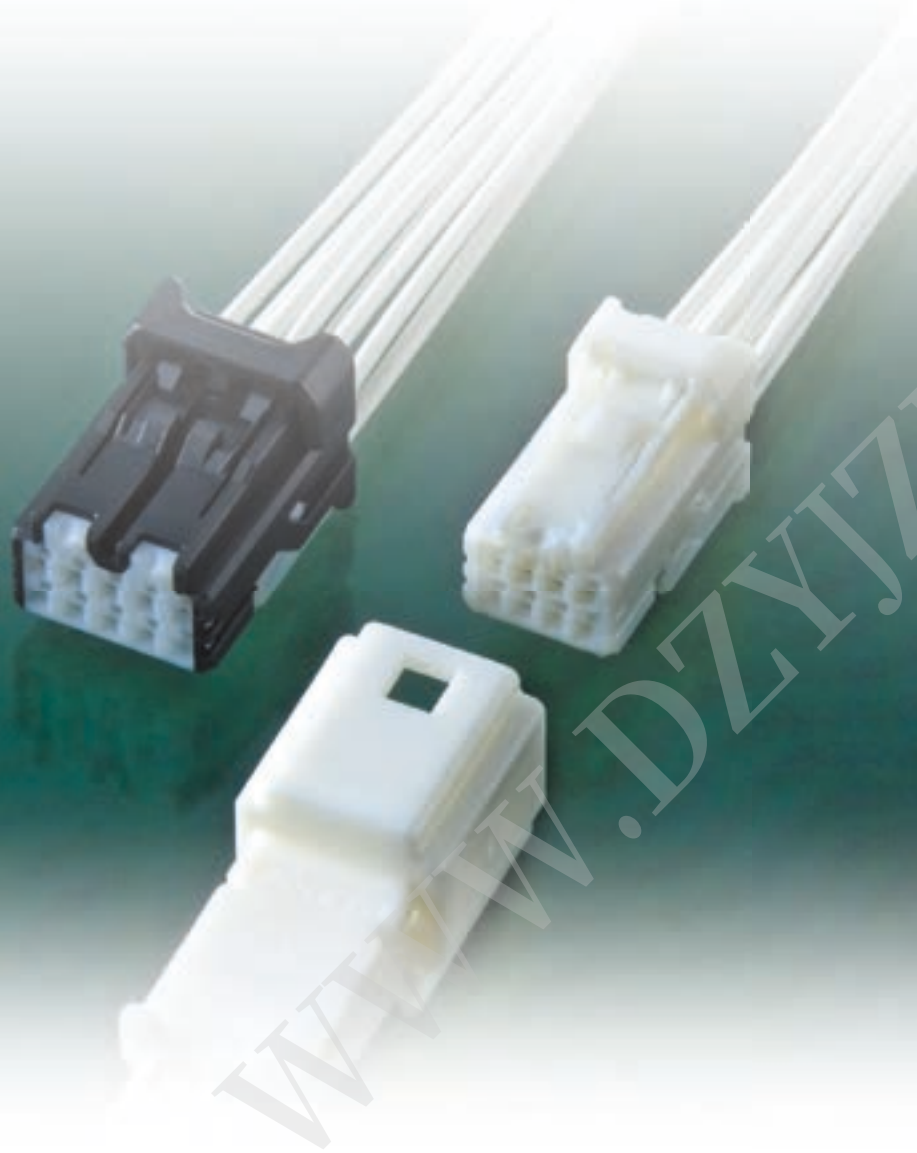

## Features

The NH series connector is a highly reliable for connector mating and terminal insertion. This series consist of 0.64mm and hybrid type(0.64mm+2.3mm) terminal usable for control circuit and low power circuit.

- The front mask of Female connector assists allure male terminal.
- By setting TPA (Terminal Position Assurance) adjust the incomplete inserted terminal to the correct position.
- An extra clip can be attached to the connector housing to secure it to the body.
- RoHS/ELV Compliant

## 特点

NH 系列在接插件嵌合或端子插入不足等方面提高了可信性。


端子尺寸由0.64mm 与混合型 (0.64mm+2.3mm) 构成，可以应用于信号回路与低功率回路。

- 母端接插件由于采用了前锁制，在接插件嵌合时提高了公端子的引导性。
- 未完全插入的端子能够通过锁片的安装插入到正确的位置。
- 接插件护套能够安装夹钉以固定在车体上。
- 可对应欧盟 RoHS 和 ELV 指令

# NH SERIES for STANDARD


0.64mm (025)

Structure / 构造

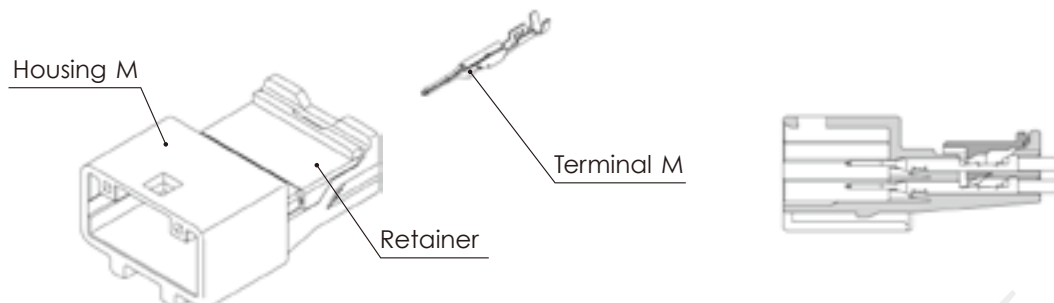

Connector M

Connector F

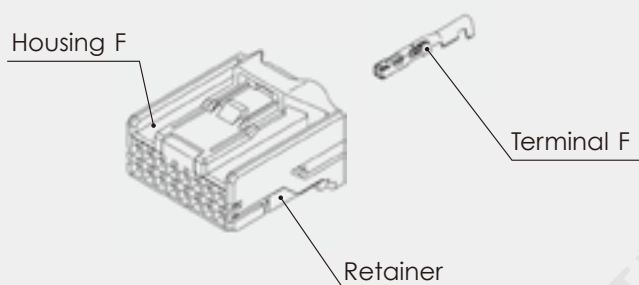


0.64mm (025)

Terminal (UNIT : mm)



端子(毫米)

**(S)**


|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.22~0.5         |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**(M)**

|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75             |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8230-5379)****F (8240-0552)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.22~0.5                       |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8230-5380)****F (8240-0523)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75                           |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**0.64mm (025)****Housing (UNIT : mm)**

接插件护套(毫米)

**Ref: Terminal part No.**  
端子参照页

F-02

**Material**  
材 质


PBT

**3way****F (6098-7063)**



**Color**  
颜 色

Natural  
自然色**4way**


**Color**  
颜 色

Natural  
自然色**8way**

**Color**  
颜 色

Natural  
自然色**M (6098-5310)** TH 04 MW-NH TH 04 FW-NH **F (6098-5267)**

**Color**  
颜 色

Natural  
自然色**M (6098-5271)** TH 08 MW-NH TH 08 FW-NH **F (6098-5269)**

**Color**  
颜 色

Natural  
自然色

Sumitomo Wiring Systems, Ltd.


F-03

NH SERIES

F-04

8way

TH 08 FB-NH **F (6098-6451)**



15.45  
21  
13

Color


颜色

Black

黑

8way

TH 08 FGY-NH **F (6098-6452)**



15.45  
21  
13

Color


颜色

Gray

灰

8way

TH 08 FL-NH **F (6098-6522)**



15.45  
21  
13

Color


颜色

Blue

蓝

8way

TH 08 FG-NH **F (6098-6523)**



15.45  
21  
13

Color


颜色

Green

绿

8way

TH 08 FW-1V-NH **F (6098-5312)**



10.5  
21  
21.8

Color


颜色

Natural

自然色

10way

TH 10 FB-NH **F (6098-5273)**



15.45  
21  
14.54

Color


颜色

Black

黑

10way

TH 10 FW-NH **F (6098-7066)**



15.45  
21  
16.54

Color


颜色

Natural

自然色

10way

TH 10 FGY-NH **F (6098-7067)**



15.45  
21  
16.54

Color

颜色

Gray

灰


12way

Color

颜色

Natural


自然色



15.1  
33.9  
18.6

12way

TH 12 FB-NH **F (6098-6455)**



15.45  
21  
17.4

Color


颜色

Black

黑

**M (6098-5277)** TH 12 MW-NH

TH 12 FW-NH **F (6098-5275)**



15.45  
21  
15.4

Color


颜色

Natural

自然色

12way

TH 12 FGY-NH **F (6098-6456)**




15.45  
21  
17.4

Color


颜色

Gray

灰

**12way**TH 12 FL-NH **F (6098-6457)**



|              |      |
|--------------|------|
| <b>Color</b> | Blue |
| 颜色           | 蓝    |

**12way**TH 12 FG-NH **F (6098-6524)**


|              |       |
|--------------|-------|
| <b>Color</b> | Green |
| 颜色           | 绿     |

**16way**


|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜色           | 自然色     |

**M (6098-5281)** TH 16 MW-NH      TH 16 FW-NH **F (6098-5279)**

|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜色           | 自然色     |

**16way**TH 16 FB-NH ASSY **F (6098-7099)**



|              |       |
|--------------|-------|
| <b>Color</b> | Black |
| 颜色           | 黑     |

**16way**TH 16 FGY-NH ASSY **F (6098-7100)**


|              |      |
|--------------|------|
| <b>Color</b> | Gray |
| 颜色           | 灰    |

**24way**


|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜色           | 自然色     |

**M (6098-5285)** TH 24 MW-NH      TH 24 FW-NH **F (6098-5283)**

|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜色           | 自然色     |

**24way**TH 24 FB-NH **F (6098-7060)**

|              |       |
|--------------|-------|
| <b>Color</b> | Black |
| 颜色           | 黑     |

**24way**TH 24 FGY-NH **F (6098-7061)**

|              |      |
|--------------|------|
| <b>Color</b> | Gray |
| 颜色           | 灰    |


**F-05**

NH SERIES


### 32way

Color  
颜色

Natural  
自然色



**M (6098-5289)** TH 32 MW-NH    TH 32 FW-NH **F (6098-5287)**




Color  
颜色

Natural  
自然色


### 40way

Color  
颜色

Natural  
自然色



**M (6098-5585)** TH 40 MW-NH    TH 40 FW-NH **F (6098-5291)**




Color  
颜色

Natural  
自然色

### 40way

TH 40 FB-NH **F (6098-5293)**




Color  
颜色

Black  
黑

### 40way

TH 40 FG-NH **F (6098-5295)**




Color  
颜色

Gray  
灰

### 40way

TH 40 FG-NH **F (6098-5297)**



Color  
颜色

Green  
绿

# NH SERIES for HYBRID

F-07

NH SERIES

2.3mm (090)

## Terminal (UNIT : mm)


端子(毫米)

(S)

Cable size (mm<sup>2</sup>)  
适用电线大小 0.3~0.5


Material  
材 质 Brass  
黄铜

Surface treatment  
表面处理 Tin-plated  
镀锡



M (8230-5169)

F (8240-0368)



Cable size (mm<sup>2</sup>)  
适用电线大小 0.3~0.5

Material  
材 质 Heat-resistant  
copper alloy


Surface treatment  
表面处理 Tin-plated  
镀锡

(SS)

Cable size (mm<sup>2</sup>)  
适用电线大小 0.22


Material  
材 质 Brass  
黄铜

Surface treatment  
表面处理 Tin-plated  
镀锡



M (8230-5168)

F (8240-0367)



Cable size (mm<sup>2</sup>)  
适用电线大小 0.22

Material  
材 质 Heat-resistant  
copper alloy


Surface treatment  
表面处理 Tin-plated  
镀锡

(M)

Cable size (mm<sup>2</sup>)  
适用电线大小 0.75~1.0


Material  
材 质 Brass  
黄铜

Surface treatment  
表面处理 Tin-plated  
镀锡



M (8230-5170)

F (8240-0369)




Cable size (mm<sup>2</sup>)  
适用电线大小 0.75~1.0

Material  
材 质 Heat-resistant  
copper alloy



Surface treatment  
表面处理 Tin-plated  
镀锡

**(L)**


|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 1.25             |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**(LL)**

|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0~2.5          |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8230-5171)****F (8240-0370)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 1.25                           |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8230-5172)****F (8240-0371)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0~2.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**0.64mm, 2.3mm**  
**(025, 090)**

## Housing (UNIT : mm)

接插件护套(毫米)

|                               |          |      |
|-------------------------------|----------|------|
| <b>Ref: Terminal part No.</b> | [0.64mm] | F-03 |
| 端子参照页                         | [2.3mm]  | F-07 |

|                 |     |
|-----------------|-----|
| <b>Material</b> | PBT |
| 材 质             |     |



No. of way/ ( ) corresponds to 0.64mm, 2.3mm, in order from left to right.  
极数 / ( ) 内显示: 从左向右为0.64mm 极数、2.3mm 极数

**20way (18+2)**NH 18 FW-CS2 **F (6098-7261)**

|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜 色          | 自然色     |

**20way (10+10)**



|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜 色          | 自然色     |

**M (6098-5989)** NH 10 MW-CS10 NH 10 FW-CS10 **F (6098-5988)**

|              |         |
|--------------|---------|
| <b>Color</b> | Natural |
| 颜 色          | 自然色     |


**20way (10+10)**

|              |       |
|--------------|-------|
| <b>Color</b> | Black |
| 颜 色          | 黑     |

**M (6098-7254)** NH 10 MW-CS10-B NH 10 FW-CS10-B **F (6098-7253)**

|              |       |
|--------------|-------|
| <b>Color</b> | Black |
| 颜 色          | 黑     |

# RS SERIES

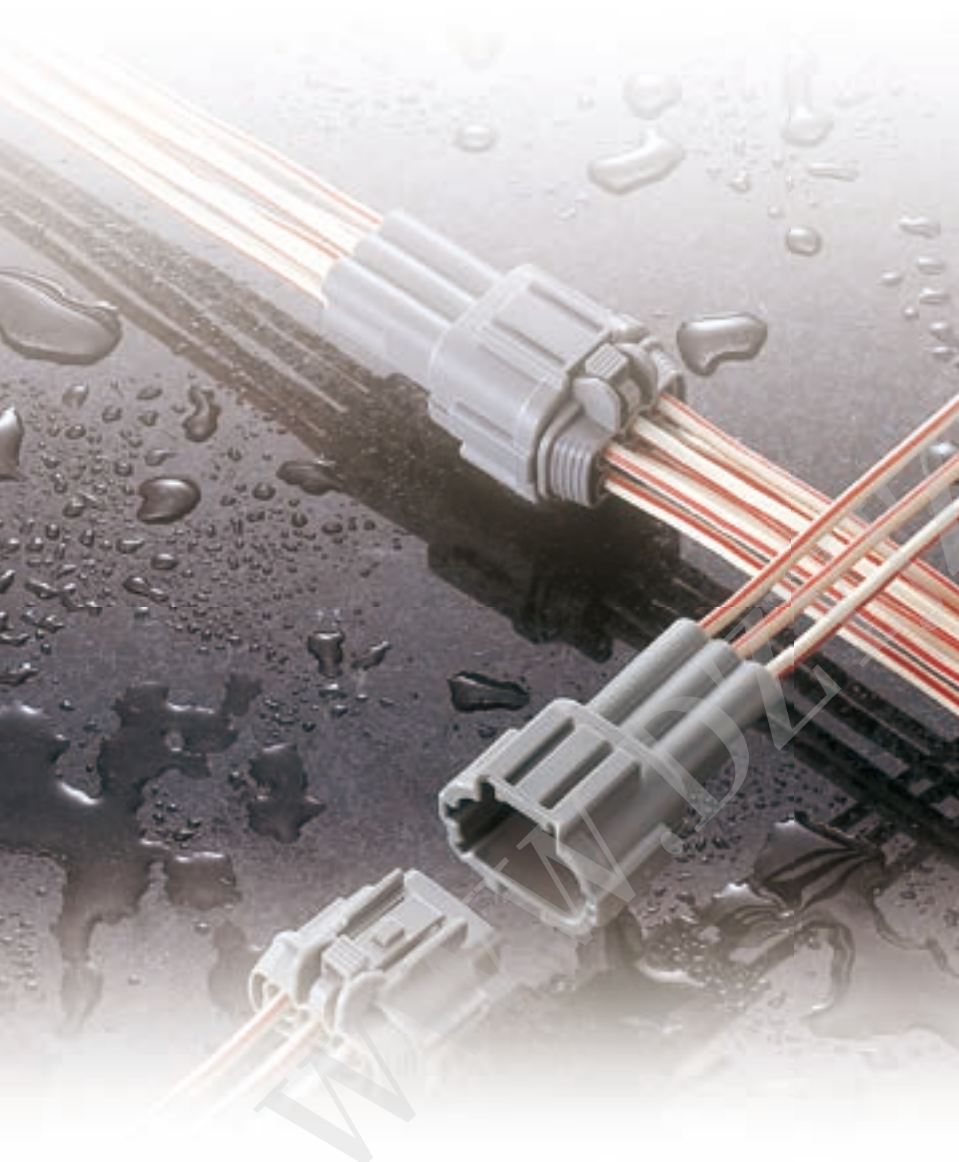

## Features

RS series consists of a 2.3mm type classified according to terminal size, supporting use in a variety of control circuits and low power circuits.

- The RS-standard type connectors adopt an inertia locking system to prevent semi-engagement (this system is not incorporated in some connectors).

\*Please contact our sales representative for product numbers.

- RoHS/ELV Compliant

## 特点

RS 系列的端子尺寸由2.3mm 构成，可以应用于各种控制回路与低功率回路。


- RS 标准类型接插件采用惯性锁闭方式，使接插件不易发生半插入。
- 可对应欧盟 RoHS 和 ELV 指令

# RS SERIES for STANDARD Type1

2.3mm (090)

Structure / 构造

G-02

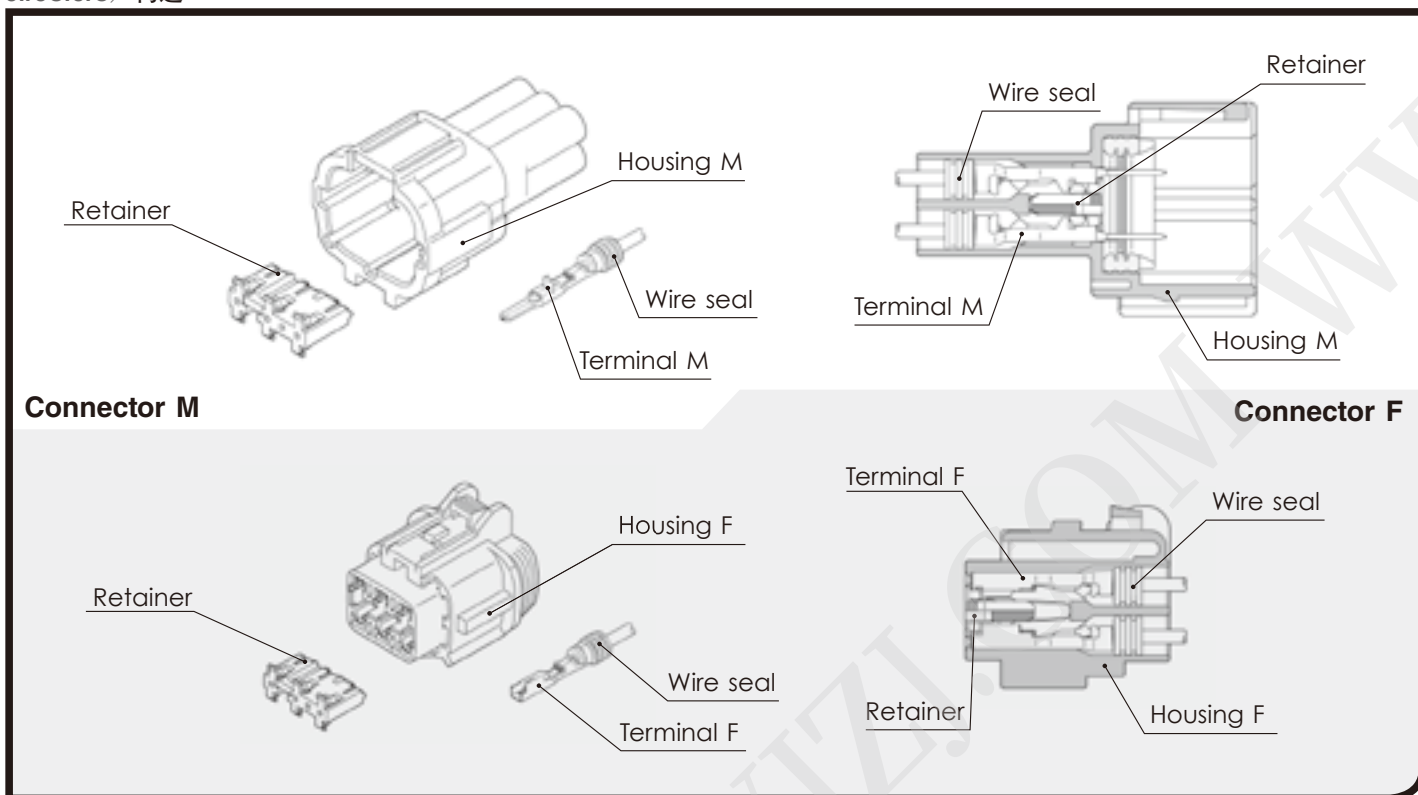



2.3mm (090)

**Terminal** (UNIT : mm)

端子(毫米)

**(S)**



|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5          |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8100-3803)****F (8240-0263)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(S)****Au**



|                                              |                   |
|----------------------------------------------|-------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5           |
| <b>Material</b><br>材 质                       | Brass<br>黄铜       |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金 |

**M (8100-3805)****F (8240-0266)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**(M)**



|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.85~1.25        |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8100-3804)****F (8240-0264)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.85~1.25                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(M)****Au**



|                                              |                   |
|----------------------------------------------|-------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.85~1.25         |
| <b>Material</b><br>材 质                       | Brass<br>黄铜       |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金 |

**M (8100-3806)****F (8240-0267)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.85~1.25                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**(L)**



|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0              |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8100-4172)****F (8240-0265)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0                            |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(L)****Au**

|                                              |                   |
|----------------------------------------------|-------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0               |
| <b>Material</b><br>材 质                       | Brass<br>黄铜       |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金 |

**M (8100-4173)****F (8240-0268)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0                            |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**G-03**

RS SERIES

## 2.3mm (090)

### Wire seals (UNIT : mm)

电线密封栓(毫米)

The wire seals are common to M and F.

电线密封栓为公端、母端共用。

(M)

(7165-0472)

|                                         |              |
|-----------------------------------------|--------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AVSS/1.25)  |
| Cable overall diameter (mm)<br>带绝缘层外径   | 2.0~2.4      |
| Material<br>材质                          | Silicon<br>硅 |
| Color<br>颜色                             | Violet<br>紫  |



(US)

(7165-0474)


|                                         |                            |
|-----------------------------------------|----------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AVSS/0.3) (CAVUS/0.3~0.5) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.0~1.4                    |
| Material<br>材质                          | Silicon<br>硅               |
| Color<br>颜色                             | Orange<br>橙                |



(S)

(7165-0473)

|                                         |                                      |
|-----------------------------------------|--------------------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AVSS/0.5~0.85)<br>(CAVUS/0.85~1.25) |
| Cable overall diameter (mm)<br>带绝缘层外径   | 1.5~1.9                              |
| Material<br>材质                          | Silicon<br>硅                         |
| Color<br>颜色                             | Light Blue<br>淡蓝                     |



(L)

(7165-0471)

|                                         |                   |
|-----------------------------------------|-------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | (AVSS/2.0)        |
| Cable overall diameter (mm)<br>带绝缘层外径   | 2.5~2.9           |
| Material<br>材质                          | Silicon<br>硅      |
| Color<br>颜色                             | Light Green<br>淡绿 |



## 2.3mm (090)


### Dummy plugs (UNIT : mm)

盲塞(毫米)

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

(7165-1131)

|                |              |
|----------------|--------------|
| Material<br>材质 | Silicon<br>硅 |
| Color<br>颜色    | Blue<br>蓝    |



## 2.3mm (090)

### Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No.  
端子参照页 G-02

Ref: wire seal No.  
电线密封栓参照页 G-04



Ref: Dummy plug No.  
盲塞参照页 G-04

Material  
材质 PBT

※ Detail dimensions for mounting portion of the bracket are specified in the official drawing.  
Please contact our sales staff.

※关于固定用支架相关事宜， 请向敝公司销售负责人问讯。



### 1way



Retainer No. (6918-1773)



**M (6188-0551)** RS 01 MB

RS 01 FB **F (6185-0862)**



Retainer No. (6918-1773)



### 2way



Retainer No. (6918-1774)



**M (6188-0554)** RS 02 MGY

RS 02 FGY **F (6185-0867)**



Retainer No. (6918-1774)



### 2way



Retainer No. (6918-1774)



**M (6188-0552)** RS 02 MB

RS 02 FB **F (6185-0865)**



Retainer No. (6918-1774)

### 2way

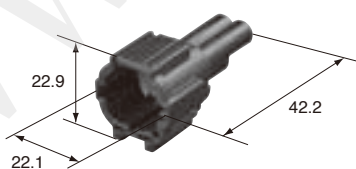



Retainer No. (6918-1774)

**M (6188-0553)** RS 02 MBR

**M (6188-0663)** RS 02 MBR-DGY



RS 02 FBR **F (6185-0866)**

RS 02 FBR-DGY **F (6185-1101)**



Retainer No. (6918-1774)



### 3way



Retainer No. (6918-1775)



**M (6188-0556)** RS 03 MGY

RS 03 FGY **F (6185-0869)**



Retainer No. (6918-1775)


### 3way



Retainer No. (6918-1775)



**M (6188-0555)** RS 03 MB

RS 03 FB **F (6185-0868)**



Retainer No. (6918-1775)



### 4way



Retainer No. (6918-1776)



**M (6188-0558)** RS 04 MGY

RS 04 FGY-PR **F (6185-1171)**



Retainer No. (6918-1776)



### 4way



Retainer No. (6918-1776)



**M (6188-0557)** RS 04 MB

RS 04 FB-PR **F (6185-1169)**



Retainer No. (6918-1776)



### 6way



Retainer No. (6918-1779)



**M (6188-5540)** RS 06 MGY

RS 06 FGY-PR **F (6185-5177)**



Retainer No. (6918-1779)



### 6way



Retainer No. (6918-1779)



**M (6188-5539)** RS 06 MB

RS 06 FB-PR **F (6185-5175)**



Retainer No. (6918-1779)


### 8way



Retainer No. (6918-1780)



**M (6188-5544)** RS 08 MGY-PR

RS 08 FGY-PR **F (6185-5181)**



Retainer No. (6918-1780)



## 8way



Retainer No. (6918-1780)

**M (6188-5542)** RS 08 MB-PR

RS 08 FB-PR **F (6185-5179)**



Retainer No. (6918-1780)


G-07

RS SERIES


# RS SERIES for STANDARD Type2

## 2.3mm (090)


### Structure / 构造

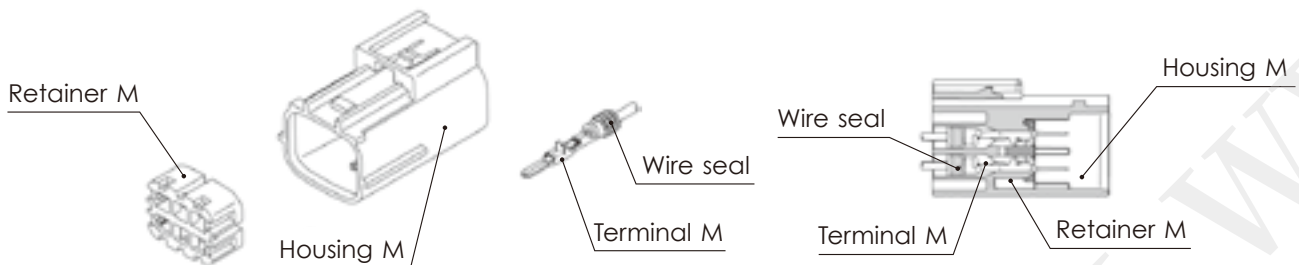

### Connector M

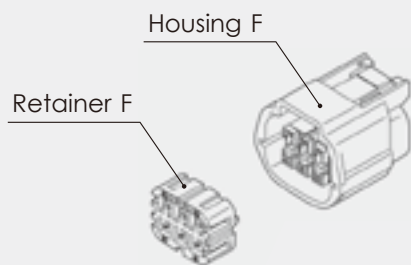

### Connector F

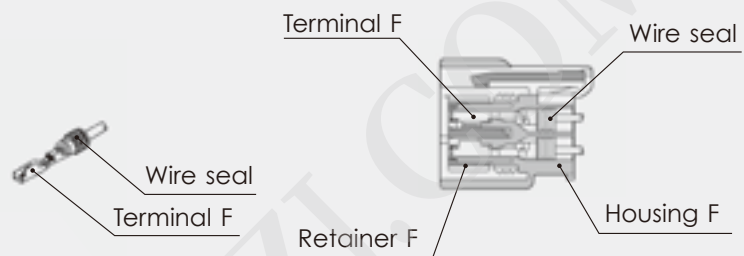

## 2.3mm (090)

### Housing (UNIT : mm)

接插件护套(毫米)


Ref: Terminal part No. G-02  
端子参照页

Ref: wire seal No. G-04  
电线密封栓参照页

Ref: Dummy plug No. G-04  
盲塞参照页

Material PBT  
材质


### 2way



Retainer No. (6918-1653)



**M (6181-0515)** RS 02 MSB

**M (6181-0670)** RS 02 MSB-B




RS 02 FSB **F (6189-0951)**

RS 02 FSB-B **F (6189-1107)**



Retainer No. (6918-1651)



## 2way



Retainer No. (6918-1653)


**M (6181-0532)** RS 02 MLGY

RS 02 FLGY **F (6189-0950)**



Retainer No. (6918-1651)


## 3way





Retainer No. (6918-1654)

**M (6181-0516)** RS 03 MSB

**M (6181-0671)** RS 03 MSB-GY




RS 03 FSB **F (6189-0928)**  
RS 03 FSB-GY **F (6189-1104)**



Retainer No. (6918-1652)

## 4way





Retainer No. (6918-1598)

**M (6181-0513)** RS 04 MG

**M (6181-0668)** RS 04 MG-GY


RS 04 FG **F (6189-7756)**

RS 04 FG-GY **F (6189-7757)**



Retainer No. (6918-1599)

## 4way




Retainer No. (6918-1598)

**M (6181-0514)** RS 04 ML

**M (6181-0669)** RS 04 ML-B


RS 04 FL **F (6189-7758)**

RS 04 FL-B **F (6189-7759)**



Retainer No. (6918-1599)

## 6way




Retainer No. (6918-1600)

**M (6181-0511)** RS 06 MG

**M (6181-0665)** RS 06 MG-DGY


RS 06 FG **F (6189-7760)**

RS 06 FG-DGY **F (6189-7761)**



Retainer No. (6918-1601)

## 6way





Retainer No. (6918-1600)

**M (6181-0536)** RS 06 ML

**M (6181-0664)** RS 06 ML-B

RS 06 FL **F (6189-7762)**

RS 06 FL-B **F (6189-7763)**




Retainer No. (6918-1601)


G-09

RS SERIES

8way



Retainer No. (6918-1602)





**M (6181-0512)** RS 08 MG

**M (6181-0667)** RS 08 MG-GY


RS 08 FG **F (6189-0954)**

RS 08 FG-GY **F (6189-1108)**




Retainer No. (6918-1603)

8way



Retainer No. (6918-1602)





**M (6181-0522)** RS 08 ML

**M (6181-0666)** RS 08 ML-B

RS 08 FL **F (6189-0955)**

RS 08 FL-B **F (6189-1109)**




Retainer No. (6918-1603)

# RS SERIES for E-RS

## 2.3mm (090)

### Structure / 构造

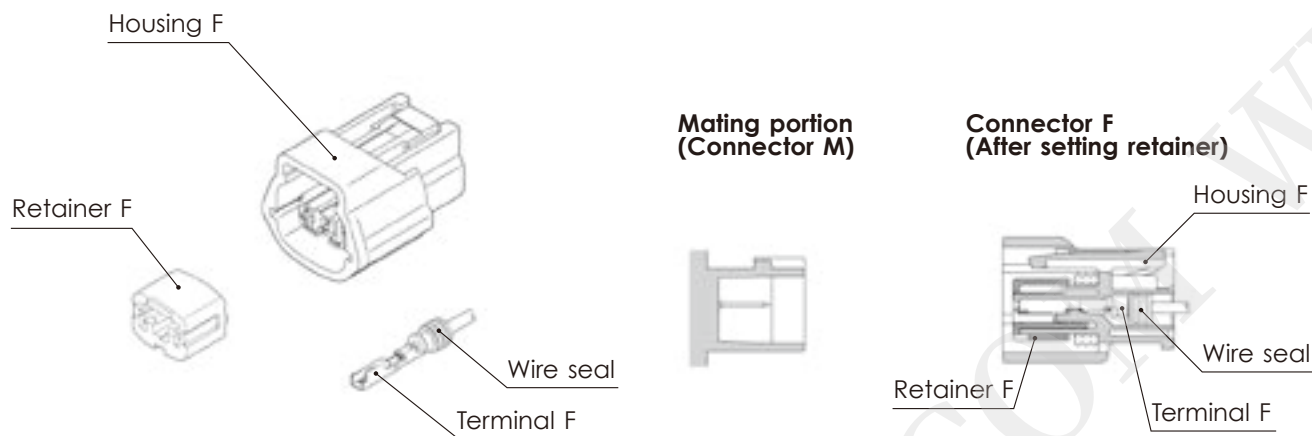

G-11

RS SERIES

## 2.3mm (090)

### Housing (UNIT : mm)

接插件护套 (毫米)

Ref: Terminal part No. G-02  
端子参照页



Ref: wire seal No. G-04  
电线密封栓参照页

Ref: Dummy plug No. G-04  
盲塞参照页

Material PBT  
材 质

#### 1way



E 01 FG-Y-RS **F (6098-2329)**



Retainer No. (6918-1636)

#### 2way



E 02 FG-Y-RS **F (6189-0772)**



Retainer No. (6918-1594)

**2way**



E 02 FB-RS **F(6189-0773)**



Retainer No.(6918-1594)

**2way**


E 02 FBR-RS **F(6189-0774)**  
E 02 FBR-RS-GY **F(6189-1093)**



Retainer No.(6918-1594)

**2way**


E 02 FG-RS **F(6189-0775)**  
E 02 FG-RS-LGY **F(6189-1094)**



Retainer No.(6918-1594)

**2way**


E 02 FR-RS **F(6189-0776)**  
E 02 FR-RS-GY **F(6189-1095)**



Retainer No.(6918-1594)

**2way**


E 02 FL-RS **F(6189-0777)**  
E 02 FL-RS-LGY **F(6189-1096)**



Retainer No.(6918-1594)

**2way**



E 02 FPU-RS **F(6189-0778)**  
E 02 FPU-RS-B **F(6189-1097)**



Retainer No.(6918-1594)

**3way**


E 03 FGY-RS **F(6189-7471)**



Retainer No.(6918-1595)

**3way**


E 03 FBR-RS **F(6189-7710)**  
E 03 FBR-RS-B **F(6189-7711)**



Retainer No.(6918-1595)

**4way**


E 04 FGY-RS **F(6189-7469)**



Retainer No.(6918-1596)

**4way**


E 04 FBR-RS **F(6189-7713)**  
E 04 FBR-RS-LGY **F(6189-7714)**



Retainer No.(6918-1596)

**5way**


E 05 FGY-RS **F(6189-7470)**



Retainer No.(6918-1604)

**5way**



E 05 FBR-RS **F(6189-7716)**  
E 05 FBR-RS-B **F(6189-7717)**



Retainer No.(6918-1604)

6way

E 06 FGY-RS **F (6189-7393)**



Retainer No. (6918-1597)

G-13

RS SERIES



# TL SEALED SERIES

The image shows three black plastic connectors with blue wires, arranged diagonally on a rough, grey stone surface. The connectors are of the TL Sealed Series, featuring a locking mechanism. The wires are bundled together and extend from the connectors. The background is a soft, out-of-focus light blue and white.

## Features

The TL sealed connector series has a mechanism that detects terminal incomplete insertion by using a dedicated jig.

This series consists of 2.3mm type supporting use in a variety of control circuits and low power circuits.

- To restrain from incomplete engagement, this series is adopted a lock mechanism with effective clear sound.
- These male connectors can be directly secured to a bracket on the car body.  
(Note: Please contact our sales staff, if you have any questions regarding the dedicated jig.)
- RoHS/ELV Compliant

## 特点

TL 防水系列采用了以专用治具检测出端子半插入的构造。

TL 系列的端子尺寸由2.3mm 构成，可以应用于各种控制回路与低功率回路。

- 为防止接插件半嵌合的发生，采用了增强锁闭音的锁闭构造。
- 公端接插件可以直接固定在车体支架上。

注意：有关专用导通治具的详情请向敝公司销售负责人确认。


- 可对应欧盟 RoHS 和 ELV 指令

# TL SEALED SERIES for STANDARD

## 2.3mm (090)

Structure / 构造

H-02

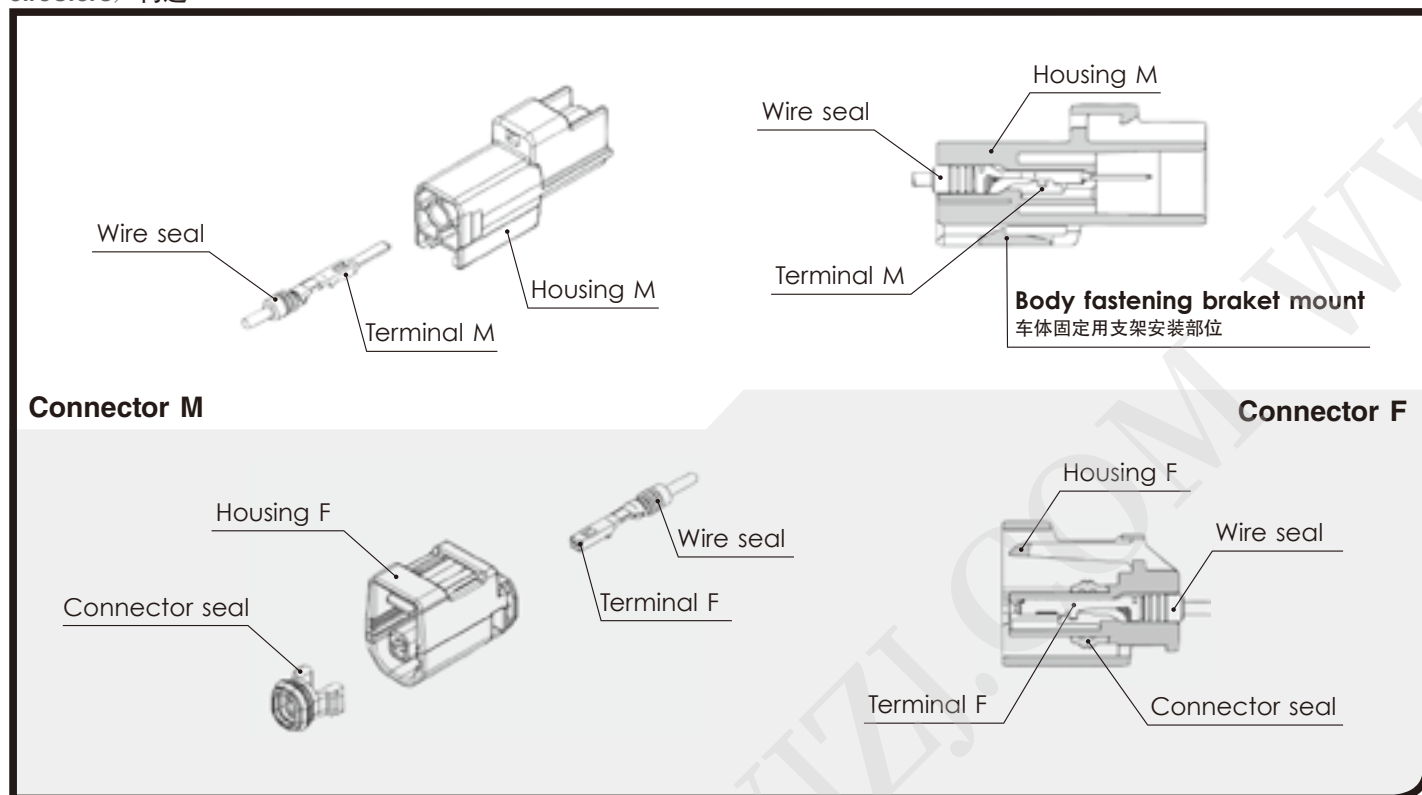

### 2.3mm (090)

## Terminal (UNIT : mm)

端子 (毫米)

Ref; 2.3mm Terminal detail  
2.3mm端子参照页

|          |                      |      |                      |      |
|----------|----------------------|------|----------------------|------|
| <b>S</b> | <b>M (8230-4472)</b> | L-02 | <b>F (8100-1427)</b> | L-02 |
| <b>M</b> | <b>M (8230-4562)</b> | L-02 | <b>F (8100-1429)</b> | L-02 |
| <b>L</b> | <b>M (8230-4552)</b> | L-02 | <b>F (8100-1428)</b> | L-02 |

### 2.3mm (090)

## Wire seals (UNIT : mm)

电线密封栓 (毫米)

Ref; 2.3mm Wire Seals detail  
2.3mm电线密封栓参照页

|                      |      |
|----------------------|------|
| <b>S (7165-0516)</b> | J-06 |
| <b>M (7165-0515)</b> | J-06 |
| <b>L (7165-0514)</b> | J-06 |

## 2.3mm (090)

### Dummy plugs (UNIT : mm)

盲塞 (毫米)

Ref; 2.3mm Dummy plug detail  
2.3mm盲塞参照页

(7165-0193) J-07

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

## 2.3mm (090)

### Housing (UNIT : mm)

接插件护套 (毫米)

Ref: Terminal part No. L-02  
端子参照页


Ref: wire seal No. J-06  
电线密封栓参照页

Ref: Dummy plug No. J-07  
盲塞参照页

Material PBT  
材 质


#### 1way

Color Black  
颜 色



M (6181-6658)


F (6189-7214)



Color Black  
颜 色

#### 2way


F (6189-7189)



Color Black  
颜 色

#### 4way


F (6189-7188)



Color Black  
颜 色

#### 5way

F (6189-7190)




Color Black  
颜 色

H-03

TL SEALED SERIES



# SL SERIES

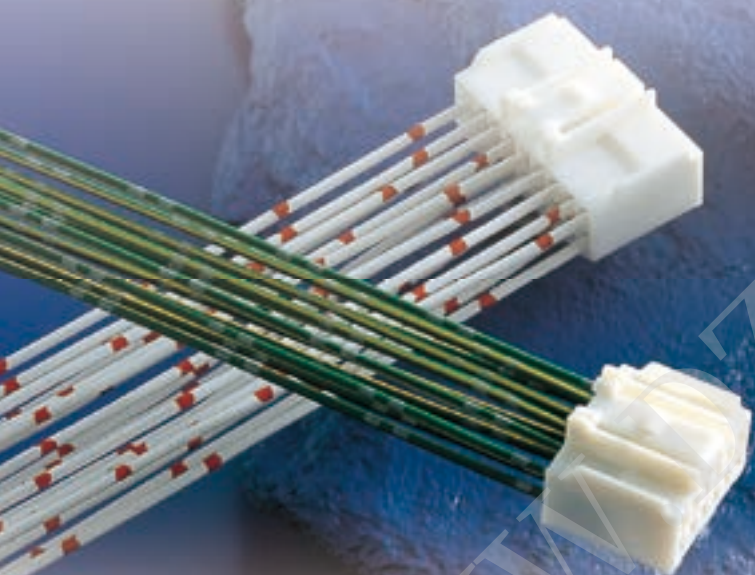

## Features

The SL connector series is adopted a mechanism that detects terminal incomplete insertion by using a dedicated jig.

This series consists of 1.5mm, 2.3mm and 2.8mm types classified according to the terminal size, covering an extensive array of applications from signal circuits to low power circuits.

- These connectors can be directly secured to a bracket on the car body. In addition, an extra clip can be attached to the connector to secure it to the car body. (Note: Please contact our sales staff, if you have any questions regarding the dedicated jig.)
- RoHS/ELV Compliant

## 特点

SL 系列接插件采用了以专用治具检测端子半插入的构造。

按照端子尺寸划分为1.5mm·2.3mm·2.8mm 类型，从信号回路到电源回路，能广泛运用。

- 接插件可以直接固定在车体的支架上。还可以在接插件上安装用于固定到车体上的卡钉（卡子）。



注意：有关专用导通治具的详情请向敝公司销售负责人确认。

- 可对应欧盟 RoHS 和 ELV 指令

# SL SERIES for STANDARD



## 1.5mm (060)

Structure / 构造

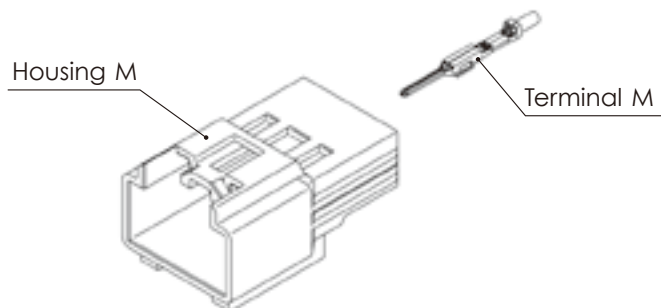

Connector M

Connector F

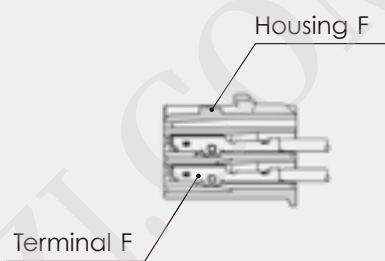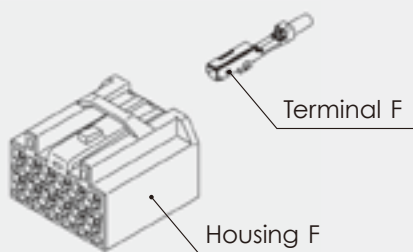

1.5mm (060)

### Terminal (UNIT : mm)



端子(毫米)

Note) L size terminal can be used for 14 poled connectors with insertion cavity specified.  
For details please contact our sales staff.

※ L 尺寸端子的可用接插件有限制。  
务必向敝公司销售负责人问讯。

**(S)**



|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3382)****F (8100-3391)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(S)****Au**



|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**M (8230-4883)****F (8240-0135)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**(M)**



|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75, 0.85~1.25                |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3383)****F (8100-3392)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75, 0.85~1.25                |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(L)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0                            |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3384)****F (8100-3393)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0                            |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**1.5mm (060)****Housing** (UNIT : mm)

接插件护套(毫米)

**Ref: Terminal part No.**  
端子参照页


I-02

**Material**  
材 质

PBT

Note) Connector can be used together with 2mm<sup>2</sup> wire are 14 poled connectors.  
For details of each product, please contact our sales staff.

※ L 尺寸端子的可用接插件有限制。  
务必向敝公司销售负责人问讯。

**4way****F (6098-3456)**


**Color**  
颜 色

Natural  
自然色

### 12way


Color  
颜色

Natural  
自然色



### 12way

**F (6098-4876)**




Color  
颜色

Natural  
自然色

**M (6098-3449)**

**F (6098-8482)**




Color  
颜色

Natural  
自然色

### 14way

**F (6098-4877)**

Note)




Color  
颜色

Natural  
自然色

### 16way

**F (6098-3453)**




Color  
颜色

Natural  
自然色

# SL SERIES for STANDARD

2.3mm (090)

Structure / 构造

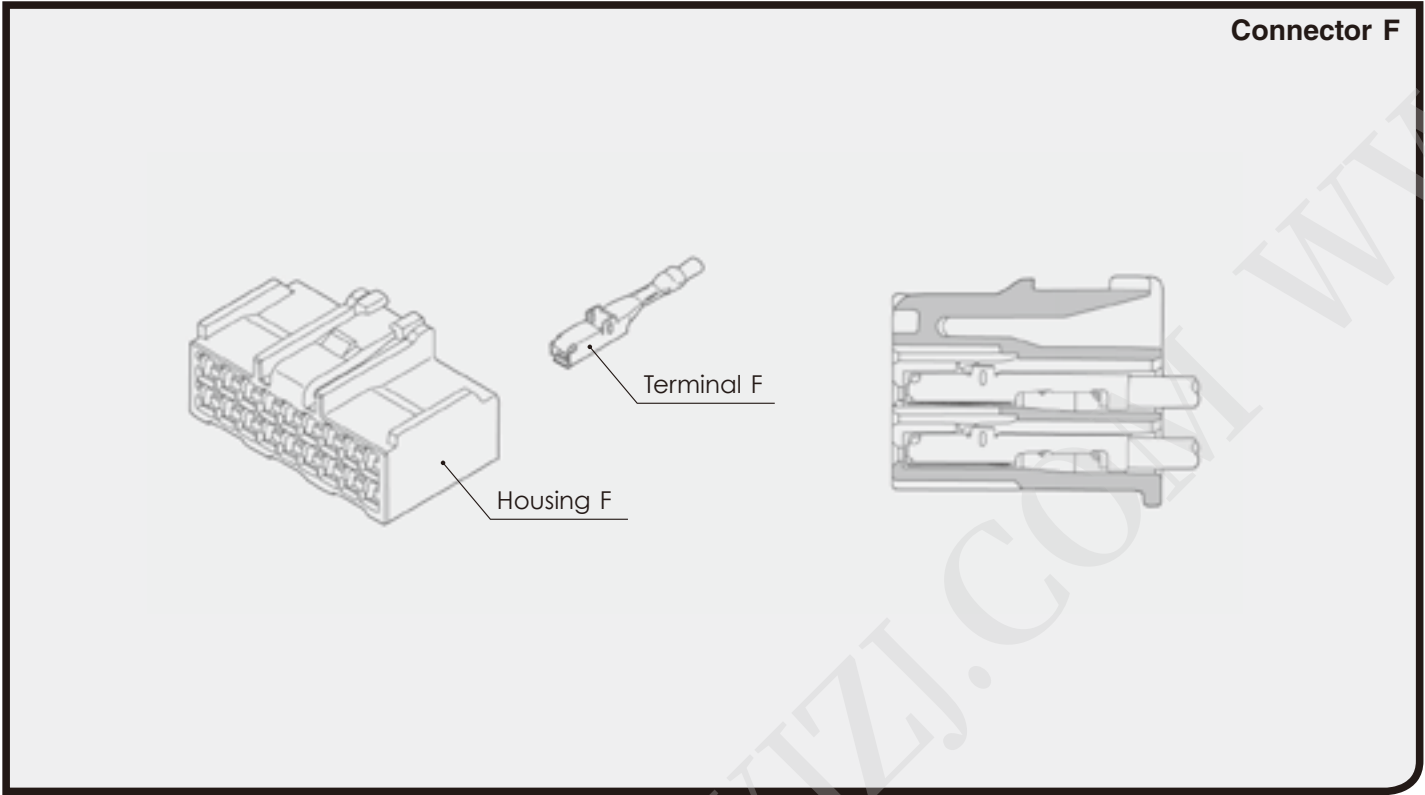

Connector F

I- 05

SL SERIES

## 2.3mm (090)

### Terminal (UNIT : mm)

端子(毫米)

Ref; 2.3mm Terminal detail  
2.3mm端子参照页

|          |                      |      |                      |      |
|----------|----------------------|------|----------------------|------|
| <b>S</b> | <b>M (8230-4492)</b> | A-10 | <b>F (8240-4882)</b> | A-10 |
| <b>M</b> | <b>M (8230-4502)</b> | A-10 | <b>F (8240-4892)</b> | A-10 |
| <b>L</b> | <b>M (8230-4512)</b> | A-10 | <b>F (8240-4942)</b> | A-10 |

Regarding "Gold-plated Terminal", please refer "A-10".  
镀金端子记载在A-10上

2.3mm (090)

Housing (UNIT : mm)

接插件护套(毫米)


Ref: Terminal part No. A-10  
端子参照页

Material PBT  
材 质

I- 06

2way


F (6240-5337)



Color Natural  
颜 色 自然色

4way


F (6098-8478)



Color Natural  
颜 色 自然色

6way

F (6240-5339)



Color Natural  
颜 色 自然色

6way

Color Natural  
颜 色 自然色  
Note With body fastening clamp  
备 注 带防转卡钉





Plate thickness range for clamp :  
t=0.6~2.0mm  
Hole=7.2mm×12mm

M (6098-2679)


F (6098-2680)



Color Natural  
颜 色 自然色

12way


F (6098-1714)



Color Natural  
颜 色 自然色

14way


F (6098-1747)



Color Natural  
颜 色 自然色

14way


F (6098-2101)



Color Natural  
颜 色 自然色

14way

F (6098-1774)




Color Black  
颜 色 黑

## 16way


Color  
颜色

Natural  
自然色



**M (6098-1744)**

**F (6098-1746)**




Color  
颜色

Natural  
自然色

## 18way

**F (6098-1627)**




Color  
颜色

Natural  
自然色

# SL SERIES for STANDARD

## 2.8mm (110)

Structure / 构造

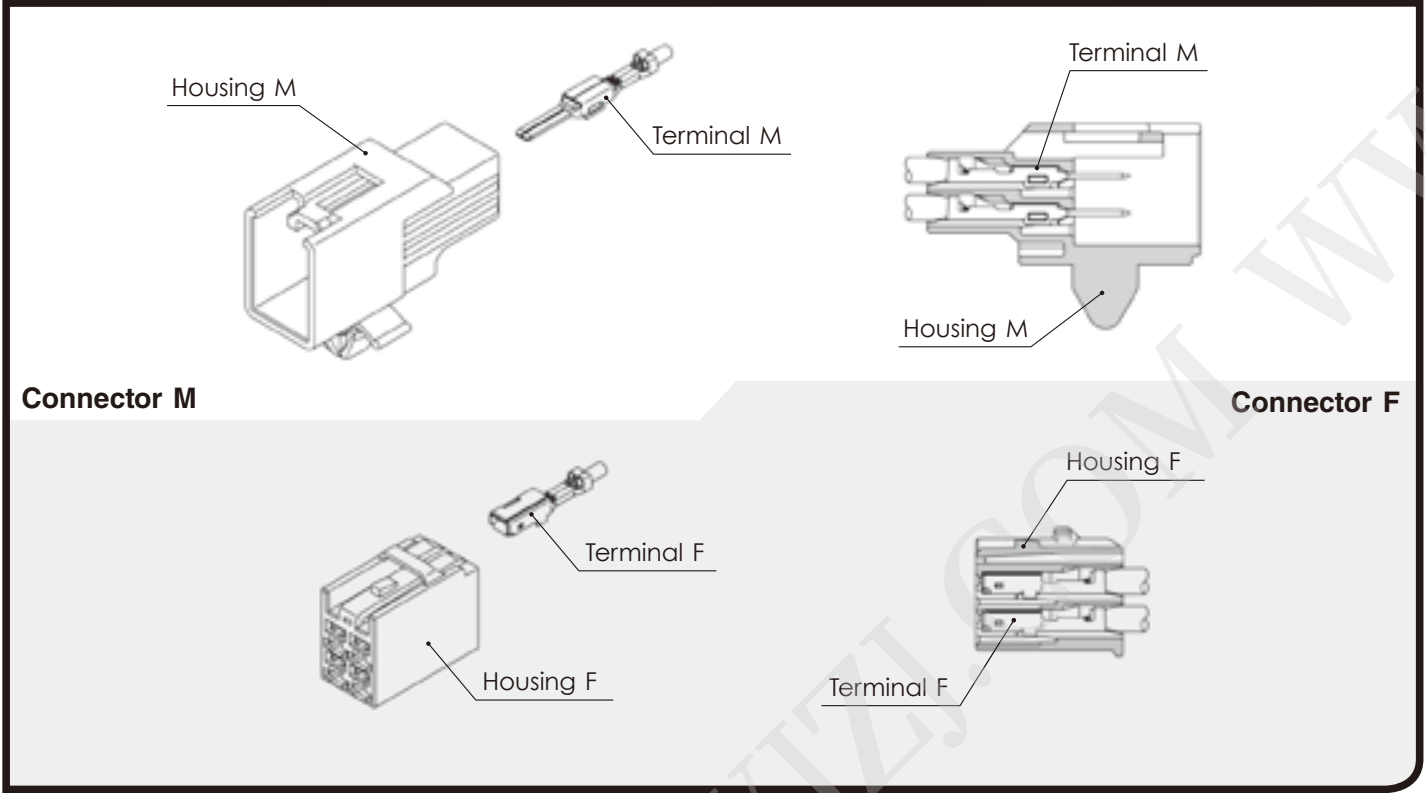

I-08


### 2.8mm (110)

### Terminal (UNIT : mm)

端子(毫米)


(S)

|                                         |                             |
|-----------------------------------------|-----------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.3~0.5                     |
| Material<br>材质                          | Heat-resistant copper alloy |
| Surface treatment<br>表面处理               | Tin-plated 镀锡               |



M (8100-3385)


F (8100-3394)





|                                         |                             |
|-----------------------------------------|-----------------------------|
| Cable size (mm <sup>2</sup> )<br>适用电线大小 | 0.3~0.5                     |
| Material<br>材质                          | Heat-resistant copper alloy |
| Surface treatment<br>表面处理               | Tin-plated 镀锡               |

**(M)**


|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.85~1.25                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(L)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0~3.0                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3386)****F (8100-3395)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.85~1.25                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3387)****F (8100-3396)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0~3.0                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**2.8mm (110)****Housing (UNIT : mm)**

接插件护套(毫米)

**Ref: Terminal part No.**  
端子参照页

I-08

**Material**  
材 质

PBT

**4way**

|                     |                                    |
|---------------------|------------------------------------|
| <b>Color</b><br>颜 色 | Natural<br>自然色                     |
| <b>Note</b><br>备 注  | With body fastening clamp<br>带防转卡钉 |





Plate thickness range for clamp:  
t=0.6~2.0mm  
Hole=7.2mm×10.2mm

**M (6098-3452)****F (6098-8480)**

|                     |                |
|---------------------|----------------|
| <b>Color</b><br>颜 色 | Natural<br>自然色 |
|---------------------|----------------|

I-09

SL SERIES

1.5mm, 2.8mm (060, 110)

## Housing (UNIT : mm)

|                        |         |      |
|------------------------|---------|------|
| Ref: Terminal part No. | [1.5mm] | I-02 |
| 端子参照页                  | [2.8mm] | I-08 |

|          |     |
|----------|-----|
| Material | PBT |
| 材 质      |     |

No. of way/ ( ) corresponds to 1.5mm, 2.8mm, in order from left to right.  
Note) Connector can be used together with 2mm<sup>2</sup> wire are 14 poled connectors.  
For details of each product, please contact our sales staff.


极数 / ( ) 内显示: 1.5mm 极数、2.8mm 极数  
※ L 尺寸端子的可用接插件有限制。  
务必向敝公司销售负责人问讯。

# SL SERIES for HYBRID

### 14way (10+4)


|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |

Note)



### M (6098-3450)


### F (6098-3458)



|       |         |
|-------|---------|
| Color | Natural |
| 颜 色   | 自然色     |

Note)

# SL SEALED SERIES

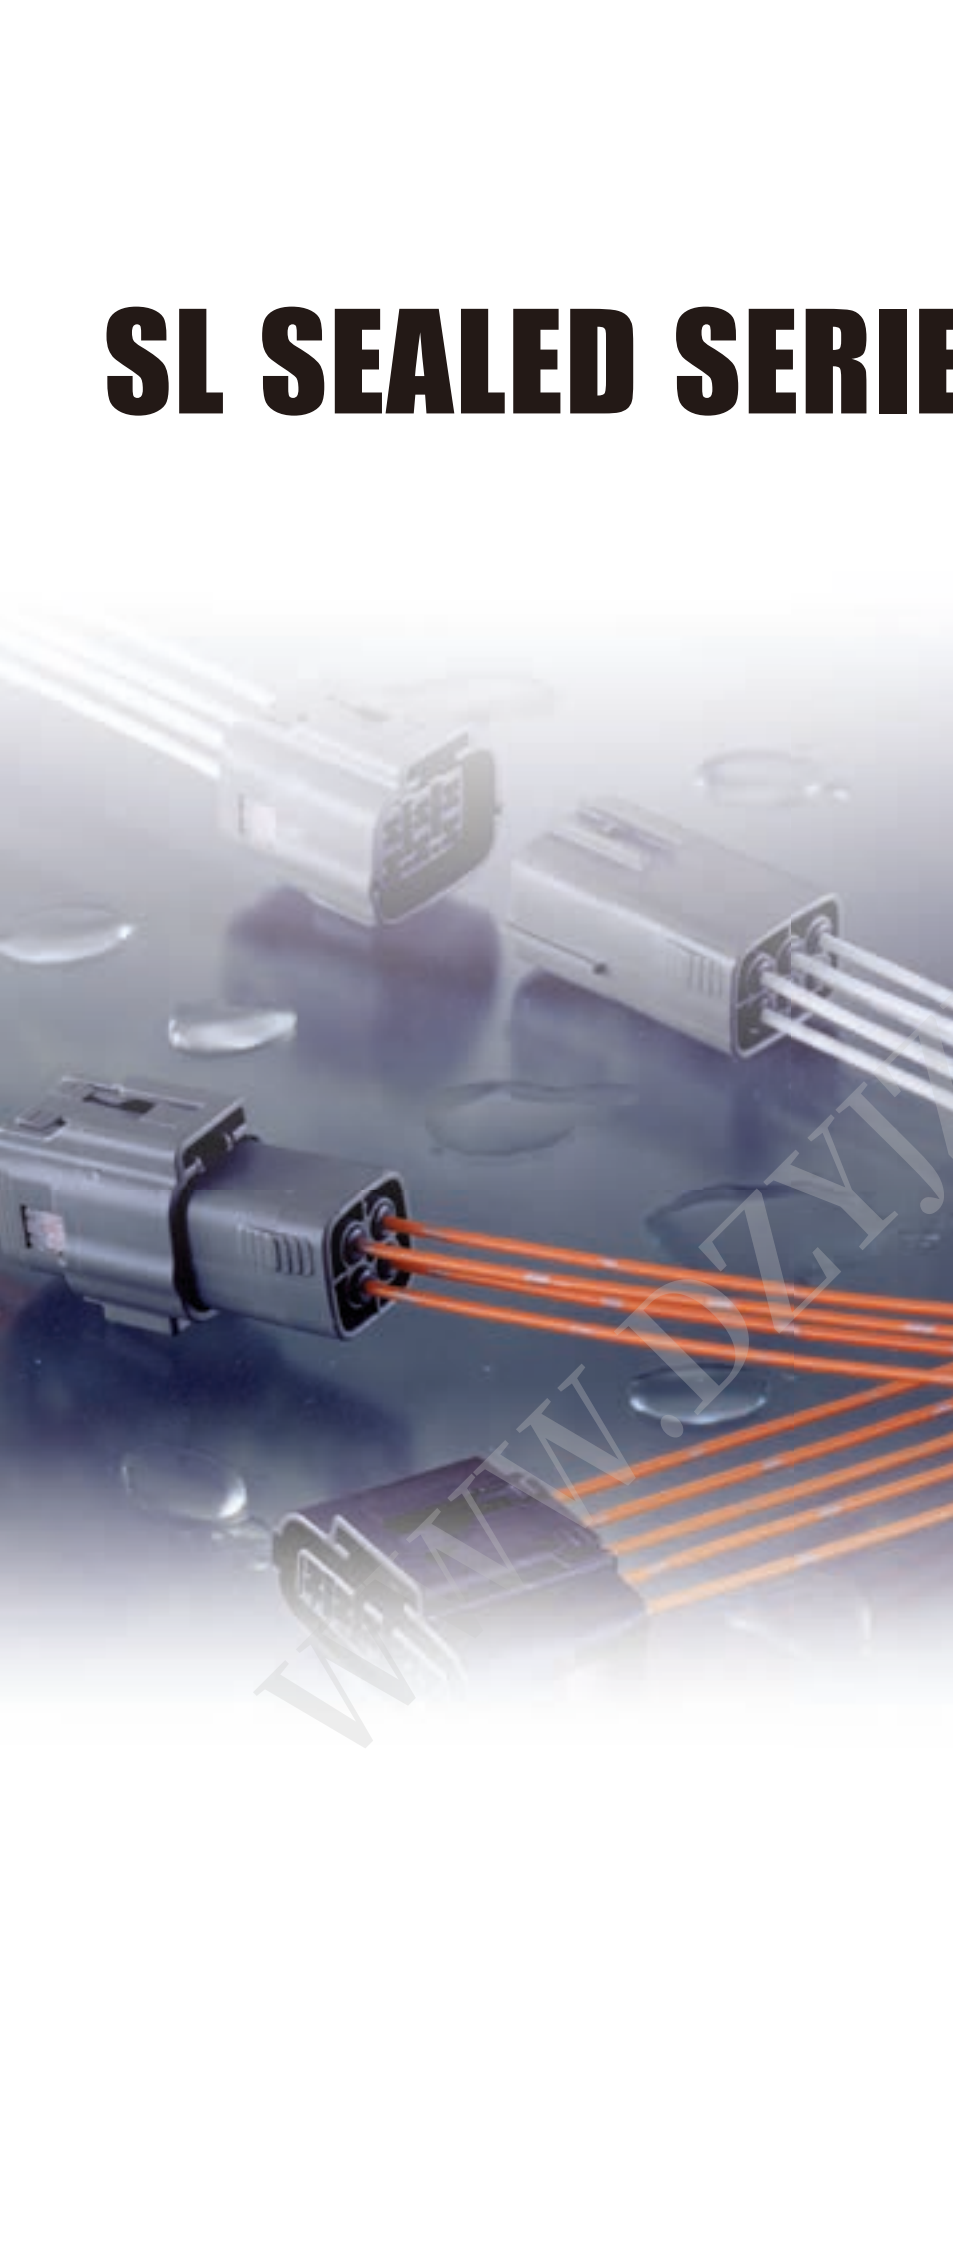

## Features

The SL sealed connector series is adopted a mechanism that detects terminal incomplete insertion by using a dedicated jig.

This series consists of 1.5mm, 2.3mm and 8.0mm types classified according to the terminal size, covering an extensive array of applications from signal circuits to low power circuits.

- These connectors can be directly secured to a bracket on the car body. In addition, an extra clip can be attached to the connector to secure it to the car body. (Note: Please contact our sales staff, if you have any questions regarding the dedicated jig.)
- RoHS/ELV Compliant

## 特点

SL 防水系列接插件采用了以专用治具检测端子半插入的构造。

按照端子尺寸划分为1.5mm·2.3mm·8.0mm 类型，从信号回路到电源回路，能广泛运用。

- 接插件可以直接固定在车体的支架上。另外在接插件上可安装为固定到车体的卡钉（卡子）


注意：有关专用导通治具的详情请向敝公司销售负责人确认。

- 可对应欧盟 RoHS 和 ELV 指令

# SL SEALED SERIES for STANDARD

## 1.5mm (060)

### Structure / 构造

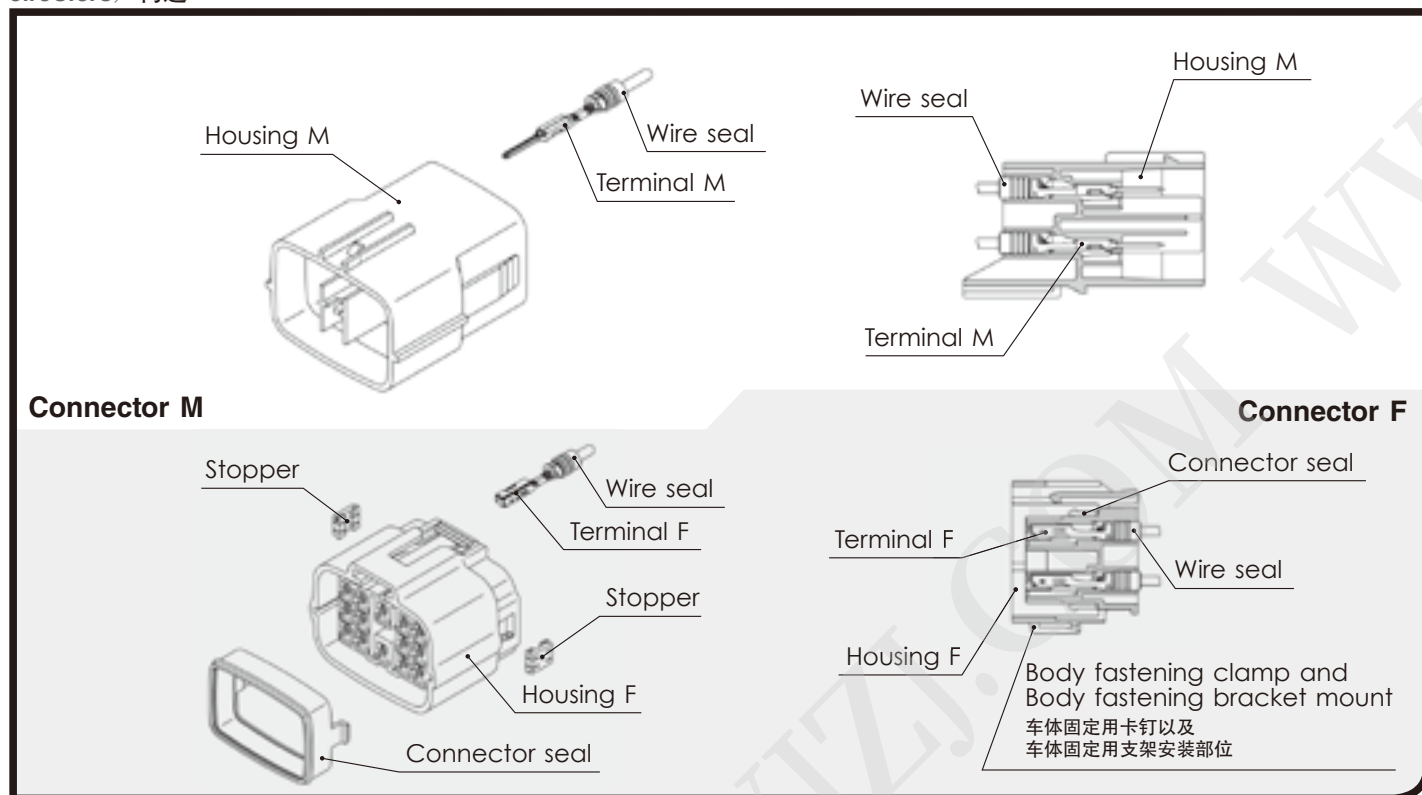

1.5mm (060)

### Terminal (UNIT : mm)



端子(毫米)

※ For terminal selection, please contact our sales staff.

※ 选定端子时, 请一定向敝公司销售负责人问讯。

**(S)**



|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3388)****F (8100-3397)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(S)****Au**



|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**M (8100-3504)****F (8100-3402)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**(M)**


|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75~0.85                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3389)****F (8100-3398)**



|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75~0.85                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(M)****Au****M (8100-3403)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75~0.85                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**(L)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 1.25~2.0                       |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**M (8100-3390)****F (8100-3399)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 1.25~2.0                       |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**J-03**

SL SEALED SERIES

## 1.5mm (060)

### Wire seals (UNIT : mm)

电线密封栓(毫米)

Ref: 1.5mm Terminal detail  
1.5mm端子参照页

S (7165-0516) J-07

M (7165-0515) J-07

L (7165-0514) J-07

## 1.5mm (060)

### Dummy plugs (UNIT : mm)

盲塞(毫米)

Ref: 1.5mm Dummy plug detail  
1.5mm盲塞参照页

(7161-9787) B-15

(7165-0193) J-07

J-04

## 1.5mm (060)

### Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No.  
端子参照页 J-02

Ref: wire seal No.  
电线密封栓参照页 J-06

Ref: Dummy plug No.  
盲塞参照页 B-15  
J-07

Material  
材 质 PBT


#### 2way

Color  
颜 色 Black  
黑  
Note  
备 注 J-11  
Clamp:TYPE2



M (6181-6614)


F (6189-1076)



Color  
颜 色 Black  
黑


#### 2way

Color  
颜 色 Dark Gray  
深灰  
Note  
备 注 J-11  
Clamp:TYPE2



M (6181-6509)


F (6189-1073)



Color  
颜 色 Dark Gray  
深灰


#### 2way

Color  
颜 色 Black  
黑  
Note  
备 注 J-11  
Clamp:TYPE2



M (6181-6492)


F (6189-1115)



Color  
颜 色 Black  
黑  
Note  
备 注 J-11  
Clamp:TYPE1

**2way**

**F (6189-1147)**




Color  
颜色

Black  
黑

**2way**

**F (6189-1144)**




Color  
颜色

Black  
黑

**2way**

**F (6189-1150)**




Color  
颜色

Dark Gray  
深灰

**2way**

**F (6189-1149)**




Color  
颜色

Dark Gray  
深灰

**3way**

**F (6189-7115)**




Color  
颜色

Black  
黑

**14way**


Color  
颜色

Dark Gray  
深灰



**M (6181-0629)**

**F (6189-7262)**



Color  
颜色

Dark Gray  
深灰

Note  
备注

J-11  
Clamp:TYPE1


J-05

SL SEALED SERIES

# SL SEALED SERIES for STANDARD

## 2.3mm (090)

### Structure / 构造

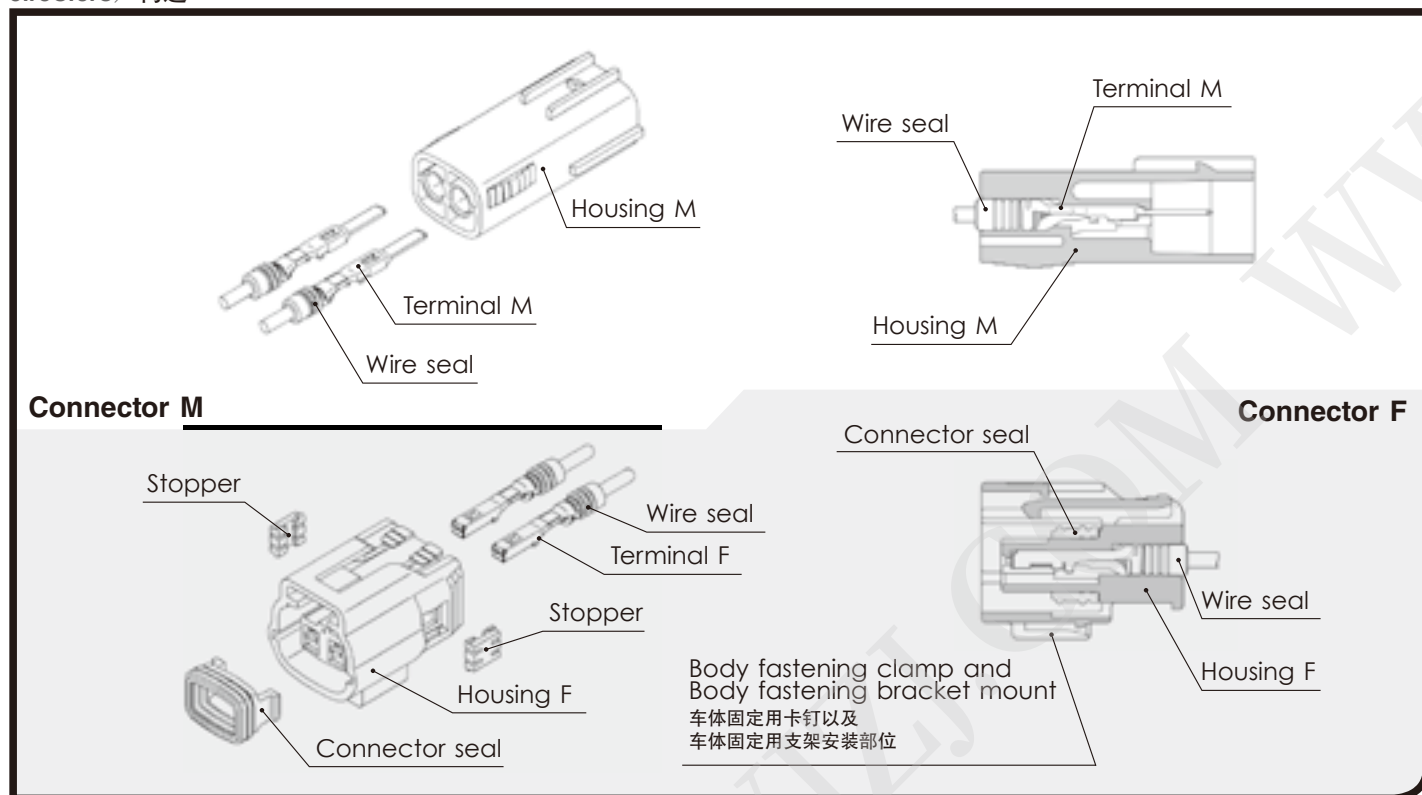

2.3mm (090)

### Terminal (UNIT : mm)

端子(毫米)

Ref; 2.3mm Terminal detail  
2.3mm端子参照页

|                      |      |                      |      |
|----------------------|------|----------------------|------|
| <b>S (8230-4472)</b> | L-02 | <b>F (8100-1427)</b> | L-02 |
| <b>M (8230-4562)</b> | L-02 | <b>F (8100-1429)</b> | L-02 |
| <b>L (8230-4552)</b> | L-02 | <b>F (8100-1428)</b> | L-02 |

Regarding "Gold-plated Terminal", please refer "L-02".  
镀金端子记载在L-02上

2.3mm (090)

### Wire seals (UNIT : mm)

电线密封栓(毫米)


The wire seals are common to M and F.  
电线密封栓为公端、母端共用。

**(S)****(7165-0516)**

Cable overall diameter(mm) Over than 1.4 mm below 1.6 mm  
带绝缘层外径 超过1.4mm在1.6mm以下

Material Silicon  
材 质 硅


Color Black  
颜 色 黑

**(M)****(7165-0515)**

Cable overall diameter(mm) Over than 1.6 mm below 2.4 mm  
带绝缘层外径 超过1.6mm在2.4mm以下

Material Silicon  
材 质 硅


Color Gray  
颜 色 灰

**(L)****(7165-0514)**

Cable overall diameter(mm) Over than 2.4 mm below 2.7 mm  
带绝缘层外径 超过2.4mm在2.7mm以下

Material Silicon  
材 质 硅

Color Dark Green  
颜 色 墨绿

**2.3mm (090)****Dummy plugs (UNIT : mm)**

盲塞(毫米)

Ref; 2.3mm Dummy plug detail  
2.3mm盲塞参照页

**(7161-9787)** B-15

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

**2.3mm (090)****Housing (UNIT : mm)**

接插件护套(毫米)

Ref: Terminal part No. L-02  
端子参照页


Ref: wire seal No. J-06  
电线密封栓参照页

Ref: Dummy plug No. B-11  
盲塞参照页



Material PBT  
材 质

**(7165-0193)**

Material Silicon  
材 质 硅  
Color Green  
颜 色 绿

**1way**

Color Dark Gray  
颜 色 深灰

**M (6181-0436)****F (6189-0639)**

Color Dark Gray  
颜 色 深灰  
Note J-11  
备 注 Clamp:TYPE1


**J-07**

SL SEALED SERIES

2way


Color  
颜色

Dark Gray  
深灰



M (6181-0437)

F (6189-0640)



Color  
颜色

Dark Gray  
深灰


Note  
备注

J-11  
Clamp:TYPE1

3way


Color  
颜色

Dark Gray  
深灰



M (6181-0438)

F (6189-7784)



Color  
颜色

Dark Gray  
深灰


Note  
备注

J-11  
Clamp:TYPE1

4way


Color  
颜色

Dark Gray  
深灰



M (6181-0439)

F (6189-0643)



Color  
颜色

Dark Gray  
深灰


Note  
备注

J-11  
Clamp:TYPE1

6way


Color  
颜色

Dark Gray  
深灰



M (6181-0440)

F (6189-0648)



Color  
颜色

Dark Gray  
深灰


Note  
备注

J-11  
Clamp:TYPE1

# SL SEALED SERIES for STANDARD

## 8.0mm (312)

### Structure / 构造

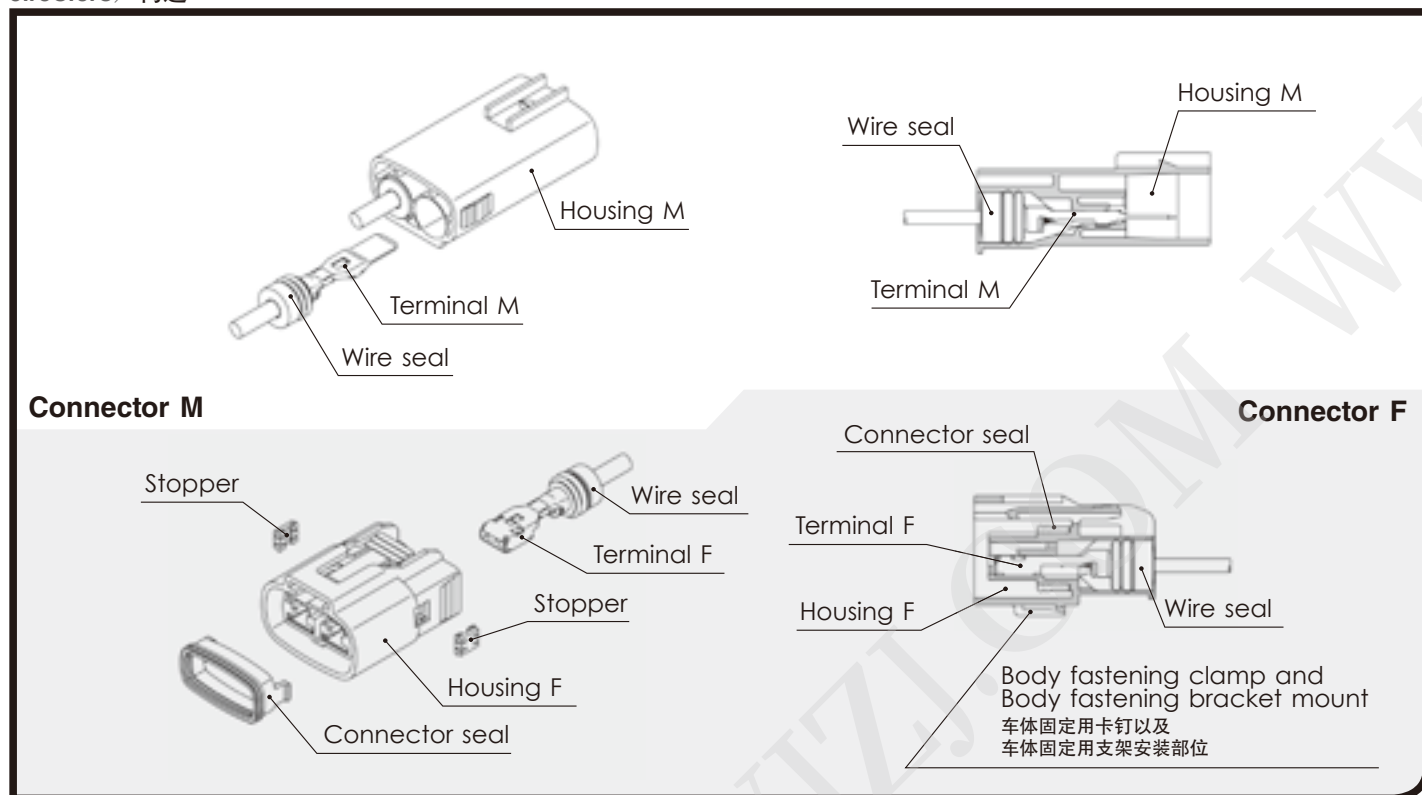

J-09

SL SEALED SERIES

8.0mm (312)

**Terminal** (UNIT : mm)



端子(毫米)

※ For terminal selection, please contact our sales staff.

※ 选定端子时, 请一定向敝公司销售负责人问讯。

**(M)**



|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0~3.0          |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8100-3259)****F (8100-3257)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 2.0~3.0                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(L)**

|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 5.0~8.0          |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8100-3260)****F (8100-3258)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 5.0~8.0                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**J-10****8.0mm (312)****Wire seals (UNIT : mm)**

电线密封栓 (毫米)

Ref: 8.0mm Wire Seals detail

8.0mm电线密封栓参照页

**SS (7165-0683)** B-24**S (7165-0400)** B-24**M (7165-0392)** B-24**L (7165-0393)** B-24

The wire seals are common to M and F.

电线密封栓为公端、母端共用。

**8.0mm (312)****Dummy plugs (UNIT : mm)**

盲塞 (毫米)

Ref: 8.0mm Dummy plug detail

8.0mm盲塞参照页

**(7165-0180)** B-25

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.


- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

**8.0mm (312)****Housing (UNIT : mm)**

接插件护套 (毫米)

Ref: Terminal part No. J-09  
端子参照页Ref: wire seal No. B-24  
电线密封栓参照页Ref: Dummy plug No. B-25  
盲塞参照页**Material** PBT  
材 质**2way**

|                     |                 |
|---------------------|-----------------|
| <b>Color</b><br>颜 色 | Dark Gray<br>深灰 |
|---------------------|-----------------|

**M (6181-0613)****F (6189-0915)**

|                     |                     |
|---------------------|---------------------|
| <b>Color</b><br>颜 色 | Dark Gray<br>深灰     |
| <b>Note</b><br>备 注  | J-11<br>Clamp:TYPE1 |

# SL SEALED SERIES

## COMMON USE

### PARTS

## Body fastening clamp (mm)

车体固定用卡钉(毫米)

1.5mm standard type, 2.3mm standard type and 8.0mm standard type connectors, the clamp can be installed.

※ The detail dimensions for the mounting portion are specified in drawing


根据需要, 可以在1.5mm 标准 • 2.3mm 标准 • 8.0mm 标准的接插件上, 安装用于固定在车体上的卡钉。

※安装部位的详细尺寸另行图纸规定。

### Type 1

(6810-1584)


|                                           |            |
|-------------------------------------------|------------|
| Material<br>材 质                           | PBT        |
| Color<br>颜 色                              | Brown<br>棕 |
| hole size<br>孔 径                          | 7.2×10.2   |
| Plate thickness range for clamp<br>卡钉适合板厚 | t=0.7~2.0  |



### Type 2


(6810-4982)

|                                           |                |
|-------------------------------------------|----------------|
| Material<br>材 质                           | PA66           |
| Color<br>颜 色                              | Natural<br>自然色 |
| Plate thickness range for clamp<br>卡钉适合板厚 | t=2.0          |





# DL SERIES

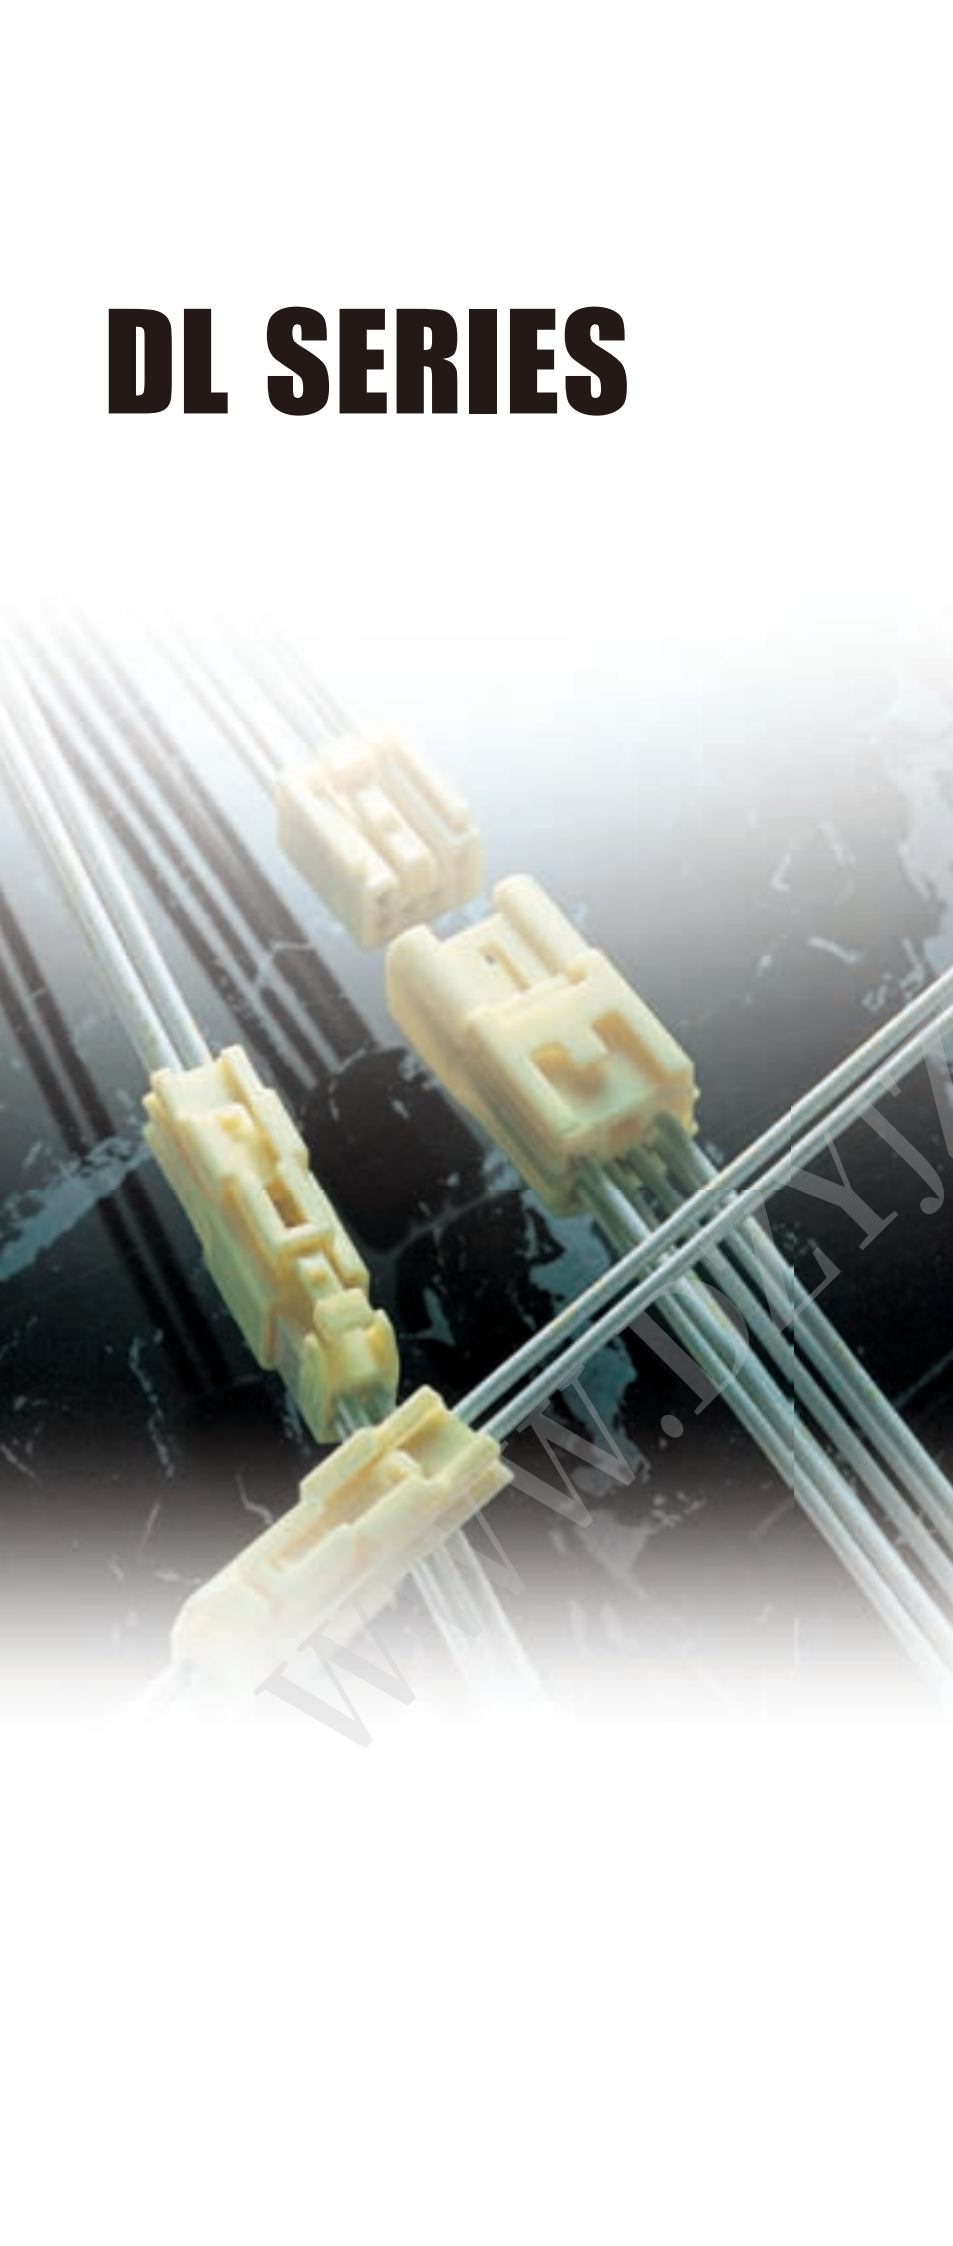

## Features

The DL connector series has a mechanism that detects when terminals are not inserted completely.

This series consists of 0.64mm, 1.0mm and 2.3mm types classified according to the terminal size, supporting use in a variety of control circuits and low power circuits.

- The connector mechanism only allows the retainer to be set when the terminal is completely inserted.
- These connectors can be directly secured to a bracket on the car body.
- RoHS/ELV Compliant

## 特点


DL 系列接插件具有检验端子插入不足的构造。按照端子尺寸划分为0.64mm · 1.0mm · 2.3mm 类型，可以应用于各种控制回路与低功率回路。

- 具有当端子在半插入状态时，锁片无法安装到位的检验功能。
- 接插件可以直接固定在车体的支架上。
- 可对应欧盟 RoHS 和 ELV 指令

# DL SERIES for STANDARD

0.64mm (025)

Structure / 构造

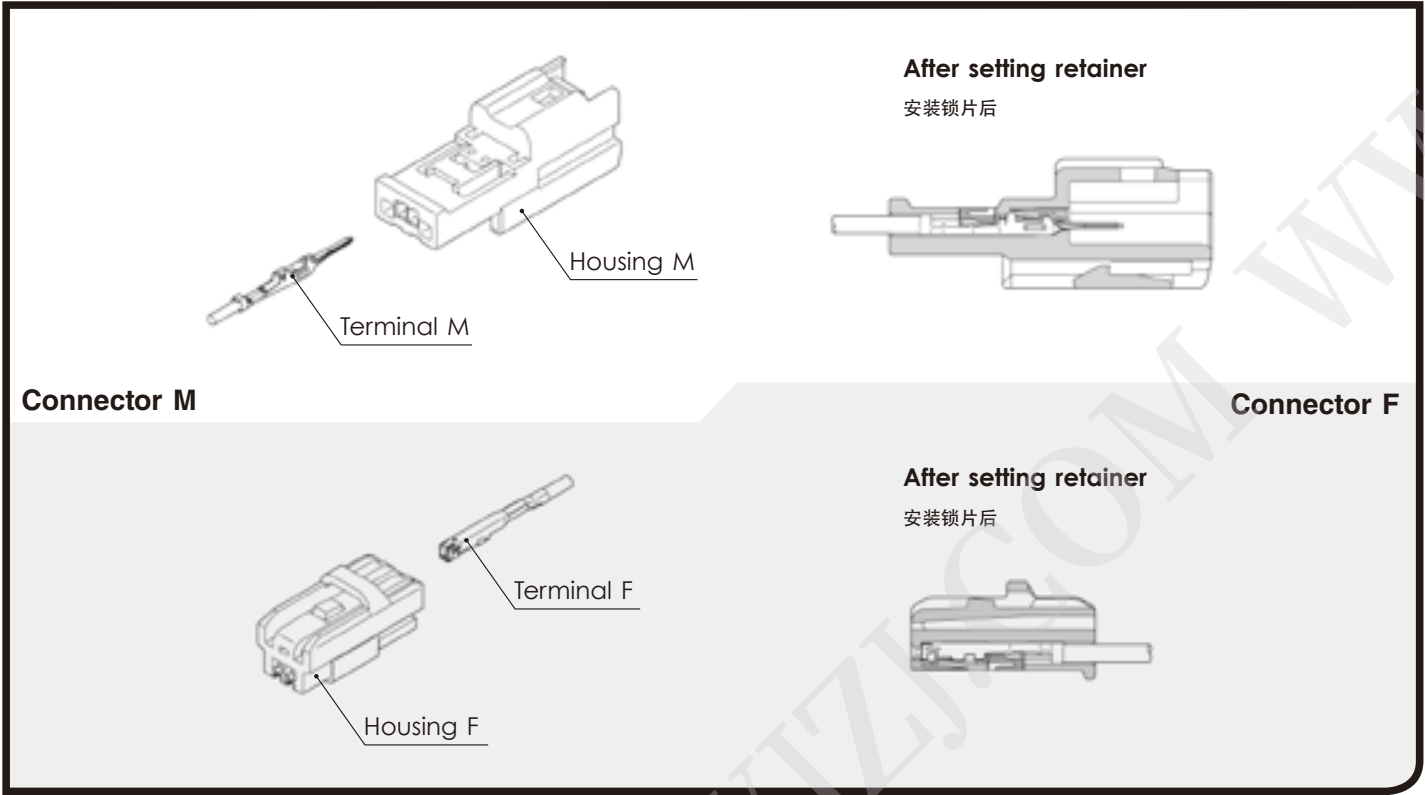

0.64mm (025)

## Terminal (UNIT : mm)

端子 (毫米)

Ref: 0.64mm Terminal detail  
0.64mm端子参照页

|   |               |      |               |      |
|---|---------------|------|---------------|------|
| S | M (8100-4028) | C-02 | F (8100-4029) | C-02 |
| M | M (8100-4027) | C-02 | F (8100-4030) | C-02 |

0.64mm (025)

## Housing (UNIT : mm)


接插件护套 (毫米)

Ref: Terminal part No.  
端子参照页

|                 |     |
|-----------------|-----|
| Material<br>材 质 | PBT |
|-----------------|-----|

2way

|             |                |
|-------------|----------------|
| Color<br>颜色 | Natural<br>自然色 |
|-------------|----------------|




M (6098-4569)


|             |                                     |
|-------------|-------------------------------------|
| Color<br>颜色 | Natural<br>自然色                      |
| Note<br>备注  | With body fastening clamp.<br>带防转卡钉 |

Plate thickness range for clamp;  
 $t=0.6\sim2.0\text{mm}$   
Hole= $7.2\text{mm}\times10.2\text{mm}$

M (6098-4567)



F (6098-4565)




|             |                |
|-------------|----------------|
| Color<br>颜色 | Natural<br>自然色 |
|-------------|----------------|

# DL SERIES for STANDARD

## 1.0mm (040)

This connector has a terminal pitch of 2.5 mm.  
端子间距2.5mm的接插件

### Structure / 构造

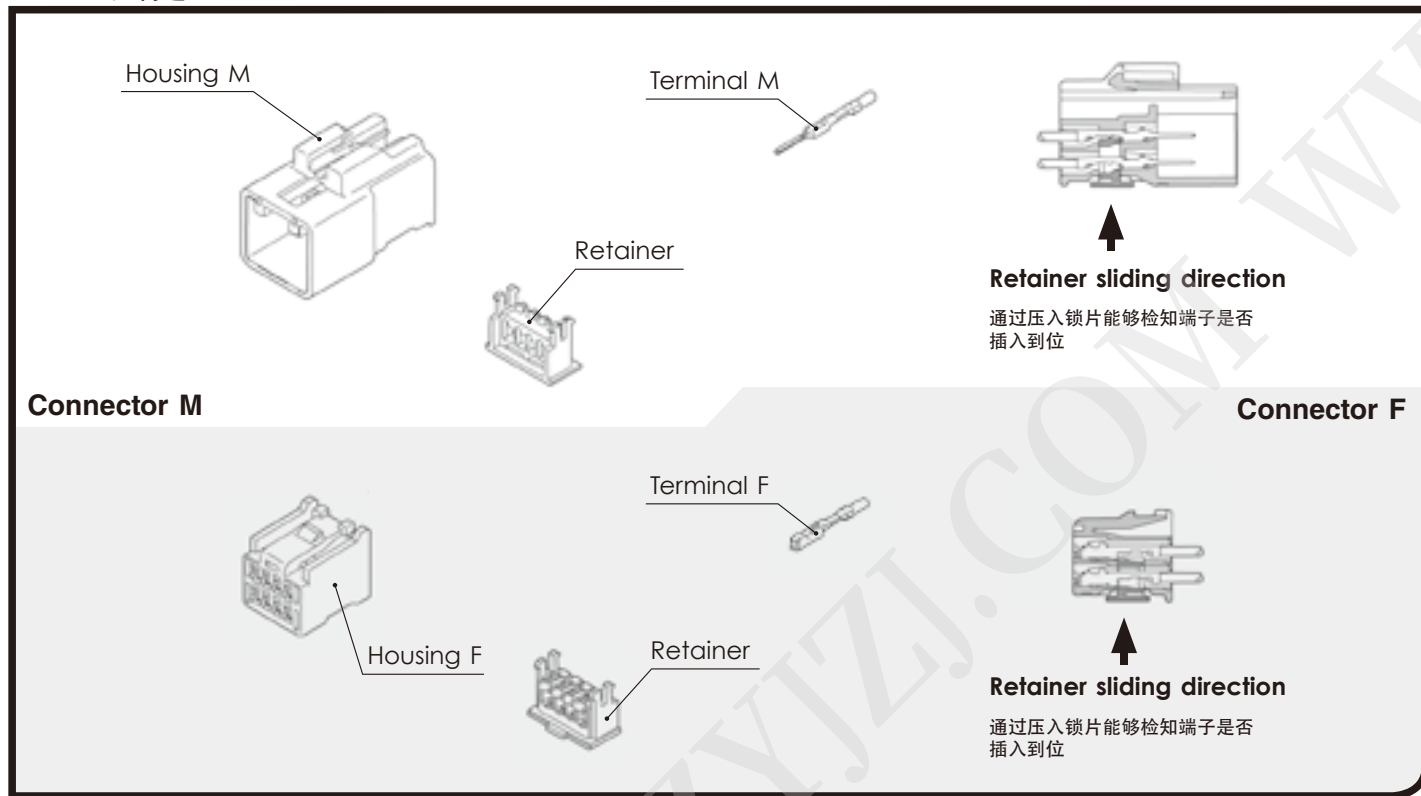

## 1.0mm (040)

### Terminal (UNIT : mm)

端子(毫米)

※For terminal selection, please contact our sales staff.  
Note) M size terminal can be used connector with insertion cavity specified. For details please contact our sales staff.

※ Surface treatment of gold-plated is available to meet your needs.

Thick size is for the time being now.

※选定端子时, 请一定向敝公司销售负责人问讯。

注) M 尺寸端子的可用接插件有限制。


请一定向敝公司销售负责人问讯。

※ 有关镀金式样, 根据需要可以定制。



此外、厚度仅供临时参考。

**(S)**

|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5          |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**(S)****Au****F (8240-0300)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |



**M (8100-2512)****F (8100-1710)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(M)**

|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75, 0.85~1.25  |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

Note)

**M (8100-2513)****F (8100-2514)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75, 0.85~1.25                |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

Note)

**1.0mm (040)****Housing (UNIT : mm)**

接插件护套 (毫米)

**Ref: Terminal part No.**  
端子参照页

K-04

**Material**  
材 质



PBT

Note) M size terminal can be used connector with insertion cavity specified. For details please contact our sales staff.

注) M 尺寸端子的可用接插件有限制。

**4way**

|                     |                |
|---------------------|----------------|
| <b>Color</b><br>颜 色 | Natural<br>自然色 |
|---------------------|----------------|

**M (6098-2158)****F (6098-2013)**

|                     |                |
|---------------------|----------------|
| <b>Color</b><br>颜 色 | Natural<br>自然色 |
|---------------------|----------------|

**K-05**


DL SERIES

8way

Color  
颜色


Natural  
自然色

Note)



M (6098-2206)

F (6098-2208)




Note)

Color  
颜色

Natural  
自然色

12way

F (6098-2289)




Color  
颜色

Natural  
自然色

16way

F (6098-1624)




Color  
颜色

Natural  
自然色

20way

F (6098-1626)




Color  
颜色

Natural  
自然色

# DL SERIES for STANDARD

## 2.3mm (090)

### Structure / 构造

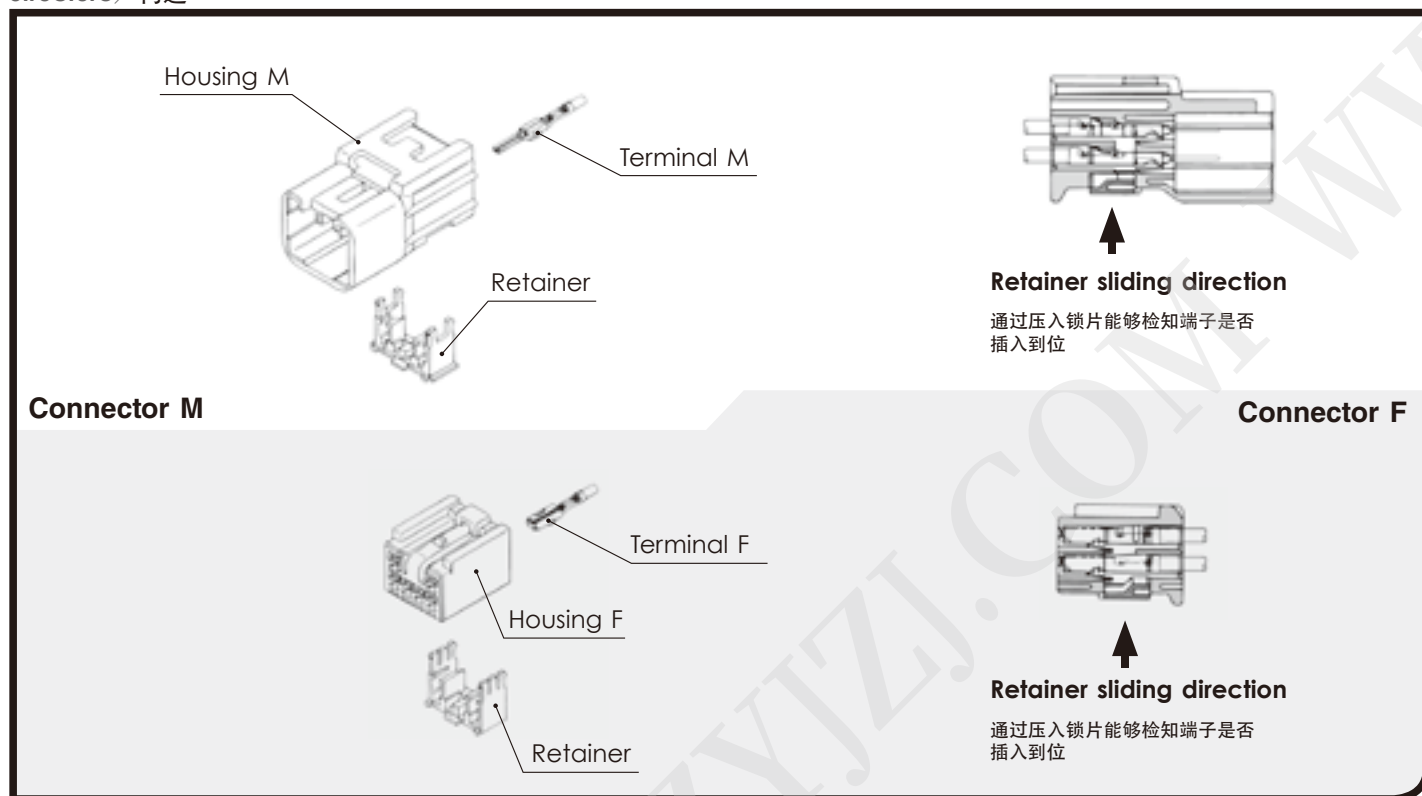

K-07

DL SERIES

## 2.3mm (090)

### Terminal (UNIT : mm)

端子(毫米)

Ref: 2.3mm Terminal detail  
2.3mm端子参照页

|          |                      |      |                      |      |
|----------|----------------------|------|----------------------|------|
| <b>S</b> | <b>M (8230-4492)</b> | A-10 | <b>F (8240-4882)</b> | A-10 |
| <b>M</b> | <b>M (8230-4502)</b> | A-10 | <b>F (8240-4892)</b> | A-10 |
| <b>L</b> | <b>M (8230-4512)</b> | A-10 | <b>F (8240-4942)</b> | A-10 |

Regarding "Gold-plated Terminal", please refer "A-10".  
镀金端子记载在A-10上

## 2.3mm (090)

### Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No.  
端子参照页


**Material**  
材 质

Low water absorption  
Nylon

## 2way


Color  
颜色

Natural  
自然色



M (6249-1248)

F (6249-1251)




Color  
颜色

Natural  
自然色

## 4way


Color  
颜色

Natural  
自然色



M (6249-1249)

F (6249-1252)




Color  
颜色

Natural  
自然色

## 6way


Color  
颜色

Natural  
自然色



M (6249-1250)

F (6249-1253)




Color  
颜色

Natural  
自然色

## 10way

F (6248-5311)




Color  
颜色

Natural  
自然色

## 14way


Color  
颜色

Natural  
自然色



M (6249-1265)

F (6248-5309)




Color  
颜色

Natural  
自然色

## 16way


Color  
颜色

Natural  
自然色



M (6249-1266)


F (6248-5310)



Color  
颜色

Natural  
自然色

# DL SEALED SERIES

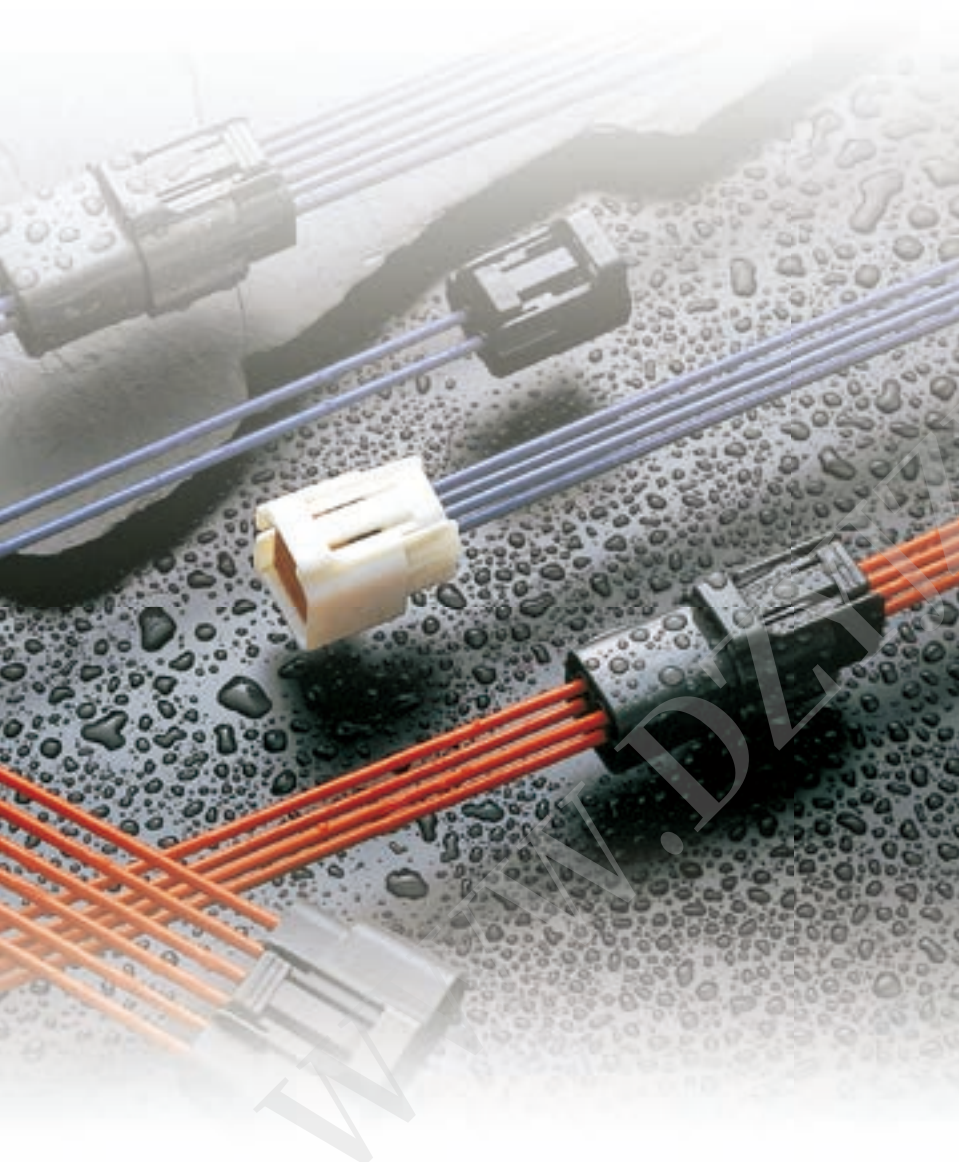

## Features

The DL sealed connector series has a mechanism that detects when terminals are not inserted completely.

The series consists of 2.3mm type covering an extensive array of applications from signal circuits to power circuits.

- The connector mechanism only allows the retainer to be set when the terminal is completely inserted.
- These connectors can be directly secured to a bracket on the car body.
- In addition, an extra clip can be attached to the connector to secure it to the car body.
- RoHS/ELV Compliant

## 特点

DL 防水系列接插件具有检验端子插入不足的功能。


尺寸为2.3mm 的端子可广泛应用于信号回路或低功率回路等。

- 具有当端子在半插入状态时，锁片无法安装到正确位置的检知功能。
- 接插件可以直接固定在车体的支架上。
- 另外在接插件上可安装为固定到车体的卡钉（卡子）。
- 可对应欧盟 RoHS 和 ELV 指令

# DL SEALED SERIES for STANDARD

## 2.3mm (090)

### Structure / 构造

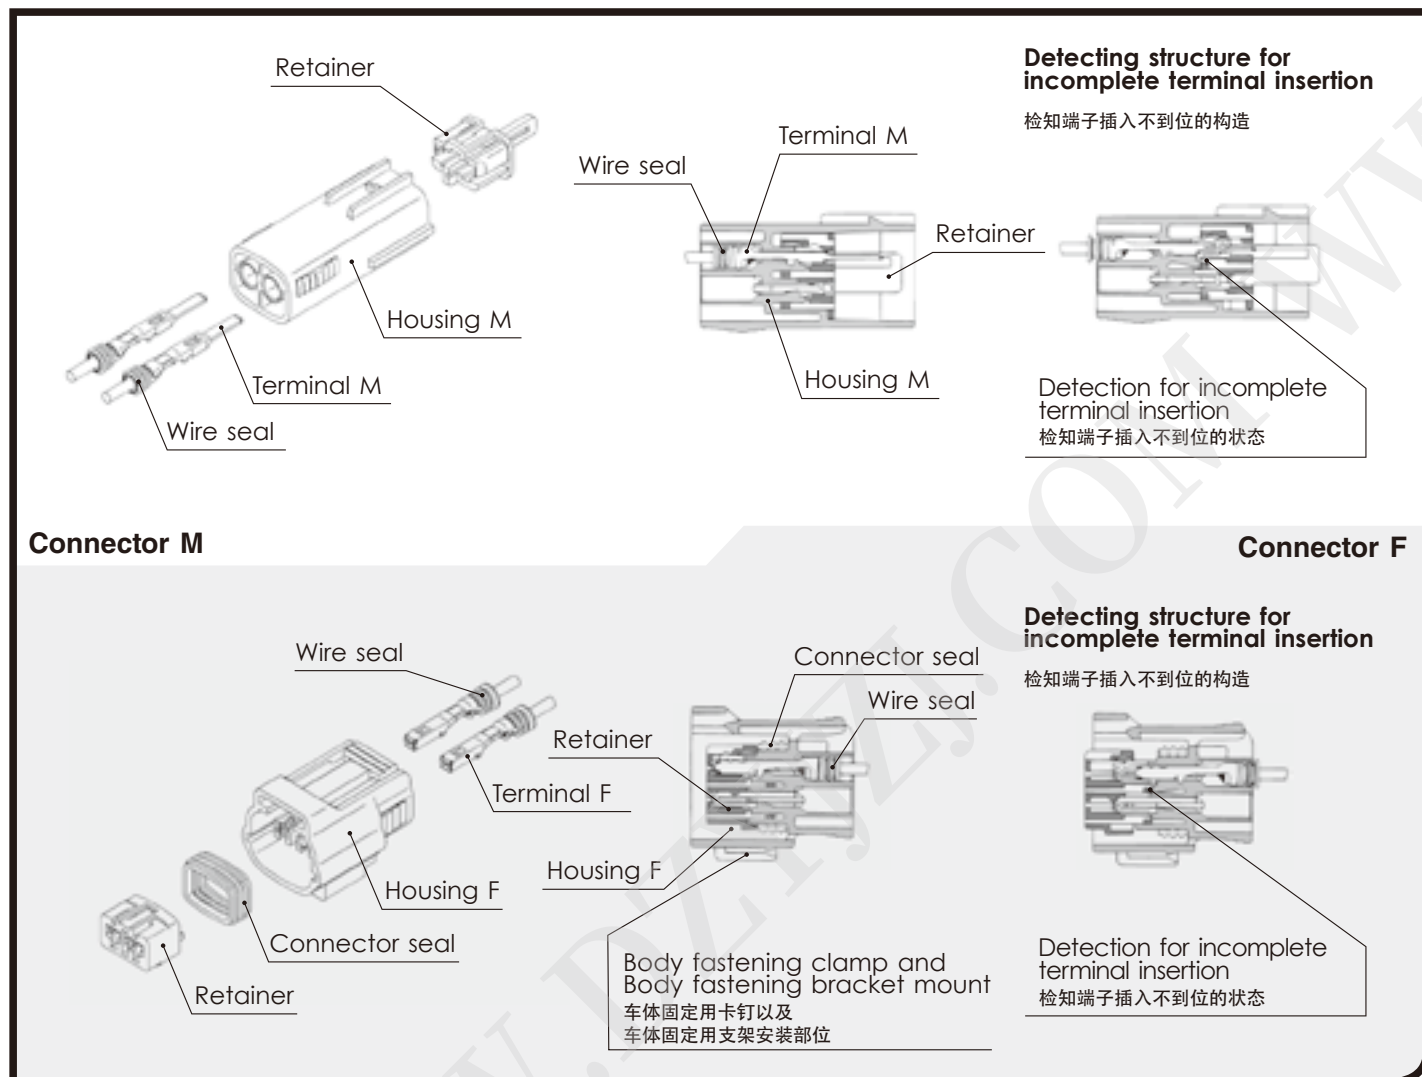

2.3mm (090)

### Terminal (UNIT : mm)



端子(毫米)

※ For terminal selection, please contact our sales staff.

※ 选定端子时, 请一定向敝公司销售负责人问讯。

**(S)**



|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5          |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8230-4472)****F (8100-1427)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(S)****Au**



|                                              |                   |
|----------------------------------------------|-------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5           |
| <b>Material</b><br>材 质                       | Brass<br>黄铜       |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金 |

**M (1500-0159)****F (8100-1458)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.3~0.5                        |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**(M)**



|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75~0.85        |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8230-4562)****F (8100-1429)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75~0.85                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(M)****Au**



|                                              |                   |
|----------------------------------------------|-------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75~0.85         |
| <b>Material</b><br>材 质                       | Brass<br>黄铜       |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金 |

**M (1500-0169)****F (8100-1460)**


|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 0.75~0.85                      |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**(L)**

|                                              |                  |
|----------------------------------------------|------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 1.25~2.0         |
| <b>Material</b><br>材 质                       | Brass<br>黄铜      |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡 |

**M (8230-4552)****F (8100-1428)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 1.25~2.0                       |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Tin-plated<br>镀锡               |

**(L)****Au****F (8100-1459)**

|                                              |                                |
|----------------------------------------------|--------------------------------|
| <b>Cable size (mm<sup>2</sup>)</b><br>适用电线大小 | 1.25~2.0                       |
| <b>Material</b><br>材 质                       | Heat-resistant<br>copper alloy |
| <b>Surface treatment</b><br>表面处理             | Gold-plated<br>镀金              |

**L-03**

DL SEALED SERIES

## 2.3mm (090)

### Wire seals (UNIT : mm)

电线密封栓(毫米)

- The wire seals are common to M and F.
- 电线密封栓为公端、母端共用。


(S)

(7165-0118)

Cable overall diameter(mm) Over than 1.5 mm below 2.0 mm  
带绝缘层外径 超过1.5mm在2.0mm以下

Material NBR

Color Blue  
颜色 蓝




(SS)

(7165-0210)

Cable overall diameter(mm) Over than 1.1 mm below 1.5 mm  
带绝缘层外径 超过1.1mm在1.5mm以下

Material NBR

Color Red  
颜色 红




(M)

(7165-0119)

Cable overall diameter(mm) Over than 2.0 mm below 2.9 mm  
带绝缘层外径 超过2.0mm在2.9mm以下

Material NBR

Color Brown  
颜色 棕



## 2.3mm (090)

### Dummy plugs (UNIT : mm)

盲塞(毫米)

Ref; 2.3mm Dummy plug detail  
2.3mm盲塞参照页

(7161-9787) B-15

(7165-0193) J-07

- Dummy plugs are common to M and F.
- Dummy plugs are used to blind unused terminal holes.
- 盲塞为公端、母端共用。
- 盲塞用于堵塞不使用的端子孔。

## 2.3mm (090)

### Housing (UNIT : mm)

接插件护套(毫米)

Ref: Terminal part No. L-02  
端子参照页


Ref: wire seal No. L-04  
电线密封栓参照页

Ref: Dummy plug No. B-11 J-07  
盲塞参照页

Material PBT or Low water absorption Nylon  
材质


### 1way

Color Dark Gray  
颜色 深灰



### M (6195-0240)


### F (6195-0066)



Color Dark Gray  
颜色 深灰  
Note L-07  
备注 Bracket Clamp : TYPE2


### 2way

Color Dark Gray  
颜色 深灰



### M (6195-0006)


### F (6195-0003)



Color Dark Gray  
颜色 深灰  
Note L-07  
备注 Bracket Clamp : TYPE2


### 3way

Color Dark Gray  
颜色 深灰



### M (6195-0012)


### F (6195-0009)



Color Dark Gray  
颜色 深灰  
Note L-07  
备注 Bracket Clamp : TYPE2


### 4way

Color Dark Gray  
颜色 深灰



### M (6195-0018)


### F (6195-0015)



Color Dark Gray  
颜色 深灰  
Note L-07  
备注 Bracket Clamp : TYPE2


### 6way

Color Dark Gray  
颜色 深灰



### M (6195-0024)

### F (6195-0021)



Color Dark Gray  
颜色 深灰  
Note L-07  
备注 Bracket Clamp : TYPE2


L-05

DL SEALED SERIES

## 8way


Color  
颜色

Dark Gray  
深灰



M (6195-0054)

F (6195-0051)



Color  
颜色

Dark Gray  
深灰


Note  
备注

L-07  
Bracket Clamp : TYPE2

## 10way


Color  
颜色

Light Gray  
浅灰



M (6195-0167)

F (6195-0164)



Color  
颜色

Light Gray  
浅灰


Note  
备注

L-07  
Bracket Clamp : TYPE2

## 12way


Color  
颜色

Dark Gray  
深灰



M (6195-0152)

F (6195-0149)



Color  
颜色

Dark Gray  
深灰

Note  
备注

L-07  
Bracket Clamp : TYPE2


## 16way

Color  
颜色

Dark Gray  
深灰


Note  
备注

L-07  
Bracket Clamp : TYPE1



M (6188-0495)

F (6189-0715)




Color  
颜色

Dark Gray  
深灰

# DL SEALED SERIES COMMON USE PARTS

## Body fastening clamp (mm)


2.3mm standard type connectors, the clamp can be installed.  
※ The detail dimensions for the mounting portion are specified in drawing  
根据需求可以在2.3mm 标准的接插件上，安装用于固定在车体上的卡钉。  
※安装部位的详细尺寸另行图纸规定。

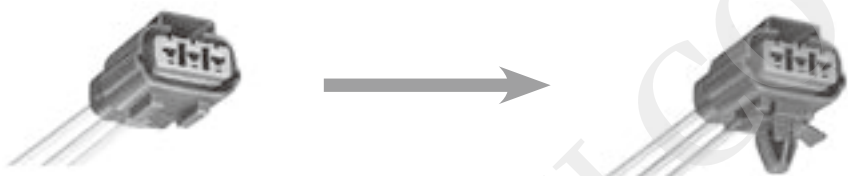

### Type 1

|                                           |                |
|-------------------------------------------|----------------|
| Material<br>材 质                           | PA6T           |
| Color<br>颜 色                              | Natural<br>自然色 |
| hole size<br>孔 径                          | φ 7.0          |
| Plate thickness range for clamp<br>卡钉适合板厚 | t=0.6~1.6      |


(6810-2653)



### Type 2


|                                           |            |
|-------------------------------------------|------------|
| Material<br>材 质                           | PBT        |
| Color<br>颜 色                              | Brown<br>棕 |
| hole size<br>孔 径                          | 7.2×10.2   |
| Plate thickness range for clamp<br>卡钉适合板厚 | t=0.7~2.0  |

(6810-1584)





# HFC III SERIES

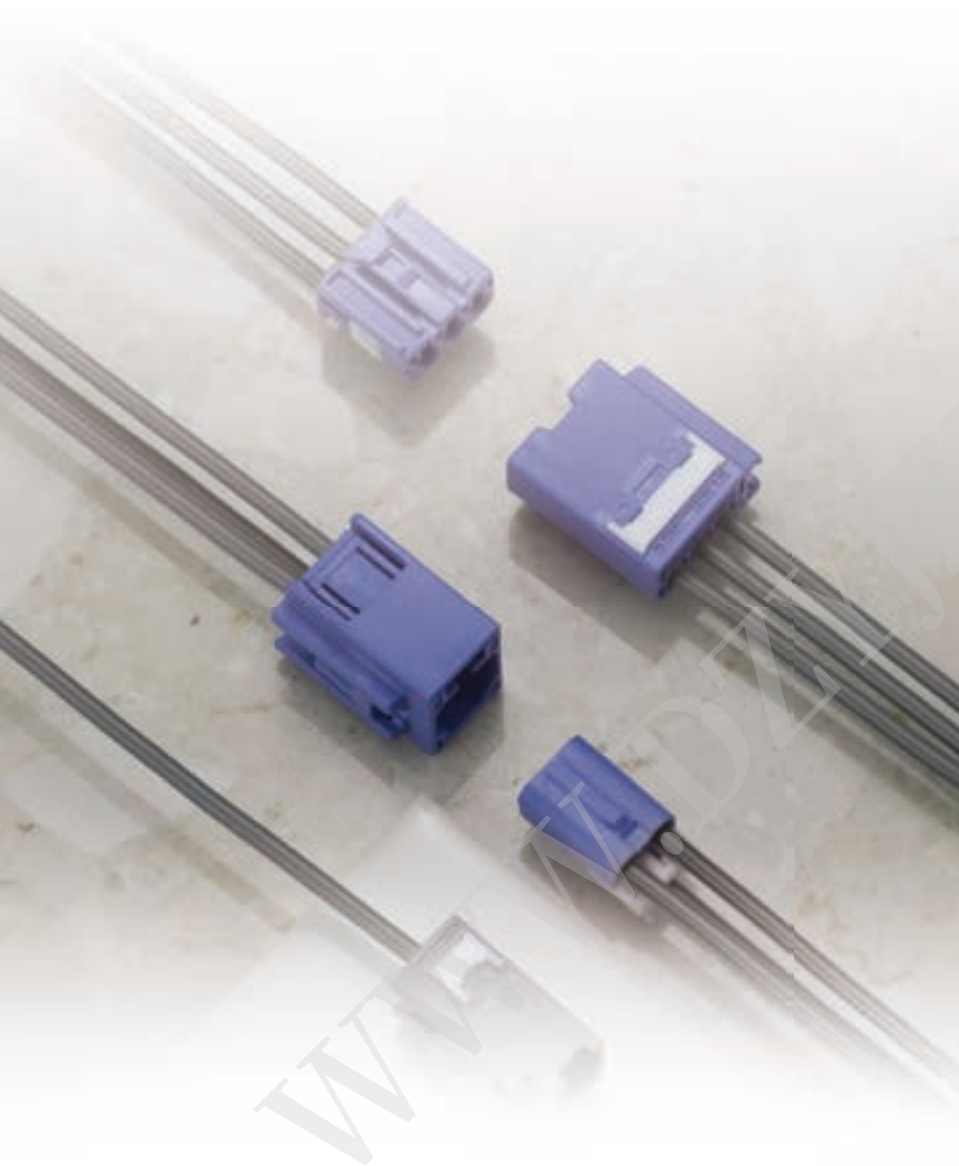

## Features

HFC III (High Frequency Connector) series are connectors that connect on-board multimedia devices, such as GPS, TV, VICS and etc., and coaxial wires. These are also suitable for mobile telephone and sensor circuit.

- It reduces reflection/transmission loss and restraints noise radiation. It achieved smaller size with higher performance.
- Hybrid types for high frequency coaxial wire and automobile wire (AV) are established. (It supports diversity receiving system).
- Retainer for secondary lock is preloaded and the structure allows the high frequency coaxial wire and AV wire to be set by one operation. Therefore improvement of assembling operation can be planned.
- RoHS/ELV Compliant


## 特点

HFC III系列（高频接插件）使用于GPS·TV·VICS等车载多媒体模块相同的同轴线连接用接插件，也适用于车载电话、传感器回路上。

- 制止传送损失、反射、杂讯放射、实现了小型高性能化。
- 设定了高频同轴线和汽车用电线(AV)的混合型。(可以应用于多样性收信方式。)
- 通过预先安装双重锁定锁片、高频同轴线与AV线都能够通过简单的操作进行安装，可提高效率。
- 可对应欧盟 RoHS 和 ELV 指令

# HFC III SERIES for STANDARD

## Structure / 构造

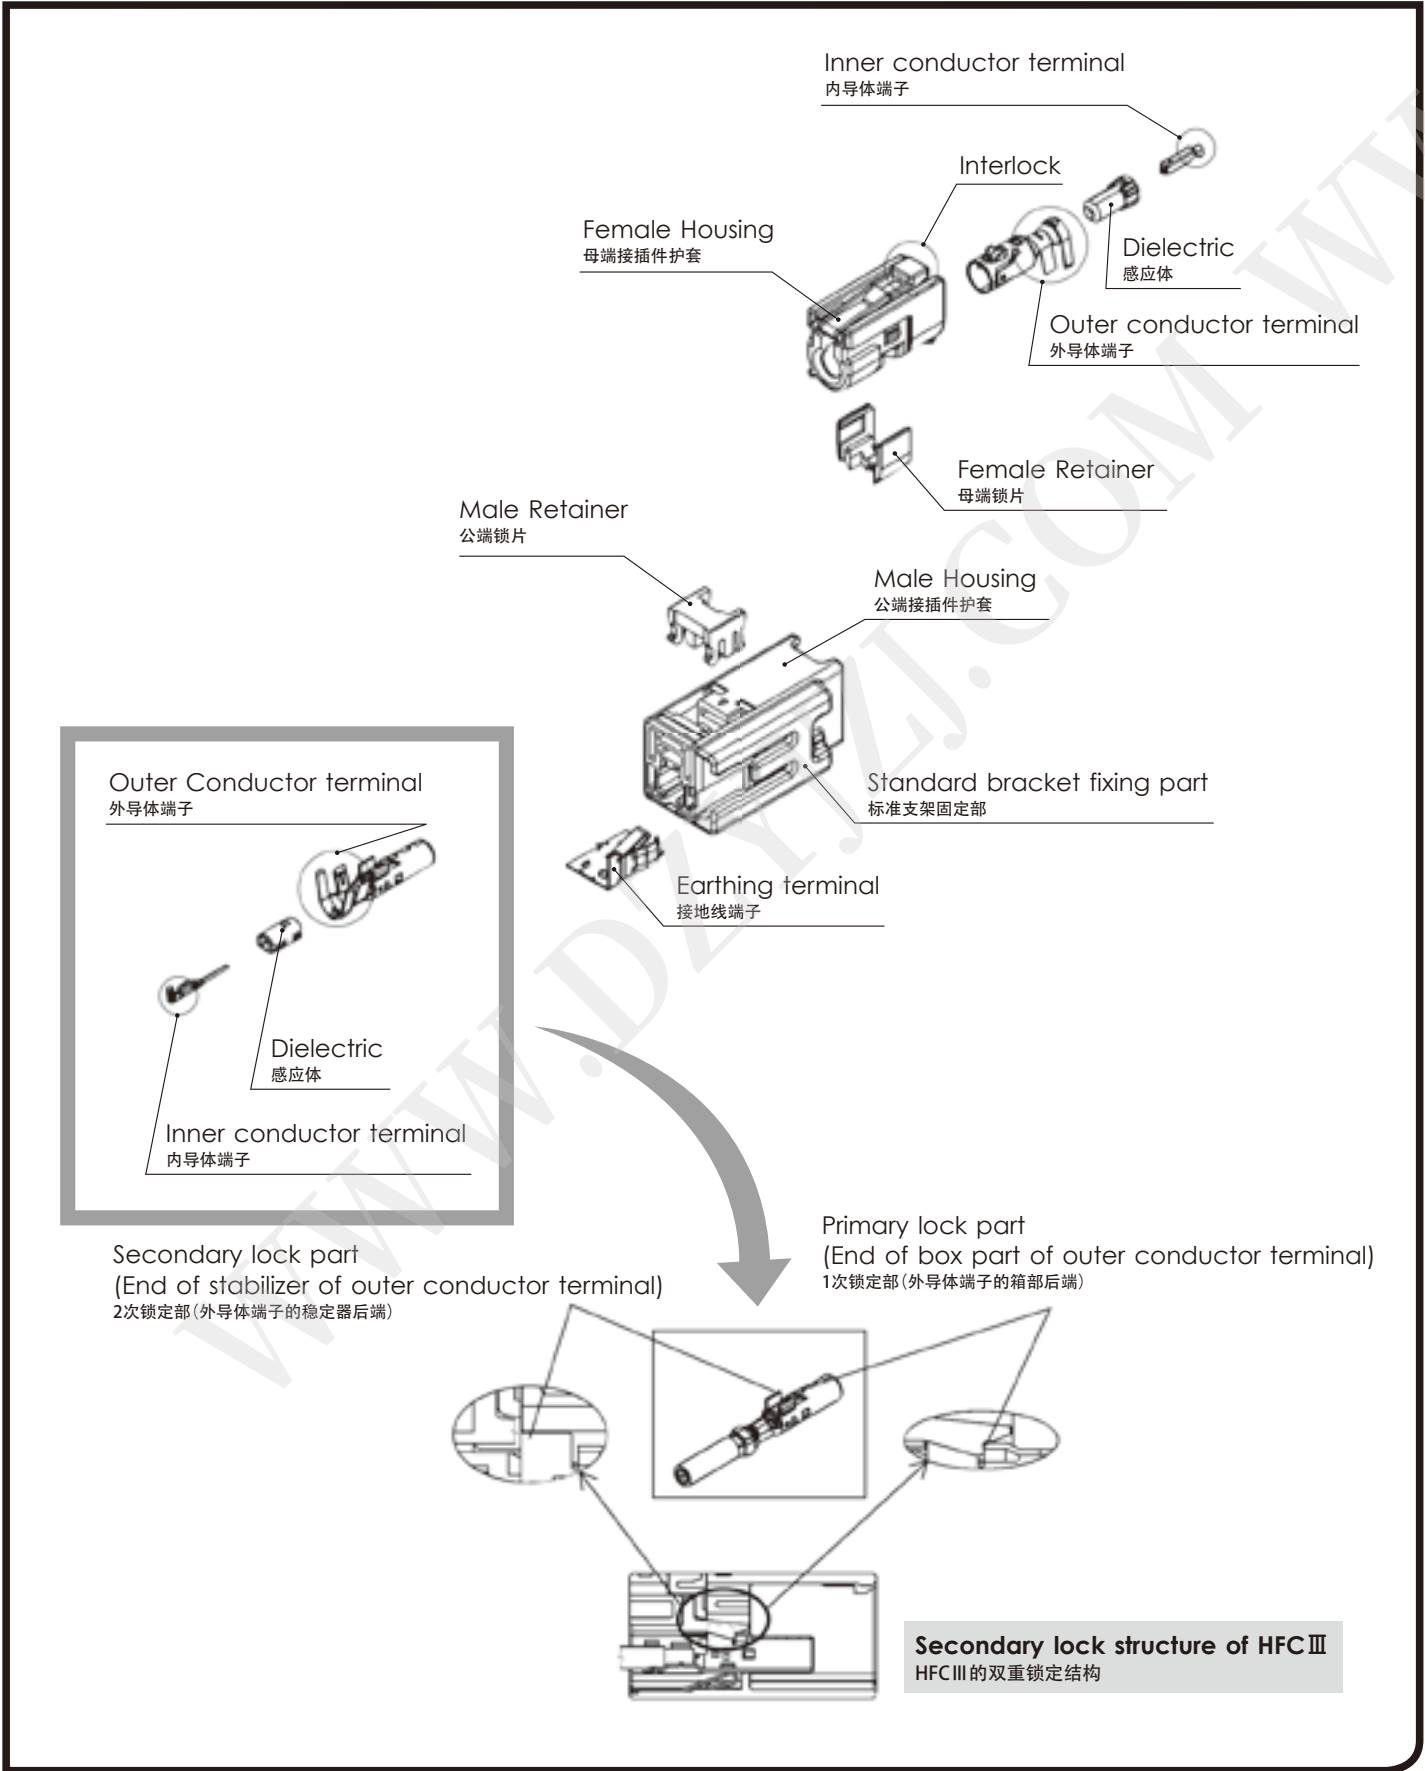

Basic specification / 基本规格

|                               |      |                     |                                                                                                                                                         |          |
|-------------------------------|------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| Type                          |      |                     | 1 way coaxial wire<br>2 way coaxial wire + 1way AV wire<br>2 way coaxial wire + 2way AV wire<br>3 way coaxial wire<br>4 way coaxial wire + 2way AV wire |          |
| Contact resistance<br>接触电阻    |      | Coaxial wire<br>同轴线 | Max. 20mΩ (Initial／初期)                                                                                                                                  |          |
|                               |      | AV wire<br>AV线      | Max. 8mΩ (Initial／初期)                                                                                                                                   |          |
| Insulation resistance<br>绝缘电阻 |      |                     | Min. 100MΩ                                                                                                                                              |          |
| Working temperature<br>使用温度   |      |                     | －40℃～＋105℃                                                                                                                                              |          |
| VSWR                          | 75Ω系 | ～180MHz             | Wire to Wire                                                                                                                                            | Max. 1.2 |
|                               |      |                     | PCB to Wire                                                                                                                                             |          |
|                               |      | ～770MHz             | Wire to Wire                                                                                                                                            | Max. 1.4 |
|                               |      |                     | PCB to Wire                                                                                                                                             |          |
|                               | 50Ω系 | ～3GHz               | Wire to Wire                                                                                                                                            | Max. 1.4 |
|                               |      |                     | PCB to Wire                                                                                                                                             | Max. 1.3 |

|                |            |                        |                                                           |
|----------------|------------|------------------------|-----------------------------------------------------------|
| Material<br>材质 | M Terminal | Inner conductor<br>内导体 | Brass (Sn plating)<br>黄铜 (镀锡)                             |
|                |            | Outer conductor<br>外导体 | 黄铜 (镀锡)                                                   |
|                | F Terminal | Inner conductor<br>内导体 | Heat resistant cooper-alloy<br>(Au plating)<br>耐热铜合金 (镀金) |
|                |            | Outer conductor<br>外导体 | Brass (Sn plating)<br>黄铜 (镀锡)                             |

(Note) AV wire = MAX. AVSS 0.5mm<sup>2</sup> (Terminal is TS 0.64 type: Ref. A-02).  
注) AV线 = 最大AVSS 0.5mm<sup>2</sup> (端子为TS0.64: 参照A-02)

Inner conductor terminal (mm) / 内导体端子 (毫米)

(M)

S (8230-5015) M (8230-5016) L (8230-5017)



(F)

S (8240-0276) M (8240-0277) L (8240-0278)



Outer conductor terminal (mm) / 外导体端子 (毫米)


(M)

S (8230-5481) M (8230-5482) L (8230-5484)



(F)

转 播 用 : S (8240-0382) M (8240-0383) F (8240-0619)  
无线电用 : S (8240-0387) M (8240-0388)

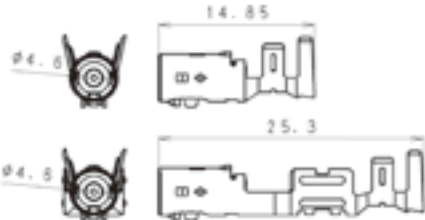

(Note) The terminal for radio can connect a condenser inside. On this occasion, a common crimping terminal is necessary.  
注) 无线电用端子内部可以连接电容器。此时需要共同的压接端子 (8110-4493)。

Applicable coaxial wire / 适用同轴线

| Applicable coaxial wire (Note 1)<br>适用同轴线 注1) | 1.5C-2V | 1.5C-2W | 1.5D-2V | 1.5D-2W | 2.5D |
|-----------------------------------------------|---------|---------|---------|---------|------|
| Inner conductor terminal<br>内导体端子             | S       | S       | M       | M       | L    |
| Outer conductor terminal<br>外导体端子             | S       | M       | S       | S       | F    |

(Note 1) For some coaxial wire and wire makers, it might be inapplicable. Please contact our sales representative for more details.  
注1) 由于各电线商家的同轴线不同, 是否适用请向敝公司的销售负责人询问。  
注2) 泡沫聚乙烯绝缘同轴线压接时需要使用套管。

# Housing (UNIT : mm)

接插件护套(毫米)


Ref: Terminal part No.  
端子参照页

coaxial wire                      M-03  
同轴线

AV wire                              A-02  
AV线


## 1way coaxial wire Rib R1

Color                      Blue  
颜色                      蓝



M (6098-7143)


F (6098-6321)



Color                      Blue  
颜色                      蓝


## 1way coaxial wire Rib L1

Color                      Gray  
颜色                      灰



M (6098-6835)


F (6098-6323)



Color                      Gray  
颜色                      灰


## 1way coaxial wire Rib R2

Color                      Black  
颜色                      黑



M (6098-7544)


F (6098-7445)



Color                      Black  
颜色                      黑


## 1way coaxial wire Rib L2

Color                      Natural  
颜色                      自然色



M (6098-7546)

F (6098-7446)



Color                      Natural  
颜色                      自然色

M-04

2 way coaxial wire + 1 way AV wire

Rib R

Color  
颜色

Gray  
灰

M (6098-6331)

Color  
颜色

Gray  
灰

F (6098-6336)

Color  
颜色

Gray  
灰

M (6098-6373)

2 way coaxial wire + 1 way AV wire

Rib L

Color  
颜色

Natural  
自然色

M (6098-6328)

Color  
颜色

Natural  
自然色

F (6098-6333)

Color  
颜色

Natural  
自然色

M (6098-6370)

2 way coaxial wire + 2 way AV wire

Rib R

Color  
颜色

Gray  
灰

F (6098-7153)

Color  
颜色

Gray  
灰

M (6098-7151)

2 way coaxial wire + 2 way AV wire

Rib L

Color  
颜色

Natural  
自然色

F (6098-7148)

Color  
颜色


Natural  
自然色

M (6098-7145)

3 way coaxial wire

Color  
颜色


Blue  
蓝



M (6098-6340)


Color  
颜色

Blue  
蓝



M (6098-6369)

F (6098-6343)




Color  
颜色

Blue  
蓝

3 way coaxial wire


Color  
颜色

Blue  
蓝



M (6098-6838)

F (6098-6841)




Color  
颜色

Blue  
蓝

4 way coaxial wire + 2 way AV wire


Color  
颜色

Natural  
自然色



M (6098-6844)

F (6098-6702)



Color  
颜色

Natural  
自然色

## 接插件护套(毫米)

接插件护套(毫米)

[illegible]


## 1 way coaxial wire

SMT Type (Rib R1)

## M (6098-7132)

Connector F part No.  
母端接插件产品号码 6098-6321 (M-04)


Color  
颜色 Blue  
蓝



● Detailed dimension  
详细尺寸



● Recommended dimension of  
Circuit board  
电路板推荐尺寸




## 1 way coaxial wire

SMT Type (Rib R2)

## M (6098-7449)

Connector F part No.  
母端接插件产品号码 6098-7445 (M-04)

Color  
颜色 Black  
黑



● Detailed dimension  
详细尺寸



● Recommended dimension of  
Circuit board  
电路板推荐尺寸



M-08


## 1 way coaxial wire

SMT Type (Rib L1)

## M (6098-7134)

Connector F part No.  
母端接插件产品号码 6098-6323 (M-04)

Color  
颜色 Gray  
灰



● Detailed dimension  
详细尺寸



● Recommended dimension of  
Circuit board  
电路板推荐尺寸




## 1 way coaxial wire

SMT Type (Rib L2)

## M (6098-7450)

Connector F part No.  
母端接插件产品号码 6098-7446 (M-04)

Color  
颜色 Natural  
自然色



● Detailed dimension  
详细尺寸



● Recommended dimension of  
Circuit board  
电路板推荐尺寸




# HFC III SERIES for RADIO

## 2 way coaxial wire + 1 way AV wire


Color  
颜色

Natural  
自然色



**M (6098-6861)**

**F (6098-6037)**



Color  
颜色

Natural  
自然色

## 2 way coaxial wire + 1 way AV wire


**M (6098-5761)**

Connector F part No.  
母端接插件产品号码

6098-6037 (M-09)


Color  
颜色

Natural  
自然色




## Through Hall Type

● Detailed dimension  
详细尺寸



● Recommended dimension of  
Circuit board  
电路板推荐尺寸



M-09

HFC III SERIES

# INDEX

| Part No.  | Page |
|-----------|------|
| 1500-0159 | L-03 |
| 1500-0166 | C-12 |
| 1500-0169 | L-03 |
| 5010-8627 | E-08 |
| 5011-1590 | E-08 |
| 5011-6687 | E-08 |
| 5011-6818 | E-12 |
| 5011-7740 | E-12 |
| 5011-7860 | E-12 |
| 6098-0149 | A-16 |
| 6098-0151 | A-16 |
| 6098-0154 | A-17 |
| 6098-0156 | A-17 |
| 6098-0323 | A-16 |
| 6098-0325 | A-16 |
| 6098-0441 | A-19 |
| 6098-0469 | A-16 |
| 6098-0471 | A-16 |
| 6098-0518 | A-16 |
| 6098-0822 | A-15 |
| 6098-0824 | A-15 |
| 6098-1104 | A-19 |
| 6098-1278 | A-19 |
| 6098-1373 | C-11 |
| 6098-1377 | C-11 |
| 6098-1378 | C-11 |
| 6098-1380 | C-11 |
| 6098-1489 | A-16 |
| 6098-1624 | K-06 |
| 6098-1626 | K-06 |
| 6098-1627 | I-07 |
| 6098-1714 | I-06 |
| 6098-1716 | A-16 |
| 6098-1744 | I-07 |
| 6098-1746 | I-07 |
| 6098-1747 | I-06 |
| 6098-1774 | I-06 |
| 6098-1851 | A-16 |
| 6098-2013 | K-05 |
| 6098-2101 | I-06 |
| 6098-2137 | A-19 |
| 6098-2158 | K-05 |
| 6098-2206 | K-06 |
| 6098-2208 | K-06 |
| 6098-2211 | A-16 |
| 6098-2289 | K-06 |
| 6098-2329 | G-11 |
| 6098-2679 | I-06 |

| Part No.  | Page |
|-----------|------|
| 6098-2680 | I-06 |
| 6098-2764 | C-08 |
| 6098-2779 | C-07 |
| 6098-2780 | C-07 |
| 6098-2781 | C-07 |
| 6098-2782 | C-07 |
| 6098-2784 | C-08 |
| 6098-2785 | C-08 |
| 6098-2786 | C-19 |
| 6098-2788 | C-08 |
| 6098-2789 | C-08 |
| 6098-3239 | C-22 |
| 6098-3369 | C-08 |
| 6098-3370 | C-19 |
| 6098-3449 | I-04 |
| 6098-3450 | I-10 |
| 6098-3452 | I-09 |
| 6098-3453 | I-04 |
| 6098-3456 | I-03 |
| 6098-3458 | I-10 |
| 6098-3563 | C-11 |
| 6098-3565 | C-20 |
| 6098-3567 | C-21 |
| 6098-3569 | C-21 |
| 6098-3571 | C-18 |
| 6098-3572 | C-22 |
| 6098-3600 | C-18 |
| 6098-3601 | C-18 |
| 6098-3616 | C-23 |
| 6098-3802 | A-04 |
| 6098-3810 | A-04 |
| 6098-3818 | A-22 |
| 6098-3826 | A-22 |
| 6098-3869 | A-04 |
| 6098-3877 | A-04 |
| 6098-3885 | A-05 |
| 6098-3893 | A-21 |
| 6098-3901 | A-22 |
| 6098-3909 | A-04 |
| 6098-3917 | A-04 |
| 6098-3925 | A-05 |
| 6098-3933 | A-21 |
| 6098-3941 | A-22 |
| 6098-4008 | A-05 |
| 6098-4010 | A-05 |
| 6098-4013 | A-05 |
| 6098-4015 | A-06 |
| 6098-4017 | C-19 |

| Part No.  | Page |
|-----------|------|
| 6098-4018 | C-23 |
| 6098-4050 | C-11 |
| 6098-4069 | C-10 |
| 6098-4071 | C-10 |
| 6098-4073 | C-10 |
| 6098-4075 | C-18 |
| 6098-4076 | C-18 |
| 6098-4333 | C-04 |
| 6098-4339 | C-04 |
| 6098-4367 | C-18 |
| 6098-4565 | K-03 |
| 6098-4567 | K-03 |
| 6098-4569 | K-03 |
| 6098-4588 | C-04 |
| 6098-4589 | C-04 |
| 6098-4590 | C-05 |
| 6098-4591 | C-16 |
| 6098-4594 | C-04 |
| 6098-4595 | C-04 |
| 6098-4596 | C-05 |
| 6098-4597 | C-16 |
| 6098-4640 | C-04 |
| 6098-4660 | C-20 |
| 6098-4661 | C-11 |
| 6098-4662 | C-11 |
| 6098-4663 | C-13 |
| 6098-4664 | C-11 |
| 6098-4666 | C-18 |
| 6098-4667 | C-13 |
| 6098-4669 | C-11 |
| 6098-4670 | C-11 |
| 6098-4675 | C-04 |
| 6098-4707 | C-17 |
| 6098-4725 | C-17 |
| 6098-4726 | C-17 |
| 6098-4740 | A-06 |
| 6098-4756 | A-05 |
| 6098-4831 | A-06 |
| 6098-4876 | I-04 |
| 6098-4877 | I-04 |
| 6098-4901 | C-10 |
| 6098-4902 | C-10 |
| 6098-4908 | C-16 |
| 6098-4943 | C-04 |
| 6098-4944 | C-03 |
| 6098-4971 | C-13 |
| 6098-4973 | C-14 |
| 6098-4974 | C-14 |

| Part No.  | Page |
|-----------|------|
| 6098-4975 | C-15 |
| 6098-4977 | C-15 |
| 6098-4978 | C-03 |
| 6098-4979 | C-04 |
| 6098-4982 | C-04 |
| 6098-5000 | C-04 |
| 6098-5049 | C-10 |
| 6098-5070 | C-03 |
| 6098-5071 | C-03 |
| 6098-5119 | C-13 |
| 6098-5120 | C-13 |
| 6098-5180 | C-16 |
| 6098-5217 | C-20 |
| 6098-5218 | C-20 |
| 6098-5267 | F-03 |
| 6098-5269 | F-03 |
| 6098-5271 | F-03 |
| 6098-5273 | F-04 |
| 6098-5275 | F-04 |
| 6098-5277 | F-04 |
| 6098-5279 | F-05 |
| 6098-5281 | F-05 |
| 6098-5283 | F-05 |
| 6098-5285 | F-05 |
| 6098-5287 | F-06 |
| 6098-5289 | F-06 |
| 6098-5291 | F-06 |
| 6098-5293 | F-06 |
| 6098-5295 | F-06 |
| 6098-5297 | F-06 |
| 6098-5310 | F-03 |
| 6098-5312 | F-04 |
| 6098-5585 | F-06 |
| 6098-5594 | A-21 |
| 6098-5604 | A-21 |
| 6098-5613 | A-21 |
| 6098-5622 | A-21 |
| 6098-5631 | A-21 |
| 6098-5641 | A-21 |
| 6098-5650 | A-20 |
| 6098-5659 | A-20 |
| 6098-5668 | A-09 |
| 6098-5677 | A-09 |
| 6098-5686 | A-09 |
| 6098-5695 | A-09 |
| 6098-5704 | A-09 |
| 6098-5713 | A-09 |
| 6098-5761 | M-09 |

| Part No.  | Page |
|-----------|------|
| 6098-5833 | C-03 |
| 6098-5888 | C-07 |
| 6098-5903 | A-22 |
| 6098-5988 | F-08 |
| 6098-5989 | F-08 |
| 6098-6037 | M-09 |
| 6098-6050 | A-09 |
| 6098-6053 | A-09 |
| 6098-6055 | A-20 |
| 6098-6083 | A-20 |
| 6098-6090 | A-20 |
| 6098-6097 | A-20 |
| 6098-6104 | A-20 |
| 6098-6111 | A-20 |
| 6098-6157 | M-07 |
| 6098-6159 | M-07 |
| 6098-6161 | C-16 |
| 6098-6162 | C-16 |
| 6098-6321 | M-04 |
| 6098-6323 | M-04 |
| 6098-6328 | M-05 |
| 6098-6331 | M-05 |
| 6098-6333 | M-05 |
| 6098-6336 | M-05 |
| 6098-6340 | M-06 |
| 6098-6343 | M-06 |
| 6098-6369 | M-06 |
| 6098-6370 | M-05 |
| 6098-6373 | M-05 |
| 6098-6451 | F-04 |
| 6098-6452 | F-04 |
| 6098-6455 | F-04 |
| 6098-6456 | F-04 |
| 6098-6457 | F-05 |
| 6098-6478 | C-16 |
| 6098-6522 | F-04 |
| 6098-6523 | F-04 |
| 6098-6524 | F-05 |
| 6098-6559 | C-17 |
| 6098-6562 | C-16 |
| 6098-6653 | A-04 |
| 6098-6662 | A-04 |
| 6098-6682 | A-05 |
| 6098-6688 | A-05 |
| 6098-6694 | A-05 |
| 6098-6700 | M-07 |
| 6098-6702 | M-06 |
| 6098-6790 | A-24 |

| Part No.  | Page |
|-----------|------|
| 6098-6793 | A-24 |
| 6098-6796 | A-25 |
| 6098-6798 | A-25 |
| 6098-6803 | A-25 |
| 6098-6805 | A-25 |
| 6098-6810 | A-26 |
| 6098-6835 | M-04 |
| 6098-6838 | M-06 |
| 6098-6841 | M-06 |
| 6098-6844 | M-06 |
| 6098-6848 | A-25 |
| 6098-6861 | M-09 |
| 6098-6869 | A-26 |
| 6098-7060 | F-05 |
| 6098-7061 | F-05 |
| 6098-7063 | F-03 |
| 6098-7066 | F-04 |
| 6098-7067 | F-04 |
| 6098-7099 | F-05 |
| 6098-7100 | F-05 |
| 6098-7102 | A-26 |
| 6098-7132 | M-08 |
| 6098-7134 | M-08 |
| 6098-7143 | M-04 |
| 6098-7145 | M-05 |
| 6098-7148 | M-05 |
| 6098-7151 | M-05 |
| 6098-7153 | M-05 |
| 6098-7229 | A-24 |
| 6098-7231 | A-05 |
| 6098-7241 | A-04 |
| 6098-7253 | F-08 |
| 6098-7254 | F-08 |
| 6098-7261 | F-08 |
| 6098-7336 | A-05 |
| 6098-7445 | M-04 |
| 6098-7446 | M-04 |
| 6098-7449 | M-08 |
| 6098-7450 | M-08 |
| 6098-7544 | M-04 |
| 6098-7546 | M-04 |
| 6098-8478 | I-06 |
| 6098-8480 | I-09 |
| 6098-8482 | I-04 |
| 6181-0381 | E-22 |
| 6181-0436 | J-07 |
| 6181-0437 | J-08 |
| 6181-0438 | J-08 |

| Part No.  | Page |
|-----------|------|
| 6181-0439 | J-08 |
| 6181-0440 | J-08 |
| 6181-0511 | G-09 |
| 6181-0512 | G-10 |
| 6181-0513 | G-09 |
| 6181-0514 | G-09 |
| 6181-0515 | G-08 |
| 6181-0516 | G-09 |
| 6181-0522 | G-10 |
| 6181-0532 | G-09 |
| 6181-0536 | G-09 |
| 6181-0613 | J-10 |
| 6181-0629 | J-05 |
| 6181-0664 | G-09 |
| 6181-0665 | G-09 |
| 6181-0666 | G-10 |
| 6181-0667 | G-10 |
| 6181-0668 | G-09 |
| 6181-0669 | G-09 |
| 6181-0670 | G-08 |
| 6181-0671 | G-09 |
| 6181-0803 | E-19 |
| 6181-6464 | E-21 |
| 6181-6465 | E-21 |
| 6181-6481 | D-04 |
| 6181-6492 | J-04 |
| 6181-6509 | J-04 |
| 6181-6614 | J-04 |
| 6181-6658 | H-03 |
| 6181-6783 | E-16 |
| 6181-6784 | E-16 |
| 6181-6785 | E-21 |
| 6181-6850 | E-16 |
| 6181-6851 | E-15 |
| 6181-6921 | E-22 |
| 6185-0862 | G-05 |
| 6185-0865 | G-05 |
| 6185-0866 | G-05 |
| 6185-0867 | G-05 |
| 6185-0868 | G-06 |
| 6185-0869 | G-05 |
| 6185-1101 | G-05 |
| 6185-1169 | G-06 |
| 6185-1171 | G-06 |
| 6185-4596 | E-21 |
| 6185-5175 | G-06 |
| 6185-5177 | G-06 |
| 6185-5179 | G-07 |

| Part No.  | Page |
|-----------|------|
| 6185-5181 | G-06 |
| 6188-0047 | B-15 |
| 6188-0049 | B-25 |
| 6188-0066 | B-17 |
| 6188-0067 | B-18 |
| 6188-0083 | B-21 |
| 6188-0091 | B-29 |
| 6188-0096 | B-25 |
| 6188-0099 | B-16 |
| 6188-0101 | B-29 |
| 6188-0108 | B-15 |
| 6188-0129 | B-22 |
| 6188-0141 | B-17 |
| 6188-0173 | B-18 |
| 6188-0175 | B-18 |
| 6188-0187 | B-29 |
| 6188-0209 | B-18 |
| 6188-0217 | B-17 |
| 6188-0221 | B-29 |
| 6188-0229 | B-16 |
| 6188-0259 | B-21 |
| 6188-0266 | B-15 |
| 6188-0282 | B-17 |
| 6188-0327 | B-18 |
| 6188-0415 | B-29 |
| 6188-0470 | B-16 |
| 6188-0472 | B-18 |
| 6188-0495 | L-06 |
| 6188-0517 | B-17 |
| 6188-0551 | G-05 |
| 6188-0552 | G-05 |
| 6188-0553 | G-05 |
| 6188-0554 | G-05 |
| 6188-0555 | G-06 |
| 6188-0556 | G-05 |
| 6188-0557 | G-06 |
| 6188-0558 | G-06 |
| 6188-0589 | E-04 |
| 6188-0590 | E-04 |
| 6188-0624 | B-16 |
| 6188-0657 | E-04 |
| 6188-0658 | E-05 |
| 6188-0660 | E-07 |
| 6188-0663 | G-05 |
| 6188-0696 | B-06 |
| 6188-0697 | E-09 |
| 6188-0698 | E-09 |
| 6188-0706 | B-06 |



# INDEX

| Part No.  | Page |
|-----------|------|
| 6188-0779 | B-06 |
| 6188-4739 | E-05 |
| 6188-4775 | D-03 |
| 6188-4776 | D-04 |
| 6188-4787 | E-08 |
| 6188-4789 | E-08 |
| 6188-4797 | B-05 |
| 6188-4908 | D-04 |
| 6188-4914 | B-06 |
| 6188-4920 | B-05 |
| 6188-5103 | B-27 |
| 6188-5295 | B-26 |
| 6188-5516 | B-10 |
| 6188-5539 | G-06 |
| 6188-5540 | G-06 |
| 6188-5542 | G-07 |
| 6188-5544 | G-06 |
| 6189-0100 | B-15 |
| 6189-0101 | B-25 |
| 6189-0126 | B-17 |
| 6189-0127 | B-18 |
| 6189-0143 | B-29 |
| 6189-0144 | B-29 |
| 6189-0145 | B-21 |
| 6189-0165 | B-22 |
| 6189-0166 | B-29 |
| 6189-0172 | B-25 |
| 6189-0179 | B-16 |
| 6189-0181 | B-29 |
| 6189-0199 | B-15 |
| 6189-0249 | B-15 |
| 6189-0264 | B-16 |
| 6189-0319 | B-18 |
| 6189-0323 | B-18 |
| 6189-0368 | B-18 |
| 6189-0372 | B-17 |
| 6189-0376 | B-29 |
| 6189-0381 | B-17 |
| 6189-0388 | B-16 |
| 6189-0413 | B-21 |
| 6189-0425 | B-21 |
| 6189-0443 | B-17 |
| 6189-0504 | B-18 |
| 6189-0552 | E-19 |
| 6189-0555 | E-22 |
| 6189-0566 | B-16 |
| 6189-0573 | B-16 |
| 6189-0591 | E-19 |

| Part No.  | Page |
|-----------|------|
| 6189-0593 | E-19 |
| 6189-0596 | E-19 |
| 6189-0611 | B-16 |
| 6189-0617 | E-19 |
| 6189-0629 | B-17 |
| 6189-0639 | J-07 |
| 6189-0640 | J-08 |
| 6189-0643 | J-08 |
| 6189-0648 | J-08 |
| 6189-0682 | B-16 |
| 6189-0685 | B-18 |
| 6189-0694 | B-17 |
| 6189-0715 | L-06 |
| 6189-0772 | G-11 |
| 6189-0773 | G-12 |
| 6189-0774 | G-12 |
| 6189-0775 | G-12 |
| 6189-0776 | G-12 |
| 6189-0777 | G-12 |
| 6189-0778 | G-12 |
| 6189-0855 | E-05 |
| 6189-0856 | B-25 |
| 6189-0887 | E-05 |
| 6189-0890 | E-04 |
| 6189-0891 | E-04 |
| 6189-0915 | J-10 |
| 6189-0928 | G-09 |
| 6189-0940 | E-04 |
| 6189-0950 | G-09 |
| 6189-0951 | G-08 |
| 6189-0954 | G-10 |
| 6189-0955 | G-10 |
| 6189-0968 | E-05 |
| 6189-1012 | E-05 |
| 6189-1046 | B-05 |
| 6189-1048 | B-27 |
| 6189-1050 | E-09 |
| 6189-1051 | E-09 |
| 6189-1073 | J-04 |
| 6189-1076 | J-04 |
| 6189-1081 | E-05 |
| 6189-1082 | E-07 |
|           | E-08 |
| 6189-1083 | B-06 |
| 6189-1092 | B-06 |
| 6189-1093 | G-12 |
| 6189-1094 | G-12 |
| 6189-1095 | G-12 |

| Part No.  | Page |
|-----------|------|
| 6189-1096 | G-12 |
| 6189-1097 | G-12 |
| 6189-1104 | G-09 |
| 6189-1107 | G-08 |
| 6189-1108 | G-10 |
| 6189-1109 | G-10 |
| 6189-1115 | J-04 |
| 6189-1128 | B-06 |
| 6189-1129 | B-05 |
| 6189-1132 | B-05 |
| 6189-1133 | B-06 |
| 6189-1134 | B-06 |
| 6189-1135 | B-07 |
| 6189-1136 | B-27 |
| 6189-1142 | B-06 |
| 6189-1144 | J-05 |
| 6189-1147 | J-05 |
| 6189-1149 | J-05 |
| 6189-1150 | J-05 |
| 6189-1160 | B-27 |
| 6189-1161 | B-05 |
| 6189-1231 | B-05 |
| 6189-1240 | B-06 |
| 6189-6863 | E-21 |
| 6189-6894 | B-27 |
| 6189-6906 | D-04 |
| 6189-6909 | D-04 |
| 6189-6914 | E-08 |
| 6189-6934 | B-26 |
| 6189-6953 | B-25 |
| 6189-6978 | B-27 |
| 6189-6979 | B-27 |
| 6189-6980 | B-27 |
| 6189-6981 | B-27 |
| 6189-6987 | B-07 |
| 6189-7020 | B-05 |
| 6189-7036 | D-03 |
| 6189-7037 | D-03 |
| 6189-7039 | D-04 |
| 6189-7040 | D-04 |
| 6189-7052 | D-03 |
| 6189-7058 | D-03 |
| 6189-7073 | B-05 |
| 6189-7077 | B-26 |
| 6189-7094 | B-28 |
| 6189-7100 | B-06 |
| 6189-7110 | B-07 |
| 6189-7115 | J-05 |

| Part No.  | Page |
|-----------|------|
| 6189-7156 | B-30 |
| 6189-7167 | B-07 |
| 6189-7188 | H-03 |
| 6189-7189 | H-03 |
| 6189-7190 | H-03 |
| 6189-7214 | H-03 |
| 6189-7256 | B-26 |
| 6189-7262 | J-05 |
| 6189-7263 | E-12 |
| 6189-7264 | E-12 |
| 6189-7393 | G-13 |
| 6189-7398 | B-17 |
| 6189-7401 | B-05 |
| 6189-7408 | E-15 |
| 6189-7409 | E-16 |
| 6189-7410 | E-16 |
| 6189-7411 | E-21 |
| 6189-7423 | E-16 |
| 6189-7426 | B-27 |
| 6189-7433 | B-11 |
| 6189-7434 | B-11 |
| 6189-7435 | B-11 |
| 6189-7436 | B-11 |
| 6189-7449 | B-10 |
| 6189-7469 | G-12 |
| 6189-7470 | G-12 |
| 6189-7471 | G-12 |
| 6189-7494 | E-16 |
| 6189-7546 | B-11 |
| 6189-7547 | B-11 |
| 6189-7567 | E-22 |
| 6189-7691 | B-26 |
| 6189-7710 | G-12 |
| 6189-7711 | G-12 |
| 6189-7713 | G-12 |
| 6189-7714 | G-12 |
| 6189-7716 | G-12 |
| 6189-7717 | G-12 |
| 6189-7756 | G-09 |
| 6189-7757 | G-09 |
| 6189-7758 | G-09 |
| 6189-7759 | G-09 |
| 6189-7760 | G-09 |
| 6189-7761 | G-09 |
| 6189-7762 | G-09 |
| 6189-7763 | G-09 |
| 6189-7784 | J-08 |
| 6189-7809 | B-28 |

| Part No.  | Page |
|-----------|------|
| 6195-0003 | L-05 |
| 6195-0006 | L-05 |
| 6195-0009 | L-05 |
| 6195-0012 | L-05 |
| 6195-0015 | L-05 |
| 6195-0018 | L-05 |
| 6195-0021 | L-05 |
| 6195-0024 | L-05 |
| 6195-0051 | L-06 |
| 6195-0054 | L-06 |
| 6195-0066 | L-05 |
| 6195-0149 | L-06 |
| 6195-0152 | L-06 |
| 6195-0164 | L-06 |
| 6195-0167 | L-06 |
| 6195-0240 | L-05 |
| 6240-1033 | A-13 |
| 6240-1077 | A-12 |
| 6240-1093 | A-19 |
| 6240-1107 | A-12 |
| 6240-1120 | A-12 |
| 6240-1122 | A-13 |
| 6240-1158 | A-13 |
| 6240-5035 | A-13 |
| 6240-5088 | A-13 |
| 6240-5118 | A-12 |
| 6240-5175 | A-13 |
| 6240-5337 | I-06 |
| 6240-5339 | I-06 |
| 6240-5378 | C-11 |
| 6241-0241 | A-23 |
| 6241-0261 | A-22 |
| 6241-0281 | A-23 |
| 6245-0261 | A-23 |
| 6245-0281 | A-22 |
| 6245-0301 | A-23 |
| 6248-5270 | A-12 |
| 6248-5275 | A-13 |
| 6248-5276 | A-13 |
| 6248-5309 | K-08 |
| 6248-5310 | K-08 |
| 6248-5311 | K-08 |
| 6249-1229 | A-12 |
| 6249-1234 | A-13 |
| 6249-1235 | A-13 |
| 6249-1243 | A-12 |
| 6249-1248 | K-08 |
| 6249-1249 | K-08 |

| Part No.  | Page |
|-----------|------|
| 6249-1250 | K-08 |
| 6249-1251 | K-08 |
| 6249-1252 | K-08 |
| 6249-1253 | K-08 |
| 6249-1265 | K-08 |
| 6249-1266 | K-08 |
| 6520-0549 | A-12 |
| 6520-0550 | A-12 |
| 6520-1004 | A-13 |
| 6520-1009 | A-13 |
| 6520-1466 | A-19 |
| 6810-1203 | C-24 |
| 6810-1204 | C-24 |
| 6810-1217 | C-24 |
| 6810-1462 | C-24 |
| 6810-1584 | J-11 |
| 6810-1584 | L-07 |
| 6810-2653 | L-07 |
| 6810-4982 | J-11 |
| 6910-0119 | C-24 |
| 6910-0120 | C-24 |
| 6911-5774 | B-11 |
| 6911-5948 | B-28 |
| 6914-0050 | E-07 |
| 6914-0127 | E-11 |
| 6918-1260 | E-19 |
| 6918-1263 | E-22 |
| 6918-1267 | E-22 |
| 6918-1370 | E-19 |
| 6918-1371 | E-19 |
| 6918-1469 | E-19 |
| 6918-1594 | G-11 |
| 6918-1594 | G-12 |
| 6918-1595 | G-12 |
| 6918-1596 | G-12 |
| 6918-1597 | G-13 |
| 6918-1598 | G-09 |
| 6918-1599 | G-09 |
| 6918-1600 | G-09 |
| 6918-1601 | G-09 |
| 6918-1602 | G-10 |
| 6918-1603 | G-10 |
| 6918-1604 | G-12 |
| 6918-1636 | G-11 |
| 6918-1651 | G-08 |
| 6918-1651 | G-09 |
| 6918-1652 | G-09 |
| 6918-1653 | G-08 |

| Part No.  | Page |
|-----------|------|
| 6918-1653 | G-09 |
| 6918-1654 | G-09 |
| 6918-1762 | E-05 |
| 6918-1773 | G-05 |
| 6918-1774 | G-05 |
| 6918-1775 | G-05 |
| 6918-1775 | G-06 |
| 6918-1776 | G-06 |
| 6918-1779 | G-06 |
| 6918-1780 | G-06 |
| 6918-1780 | G-07 |
| 6918-1833 | D-03 |
| 6918-1833 | E-05 |
| 6918-1835 | D-03 |
| 6918-1835 | E-04 |
| 6918-1979 | E-04 |
| 6918-2056 | E-05 |
| 6918-2103 | E-09 |
| 6918-2104 | E-09 |
| 6918-2128 | D-04 |
| 6918-2128 | E-05 |
| 6918-2131 | E-07 |
| 6918-2132 | E-07 |
| 6918-2132 | E-08 |
| 6918-2665 | E-19 |
| 6918-2804 | D-04 |
| 6918-2806 | D-04 |
| 6918-2810 | D-04 |
| 6918-2913 | D-04 |
| 6918-3166 | E-12 |
| 6920-0861 | E-09 |
| 6920-0884 | E-09 |
| 6920-0886 | E-09 |
| 6920-2376 | E-09 |
| 6920-2377 | E-09 |
| 6920-2446 | E-09 |
| 6950-1054 | C-20 |
| 6950-1055 | C-20 |
| 6950-1056 | C-20 |
| 7160-9465 | B-15 |
| 7161-9787 | B-15 |
| 7161-9787 | J-04 |
| 7161-9787 | L-04 |
| 7165-0118 | L-04 |
| 7165-0119 | L-04 |
| 7165-0130 | E-20 |
| 7165-0131 | E-21 |
| 7165-0145 | B-21 |

| Part No.  | Page |
|-----------|------|
| 7165-0147 | E-21 |
| 7165-0148 | E-21 |
| 7165-0172 | E-20 |
| 7165-0180 | B-25 |
| 7165-0180 | J-10 |
| 7165-0193 | E-07 |
| 7165-0193 | E-18 |
| 7165-0193 | H-03 |
| 7165-0193 | J-04 |
| 7165-0193 | J-07 |
| 7165-0193 | L-04 |
| 7165-0194 | E-18 |
| 7165-0198 | E-18 |
| 7165-0210 | L-04 |
| 7165-0342 | B-14 |
| 7165-0343 | B-14 |
| 7165-0344 | B-14 |
| 7165-0346 | B-20 |
| 7165-0347 | B-20 |
| 7165-0348 | B-20 |
| 7165-0349 | B-14 |
| 7165-0351 | B-14 |
| 7165-0356 | B-20 |
| 7165-0385 | E-18 |
| 7165-0392 | B-24 |
| 7165-0392 | J-10 |
| 7165-0393 | B-24 |
| 7165-0393 | J-10 |
| 7165-0395 | B-14 |
| 7165-0400 | B-24 |
| 7165-0400 | J-10 |
| 7165-0432 | D-03 |
| 7165-0432 | E-04 |
| 7165-0471 | G-04 |
| 7165-0472 | G-04 |
| 7165-0473 | G-04 |
| 7165-0474 | G-04 |
| 7165-0514 | H-02 |
| 7165-0514 | J-04 |
| 7165-0514 | J-07 |
| 7165-0515 | H-02 |
| 7165-0515 | J-04 |
| 7165-0515 | J-07 |
| 7165-0516 | H-02 |
| 7165-0516 | J-04 |
| 7165-0516 | J-07 |
| 7165-0621 | D-02 |
| 7165-0621 | E-03 |

# INDEX

| Part No.  | Page         |
|-----------|--------------|
| 7165-0622 | D-02<br>E-03 |
| 7165-0683 | B-24         |
| 7165-0683 | J-10         |
| 7165-0797 | B-04         |
| 7165-0842 | B-14         |
| 7165-1043 | B-04         |
| 7165-1075 | D-02<br>E-03 |
| 7165-1131 | G-04         |
| 7165-1198 | B-04         |
| 7165-1199 | B-04         |
| 7165-1312 | B-04         |
| 7165-1423 | B-04         |
| 7165-1562 | E-14         |
| 7165-1563 | E-15         |
| 7165-1564 | E-15         |
| 7165-1565 | E-15         |
| 7165-1566 | E-15         |
| 7165-1605 | B-10         |
| 7165-1606 | B-09         |
| 7165-1607 | B-09         |
| 7165-1608 | B-09         |
| 8100-0451 | B-23         |
| 8100-0452 | B-24         |
| 8100-0457 | B-13         |
| 8100-0458 | B-13         |
| 8100-0459 | B-13         |
| 8100-0460 | B-13         |
| 8100-0461 | B-13         |
| 8100-0462 | B-13         |
| 8100-0463 | B-19<br>E-20 |
| 8100-0464 | B-20<br>E-20 |
| 8100-0465 | B-20<br>E-20 |
| 8100-0466 | B-19         |
| 8100-0467 | B-20         |
| 8100-0468 | B-20<br>E-20 |
| 8100-0506 | B-23         |
| 8100-0507 | B-24         |
| 8100-0508 | B-24         |
| 8100-0520 | A-18<br>C-21 |
| 8100-0521 | A-19<br>C-21 |

| Part No.  | Page                 |
|-----------|----------------------|
| 8100-0522 | A-19<br>C-21         |
| 8100-0594 | B-13                 |
| 8100-0606 | C-12                 |
| 8100-0660 | E-20                 |
| 8100-0661 | E-20                 |
| 8100-0664 | C-12                 |
| 8100-0706 | C-21                 |
| 8100-0707 | A-18<br>C-21         |
| 8100-0782 | C-12                 |
| 8100-0817 | B-13                 |
| 8100-1007 | B-13                 |
| 8100-1008 | B-13                 |
| 8100-1340 | B-13                 |
| 8100-1341 | A-11                 |
| 8100-1342 | A-11                 |
| 8100-1344 | B-13                 |
| 8100-1346 | A-11                 |
| 8100-1347 | A-11                 |
| 8100-1427 | H-02<br>J-06<br>L-03 |
| 8100-1428 | H-02<br>J-06<br>L-03 |
| 8100-1429 | H-02<br>J-06<br>L-03 |
| 8100-1458 | L-03                 |
| 8100-1459 | L-03                 |
| 8100-1460 | L-03                 |
| 8100-1470 | C-09                 |
| 8100-1471 | C-10                 |
| 8100-1472 | C-10                 |
| 8100-1506 | C-12                 |
| 8100-1507 | C-12                 |
| 8100-1553 | A-19<br>C-21         |
| 8100-1555 | A-15                 |
| 8100-1571 | C-09                 |
| 8100-1572 | C-10                 |
| 8100-1573 | C-10                 |
| 8100-1710 | K-05                 |
| 8100-2493 | A-19                 |
| 8100-2512 | K-05                 |
| 8100-2513 | K-05                 |
| 8100-2514 | K-05                 |

| Part No.  | Page         |
|-----------|--------------|
| 8100-2971 | C-07         |
| 8100-2972 | C-07         |
| 8100-2980 | B-24         |
| 8100-3067 | D-02<br>E-03 |
| 8100-3068 | D-02<br>E-03 |
| 8100-3082 | E-07         |
| 8100-3083 | E-07         |
| 8100-3177 | D-02<br>E-03 |
| 8100-3178 | D-02<br>E-03 |
| 8100-3257 | J-10         |
| 8100-3258 | J-10         |
| 8100-3259 | J-10         |
| 8100-3260 | J-10         |
| 8100-3382 | I-03         |
| 8100-3383 | I-03         |
| 8100-3384 | I-03         |
| 8100-3385 | I-08         |
| 8100-3386 | I-09         |
| 8100-3387 | I-09         |
| 8100-3388 | J-03         |
| 8100-3389 | J-03         |
| 8100-3390 | J-03         |
| 8100-3391 | I-03         |
| 8100-3392 | I-03         |
| 8100-3393 | I-03         |
| 8100-3394 | I-08         |
| 8100-3395 | I-09         |
| 8100-3396 | I-09         |
| 8100-3397 | J-03         |
| 8100-3398 | J-03         |
| 8100-3399 | J-03         |
| 8100-3402 | J-03         |
| 8100-3403 | J-03         |
| 8100-3455 | B-03         |
| 8100-3456 | B-03         |
| 8100-3504 | J-03         |
| 8100-3507 | E-07         |
| 8100-3508 | E-07         |
| 8100-3617 | B-03         |
| 8100-3622 | A-03         |
| 8100-3623 | A-03         |
| 8100-3624 | A-03         |
| 8100-3625 | A-03         |
| 8100-3626 | A-03         |

| Part No.  | Page                         |
|-----------|------------------------------|
| 8100-3627 | A-03                         |
| 8100-3628 | A-03                         |
| 8100-3629 | A-03                         |
| 8100-3708 | B-03                         |
| 8100-3803 | G-03                         |
| 8100-3804 | G-03                         |
| 8100-3805 | G-03                         |
| 8100-3806 | G-03                         |
| 8100-4027 | C-03<br>K-02                 |
| 8100-4028 | C-03<br>K-02                 |
| 8100-4029 | C-03<br>K-02                 |
| 8100-4030 | C-03<br>K-02                 |
| 8100-4172 | G-03                         |
| 8100-4173 | G-03                         |
| 8100-4307 | C-07                         |
| 8100-4308 | C-07                         |
| 8230-4472 | E-17<br>H-02<br>J-06<br>L-03 |
| 8230-4492 | A-11<br>I-05<br>K-07         |
| 8230-4502 | A-11<br>I-05<br>K-07         |
| 8230-4512 | A-11<br>I-05<br>K-07         |
| 8230-4522 | A-15                         |
| 8230-4532 | A-15                         |
| 8230-4542 | A-15                         |
| 8230-4552 | E-17<br>H-02<br>J-06<br>L-03 |
| 8230-4562 | E-17<br>H-02<br>J-06<br>L-03 |
| 8230-4742 | A-10                         |
| 8230-4878 | A-03                         |
| 8230-4883 | I-03                         |
| 8230-4923 | A-08                         |

| Part No.  | Page |
|-----------|------|
| 8230-4924 | A-08 |
| 8230-4925 | A-08 |
| 8230-5015 | M-03 |
| 8230-5016 | M-03 |
| 8230-5017 | M-03 |
| 8230-5136 | A-03 |
| 8230-5168 | F-07 |
| 8230-5169 | F-07 |
| 8230-5170 | F-07 |
| 8230-5171 | F-08 |
| 8230-5172 | F-08 |
| 8230-5306 | E-14 |
| 8230-5307 | E-14 |
| 8230-5308 | E-14 |
| 8230-5309 | E-14 |
| 8230-5360 | B-09 |
| 8230-5361 | B-09 |
| 8230-5379 | F-03 |
| 8230-5380 | F-03 |
| 8230-5481 | M-03 |
| 8230-5482 | M-03 |
| 8230-5484 | M-03 |
| 8240-0029 | A-10 |
| 8240-0135 | I-03 |
| 8240-0152 | C-14 |
| 8240-0153 | C-14 |
| 8240-0154 | C-14 |
| 8240-0182 | A-03 |
| 8240-0213 | A-08 |
| 8240-0214 | A-08 |
| 8240-0215 | A-08 |
| 8240-0263 | G-03 |
| 8240-0264 | G-03 |
| 8240-0265 | G-03 |
| 8240-0266 | G-03 |
| 8240-0267 | G-03 |
| 8240-0268 | G-03 |
| 8240-0276 | M-03 |
| 8240-0277 | M-03 |
| 8240-0278 | M-03 |
| 8240-0279 | A-08 |
| 8240-0287 | B-03 |
| 8240-0288 | B-03 |
| 8240-0300 | K-05 |
| 8240-0336 | B-03 |
| 8240-0337 | B-03 |
| 8240-0338 | A-03 |
| 8240-0339 | A-08 |

| Part No.  | Page                 |
|-----------|----------------------|
| 8240-0367 | F-07                 |
| 8240-0368 | F-07                 |
| 8240-0369 | F-07                 |
| 8240-0370 | F-08                 |
| 8240-0371 | F-08                 |
| 8240-0382 | M-03                 |
| 8240-0383 | M-03                 |
| 8240-0385 | M-03                 |
| 8240-0387 | M-03                 |
| 8240-0388 | M-03                 |
| 8240-0408 | E-10                 |
| 8240-0409 | E-11                 |
| 8240-0410 | E-11                 |
| 8240-0411 | E-11                 |
| 8240-0412 | E-11                 |
| 8240-0489 | E-14                 |
| 8240-0490 | E-14                 |
| 8240-0491 | E-14                 |
| 8240-0492 | E-14                 |
| 8240-0500 | B-09                 |
| 8240-0501 | B-09                 |
| 8240-0523 | F-03                 |
| 8240-0552 | F-03                 |
| 8240-4862 | E-17                 |
| 8240-4882 | A-11<br>I-05<br>K-07 |
| 8240-4892 | A-11<br>I-05<br>K-07 |
| 8240-4912 | A-15                 |
| 8240-4922 | A-15                 |
| 8240-4932 | A-15                 |
| 8240-4942 | A-11<br>I-05<br>K-07 |
| 8240-4952 | E-18                 |
| 8240-4992 | E-18                 |



## WARNING

**Which may result in overheating or fire.**

**可能造成发热、起火!**

**Do not exceed prescribed current to the connectors.**  
**Do not use a broken or cracked housing.**  
**Do not use a deformed or rusty terminal.**

- 请不要使用超出规定的电流值。
- 请不要使用有破损的或裂缝的接插件护套。
- 请不要使用变形的或已生锈的端子。

## CAUTION

### Precautions for Selection and Use of Connectors

#### 选定、使用接插件时的注意事项

- To select a suitable connector, please consult with our sales staff about operating environment, mounting conditions, and other information (e.g. unsealed type for indoor compartment use, sealed type for engine compartment use).
- The performance of a connector may significantly vary depending on changes in variable elements in the operating environment, such as the number of ways, wire size, ambient temperature, etc.  
For detailed electrical characteristics of each product, see the "Specifications" of the relevant series.
- We have "Specifications" for connector performance and "Instruction Manuals" for connector usage, handling, and precautions, which are available for each connector series. Please be sure to read these in advance to select the appropriate connector and to use it correctly.
- Some connector series require special attention during circuit checks, etc.
- Although some connector specifications include drawings showing mating support, these drawings are provided only for reference. The manufacture of mating parts is not possible without consideration to dimensional tolerances, etc.
- This catalogue include the parts that was designed and developed jointly with a customer and require prior approval before sales. Please contact our sales staff for details.
- 选定接插件时，针对使用环境、组装条件等问题，请与弊公司销售负责人商量以便选择出适合用途的产品（例如：室内选择非防水性的，发动机仓内选择防水性的等）。
- 接插件的性能的数值受极数、使用电线大小、周围温度等各种使用环境因素的影响，会产生很大的变化。  
有关各产品的详细电流特性，请确认各系列的「式样书」。
- 本公司备有各系列接插件性能相关的「式样书」和接插件使用方法、处理方法、注意点相关的「使用说明书」。选定、使用接插件时，请务必阅读并正确使用。
- 针对不同系列的接插件，有需要注意导通检查的情况。
- 在产品目录中虽然有一部分接插件固定用支架以及对接端的内容，但仅为参考图使用，不可忽略相关的尺寸公差，随意制造对接端。
- 在产品目录中有一部分是与客户共同开发的产品。如需销售给别的客户时，需要事先得到其允许，具体事宜请向弊公司销售负责人询问。

\*Product specifications may be subject to change without notice.  
Before using the product, please obtain a "customer drawing" "Specifications" "Instruction Manuals" from our sales staff.  
Please contact our sales staff for details.

※※ 产品式样变更时可能不另行告知。  
使用产品时，请向敝公司销售负责人索取「客户用图纸」「仕様书」「使用说明书」。  
对上述相关详细内容，请向敝公司销售负责人询问。

# 住友电装集团

## 住电装贸易(上海)有限公司

中国上海市长宁区遵义路100号  
虹桥上海城B栋1503-1506室  
邮政编码 200051  
电话 021-20286588 传真 021-20243251



Sumitomo Wiring Systems, Ltd.

### ■总公司

三重县四日市市滨田町5番28号  
邮政编码 510-8528  
电话 (059) 354-6200 传真 (059) 354-6318

### ■总公司东京

东京都港区元赤坂1丁目3番13号 (赤坂中心大厦11楼)  
邮政编码 107-0051  
电话 (03) 6384-5600 传真 (03) 6384-5601

### 销售部门一览

#### 日本国内营业统辖部

名古屋营业部  
名古屋市西区牛岛町6番1号 (名古屋朗讯大厦17楼)  
邮政编码 451-6025  
电话 (052) 582-6222 传真 (052) 582-6228

东京营业部  
东京都港区元赤坂1丁目3番13号 (赤坂中心大厦11楼)  
邮政编码 107-0051  
电话 (03) 6384-5604 传真 (03) 6384-5608

大阪营业部  
大阪府中央区今桥4丁目3番18号 (HK今桥大厦3楼)  
邮政编码 541-0042  
电话 (06) 6229-1960 传真 (06) 6229-1965

#### 外营业统辖部

海外事业推进部  
名古屋市西区牛岛町6番1号 (名古屋朗讯大厦17楼)  
邮政编码 451-6025  
电话 (052) 582-6224 传真 (052) 582-6272

开发营业部  
东京都港区元赤坂1丁目3番13号 (赤坂中心大厦11楼)  
邮政编码 107-0051  
电话 (03) 6384-5609 传真 (03) 6384-5610

### Global Network-Sales Office Locations-

**Sumitomo Wiring Systems (U.S.A.) Inc. 「U.S.A.」 [SWS-USA]**  
39555 Orchard Hill Place Suite L60 Novi, MI 48375-5523 U.S.A.  
TEL (1) 248-347-9450 FAX (1) 248-347-9451

**SWS China Ltd. 「China」 [SWS-C]**  
Room 1503-1506, Tower B, City Center of Shanghai, 100 Zunyi Rd.,  
Shanghai, China 200051  
TEL (86) 21-2028-6588 FAX (86) 21-2024-3251

**Hong Kong Wiring Systems, Ltd. 「China」 [HKWS]**  
Suites 1701-06, 17th Floor, Chinachem Tsuen Wan Plaza,  
455-457 Castle Peak Road, Tsuen Wan, N.T., HongKong  
TEL (852) 2411-0806 FAX (852) 2413-6098

**SWS-Korea Co., Ltd. 「Korea」 [SWS-K]**  
402, 8 Seongnam-daero 331beon-gil, Bundang-gu,  
Seongnam-si, Gyeonggi-do, Korea 13558  
TEL (82) 31-719-9710 FAX (82) 31-719-9719

**SWS Sales & Marketing (Thailand) Co., Ltd. 「Thailand」 [SWS-T]**  
33/4 The 9th Towers, Grand Rama 9, Tower A, 15th Fl., Rama Rd.,  
Huaykwang, Huaykwang, Bangkok 10310 Thailand  
TEL (66) 02-001-4301-9 FAX (66) 02-001-4310

**SEWS-Components & Electronics Europe, KFT. 「Hungary」 [SEWS-CEKFT]**  
BILK Ipari Park, Europe U, 12/Building L1 Budapest 1239, Hungary  
TEL (36) 1889-0500 FAX (36) 1889-0501

URL: <http://www.sws.co.jp>