

3

2

1


PART NO. AND CH. CODE	$\Delta W_{100.4}$	$\Delta W_{200.4}$	ΔH_1	ΔH_2	X	A	B	WIRE SIZE
Δ 7116-4025 () (7B16-4025)	2.30	5.20	(2.19)	(4.21)	0.50	12.50	3.00	AVS 0.3~AVS 0.5 EQUIVALENT
Δ 7116-4026 () (7B16-4026)	3.00	5.30	(2.91)	(4.08)	0.80	12.50	3.00	AVS 0.5~AVS 1.25 EQUIVALENT
Δ 7116-4027 () (7B16-4027)	4.20	6.00	(4.06)	(5.09)	1.00	13.00	2.00	AVSS 2 EQUIVALENT

注記

- Δ 1. () 内品番は、エアバック回路及び
特別管理回路に使用する場合に適用すること。
- Δ 2. 適用ゴム製品番： 7158-3006-90 ETC.
- Δ 3. 嵌合スターミナル： 7114-4025 ETC. (7B14-4025 ETC.)


NOTES

- Δ 1. PART NUMBERS IN PARENTHESIS SHALL BE USED FOR
AIR BAG (A/B) CIRCUITS AND OTHER CIRCUITS
DESIGNATED FOR SPECIAL MONITORING.
- Δ 2. APPLICABLE RUBBER STOPPER NO. : 7158-3006-90 ETC.
- Δ 3. MATING MALE TERMINAL : 7114-4025 ETC. (7B14-4025 ETC.)

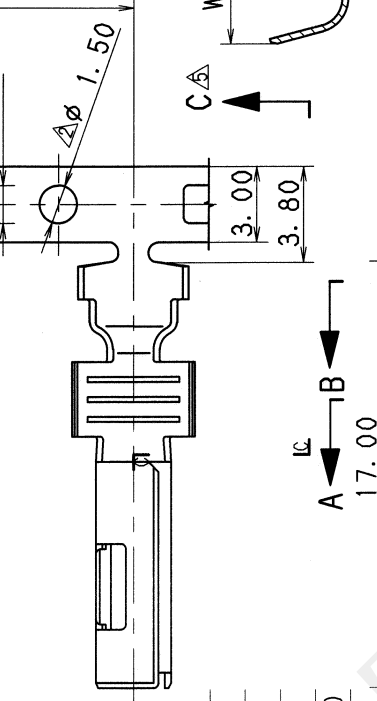C Δ 

SEC. A-A

SEC. B-B



LET	DATE	REVISION RECORD	NO.	CHKD	Y. S	T. M	H. K	S. S	T. O
Δ	05/11/10	CHANGED PART NAME ETC.	C05-ZF20						
Δ	00/11/08	CHANGED FORM & DIMENSION	C00-M342						
Δ	98/07/14	ADDED DIMENSION	C97-N456						
Δ	97/05/26	CHANGED FORM & ADDED A/B PART NO.	C97-L981						
Δ	96/01/09	CHANGED DIMENSION	C95-M905						
Δ	88/07/18	NEW	8MC-0809						
GENERAL TOLERANCE									
10MAX 50MAX 100MAX 250MAX 1250MAX 1									
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1		
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15		
SPECIFIED									
MASS									
g									

CUSTOMER	CUSTOMER PART NO.	CUSTOMER DWG NO.	MATL. SPEC.	COPPER ALLOY (t=0.25)	TREAT. & FIN.	TIN PLATING	ISSUE MARK
OFFICE			NAME	2. 3 II SEALED TERMINAL			
VENDOR		TRIAL PART NO.		FEMALE			
VENDOR NO.							
DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	7116-4025 ETC. (7B16-4025 ETC.)
R	NEW	88/07/12	mm	5:1	3	CH. CODE	
APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO.	
山梨	1712	宝	長田	M. TSUJI	O. DAR	SET DWG NO.	
05/11/25	05/11/24	05/11/28	05/11/28	05/11/28	05/11/28	YAZAKI CORPORATION	

3

2

1