

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

©

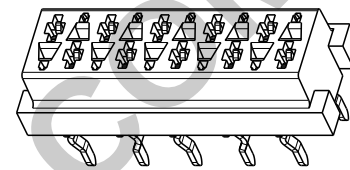
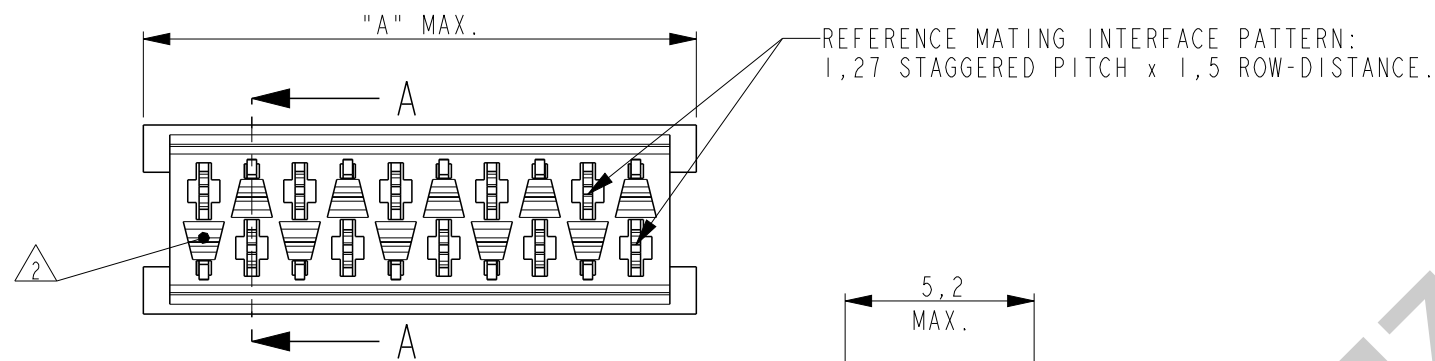
COPYRIGHT -

BY -

ALL RIGHTS RESERVED.

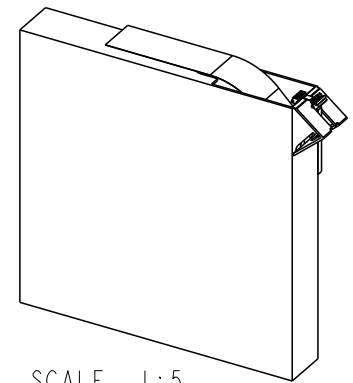
REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	YI	ADHESIVE TAPE WIDTH DIMENSION REMOVED	04FEB2016	SS	PS

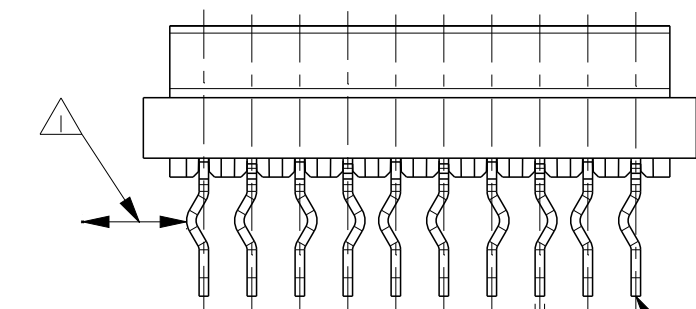


SCALE 3:1

PARTNUMBER BOX PACKAGING	PARTNUMBER REEL PACKAGING	NR OF POS "n"	DIMENSION "A" MAX
7-215079-4	215079-4	4	7,1
7-215079-6	215079-6	6	9,7
7-215079-8	215079-8	8	12,2
8-215079-0	1-215079-0	10	14,7
8-215079-2	1-215079-2	12	17,3
8-215079-4	1-215079-4	14	19,8
8-215079-6	1-215079-6	16	22,4
8-215079-8	1-215079-8	18	24,9
9-215079-0	2-215079-0	20	27,4




SCALE 1:5

BOX PACKAGING
250 CONNECTORS PER BOX
FOR ALL PARTNUMBERS

3,1±0,2

4±0,2

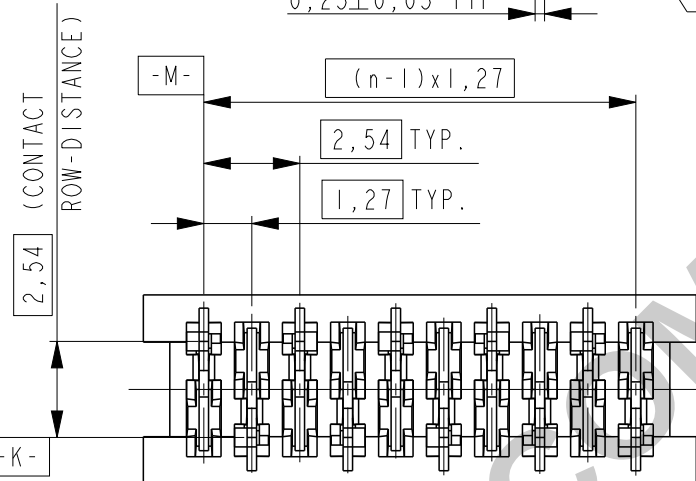
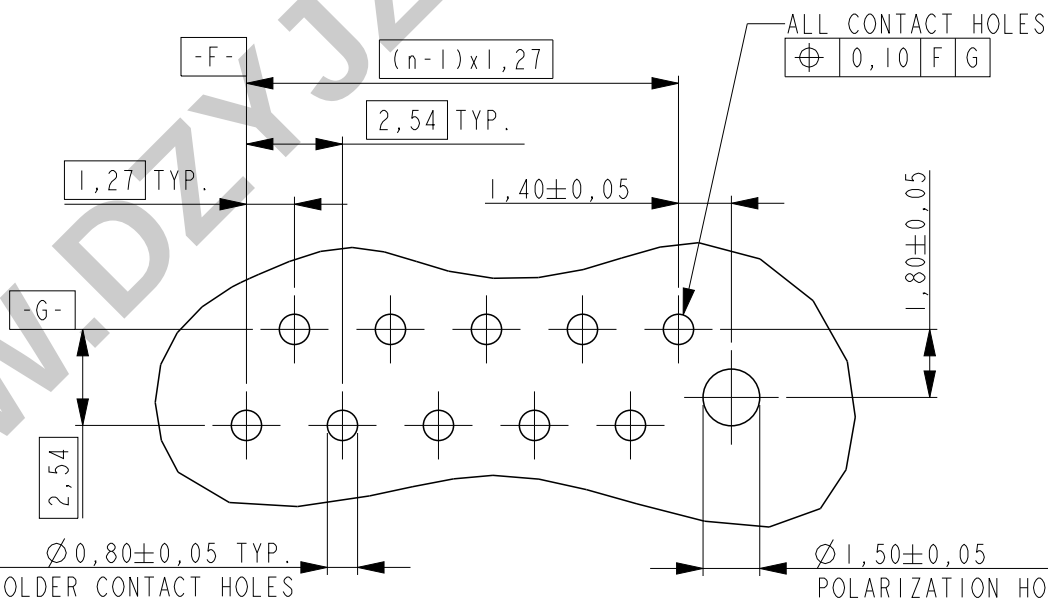
0,5±0,1
TYP

0,25±0,05 TYP

ALL CONTACTS

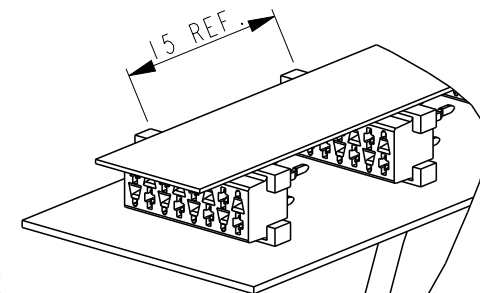
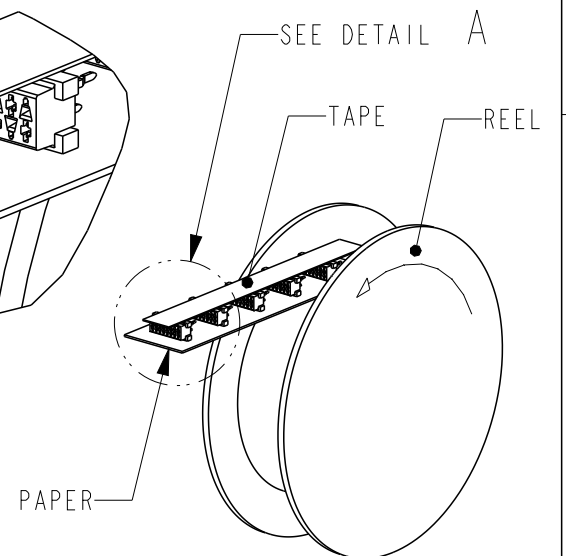
⊕ 0,40 K M

SECTION A - A

PC-BOARD HOLE LAYOUT
(COMPONENT SIDE OF BOARD SHOWN)ALL CONTACT HOLES
⊕ 0,10 F G

NOTES:

- IN EACH ROW, DIRECTION OF KINKS STARTS RANDOM.
IN EACH ROW, SEQUENTIAL CONTACTS HAVE OPPOSITE KINK DIRECTIONS.
- CORING-OUTS FOR MANUFACTURING PURPOSE ONLY.
SHAPE MAY VARY, BUT IS NOT FUNCTIONAL FOR THE APPLICATION.
- SHOWN IS A 10 POSITION CONNECTOR.

DETAIL A
SCALE 2:1REEL PACKAGING
DEREELING DIRECTION AND CONNECTOR POSITION
2500 CONNECTORS PER REEL FOR ALL PARTNUMBERS

2	FEMALE HOUSING	G.F.POLYESTER PBT	RED
1	FEMALE CONTACT	PHOSPHOR BRONZE	TIN OVER NICKEL
ITEM NO.	COMPONENT DESCRIPTION	MATERIAL	FINISH / COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH SEE TABLE
MATERIAL SEE TABLE	SEE TABLE

DWN M. GOSSELINK	-
CHK -	-
APVD -	-
PRODUCT SPEC 108-19052	-
APPLICATION SPEC -	-
WEIGHT -	-
CUSTOMER DRAWING	-

TE

TE Connectivity

CONNECTOR,
FEMALE-ON-BOARD TOP-ENTRY,
THRU-HOLE, Micro-MaTch

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-215079	-
SCALE 5:1	SHEET 1 OF 1	REV YI	