
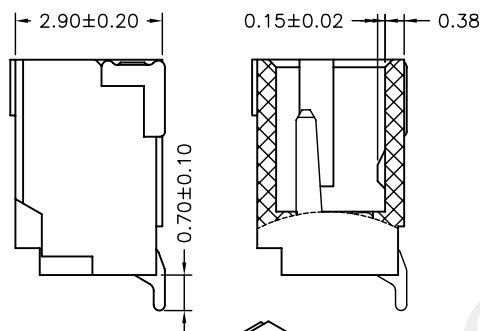


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze
 Solder Tabs: Brass
 Wafer: Nylon 6T&9T,UL94V-0
 Cap: Nylon 6T,UL94V-0
 Color: Black & Beige

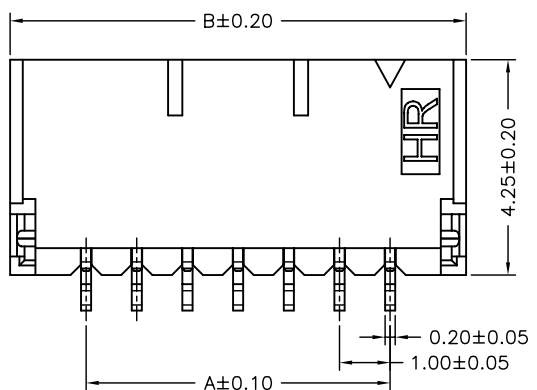


P/N LEGEND


A1001 WR-S-XP XXX
 ① ② ③ ④ ⑤

- ① Series No.
- ② Connector type: WR=Wright angel
- ③ Mounting type: S=SMT without post
- ④ No. of circuits
- ⑤ Option code:
 Blank=Nylon 6T,UL94V-0,Color Natural(Beige)
 Contacts/Matte Tin-plated
 Solder tabs/Matte Tin-plated
 D01 =Nylon 6T,UL94V-0,Color Natural(Beige)
 Contacts/Gold-flash and
 Solder tabs/Gold-flash
 D02 =Nylon 6T,UL94V-0,Color Natural(Beige)
 Contacts/Gold-flash 3u" and
 Solder tabs/Gold-flash
 D11 =Nylon 6T,UL94V-0,Color Natural(Black)
 Contacts/Gold-flash and
 Solder tabs/Gold-flash
 D12 =Nylon9T,UL94V-0,Color Natural(Beige)
 Contacts/Gold-flash and
 Solder tabs/Gold-flash

Circuit No.	Dimensions		
	A	B	C
02P	1.00	4.00	2.45
03P	2.00	5.00	3.45
04P	3.00	6.00	4.45
05P	4.00	7.00	5.45
06P	5.00	8.00	6.45
07P	6.00	9.00	7.45
08P	7.00	10.00	8.45
09P	8.00	11.00	9.45
10P	9.00	12.00	10.45
11P	10.00	13.00	11.45
12P	11.00	14.00	12.45
13P	12.00	15.00	13.45
14P	13.00	16.00	14.45
15P	14.00	17.00	15.45
16P	15.00	18.00	16.45
17P	16.00	19.00	17.45
18P	17.00	20.00	18.45
19P	18.00	21.00	19.45
20P	19.00	22.00	20.45
24P	23.00	26.00	23.45

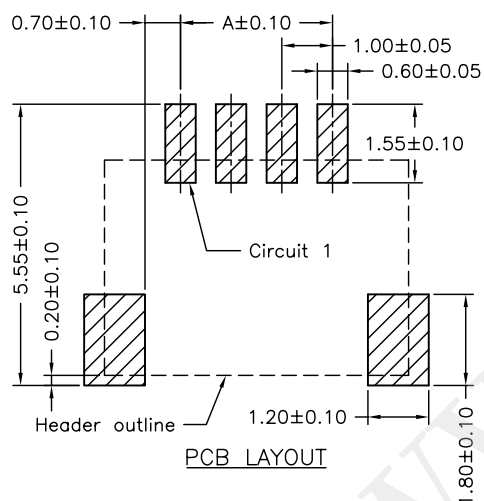

02~03P



					燦達電子工業股份有限公司		
					JOINT TECH ELECTRONIC IND. CO., LTD.		
					UNIT	SCALE	SHEET
					mm		1 of 2
				DRAWN BY	APPROVED BY		
				蕭惠鳳	董正一		
				2002.05.28	2002.05.28		
				GENERAL TOLERANCE			
C0	EN1312160435	2013.12.18	郭本思	X. X±0. 25	ANGLE±		
B5	EN1110110449	2011.11.29	陳敏	X. XX±0. 15			
REV.	DESCRIPTION	DATE	NAME	X. XXX±0. 05			
				DRAW NO. : A1001WR-S-XP			
				REV. CO			

TITLE:
 1.00mm PITCH
 90° WAFER-SMT TYPE