



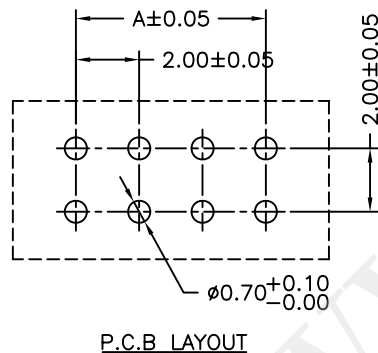

P/N LEGEND

A2004 WV-2XNP XXX

- ① Series No.
② Connector type: WV=Vertical
③ No. of circuits
④ Option code:
Blank= Nylon 66-V0, Gray(7528C), Tin-plated, Dim. F:3.00mm
WH=Nylon 66-V0, Natural(White), Tin-plated, Dim. F:3.00mm
BL=Nylon 66-V0, Blue(660C), Tin-plated, Dim. F:3.00mm
GR=Nylon 66-V0, Green(347C), Tin-plated, Dim. F:3.00mm
46=Nylon 46-V0, Natural(Beige), Tin-plated, Dim. F:3.00mm
46G=Nylon 46-V0, Natural(Beige), Gold-flash, Dim. F:3.00mm
101=Nylon 46-V0, Natural(Black), Gold-flash, Dim. F:3.00mm
102=Nylon 46-V0, Natural(Black), Gold-plated 8u", Dim. F:3.00mm
Y01=Nylon 66-V0, Natural(7528C), Tin-plated, Dim. F:2.50mm
Y11=Nylon 46-V0, Natural(Beige), Tin-plated, Dim. F:2.50mm
Y21=Nylon 46-V0, Natural(Beige), Gold-flash, Dim. F:2.50mm
Y02=Nylon 66-V0, Natural(7528C), Tin-plated, Dim. F:2.00mm
Y12=Nylon 46-V0, Natural(Beige), Tin-plated, Dim. F:2.00mm
Y23=Nylon 46-V0, Natural(Beige), Gold-flash, Dim. F:1.50mm

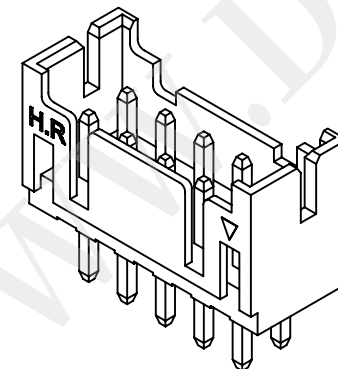

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass

Circuit No.	Dimensions				Circuit No.	Dimensions			
	A	B	C	D		A	B	C	D
2X02P	2.00	6.00	4.70	---	2X14P	26.00	30.00	28.70	24.00
2X03P	4.00	8.00	6.70	---	2X15P	28.00	32.00	30.70	26.00
2X04P	6.00	10.00	8.70	---	2X16P	30.00	34.00	32.70	28.00
2X05P	8.00	12.00	10.70	6.00	2X17P	32.00	36.00	34.70	30.00
2X06P	10.00	14.00	12.70	8.00	2X18P	34.00	38.00	36.70	32.00
2X07P	12.00	16.00	14.70	10.00	2X19P	36.00	40.00	38.70	34.00
2X08P	14.00	18.00	16.70	12.00	2X20P	38.00	42.00	40.70	36.00
2X09P	16.00	20.00	18.70	14.00	2X21P	40.00	44.00	42.70	38.00
2X10P	18.00	22.00	20.70	16.00	2X22P	42.00	46.00	44.70	40.00
2X11P	20.00	24.00	22.70	18.00	2X23P	44.00	48.00	46.70	42.00
2X12P	22.00	26.00	24.70	20.00	2X24P	46.00	50.00	48.70	44.00
2X13P	24.00	28.00	26.70	22.00					

[illegible]