

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.10kg min.

Durability : 60 Cycles

Electrical

Voltage Rating: 25V

Current Rating: 0.5A

Contact Resistance: 50mΩ max.

Dielectric Withstanding Voltage: 250V AC/1 min.

Insulation Resistance: 100MΩ

Physical

Housing: Thermoplastic, UL 94V-0 rated in Ivory Color

Contact: Copper alloy

Plating: See "ORDERING INFORMATION"

Metal Spring: Copper alloy

Operating Temperature: -55℃ to +85℃


DDRIII SO DIMM Socket

AS Series


5.2mm Height SMT Type

0.60mm Pitch

204 Pos.

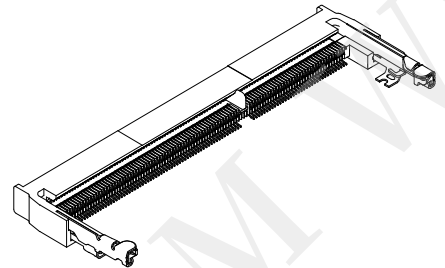

DRAWING

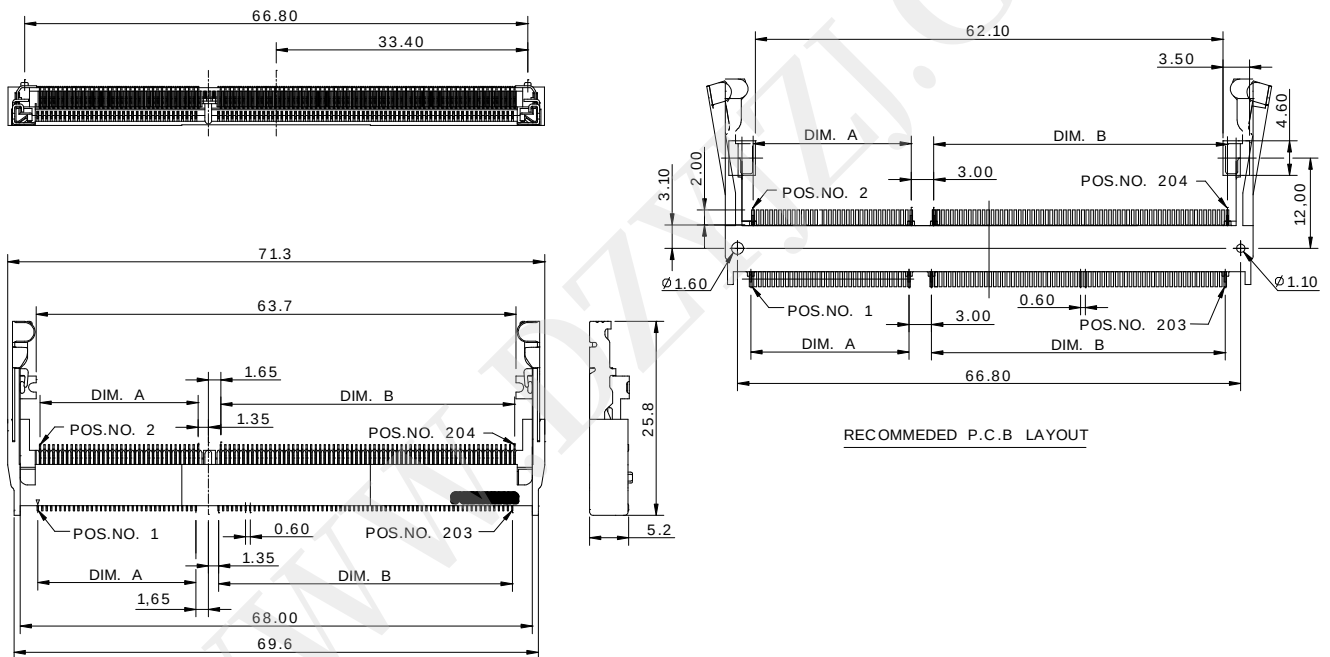

ORDERING INFORMATION

PRODUCT NO.: A S 0 A6 2 * - H 2 * 6 - * H

Memory Module Socket

Horizontal Type

Single Row

No. Of Pos.

A6=204 Pos.

SMT Type

Contact Area Plating

1=Gold Flash

Y=5u"Gold Plating

6=10u"Gold Plating

7=15u"Gold Plating

3=30u"Gold Plating

H=HALOGEN
/LEAD FREE

Package Code

4=Soft Tray

7=Tape Reel

6=Normal Type

S=Standard

R=Reverse

2=5.2mm Height

H=DDR SODIMM

AS0A62*- H2S6- *H	21.00	39.00
AS0A62*- H2R6- *H	39.00	21.00
P/ N	DIM.A	DIM.B