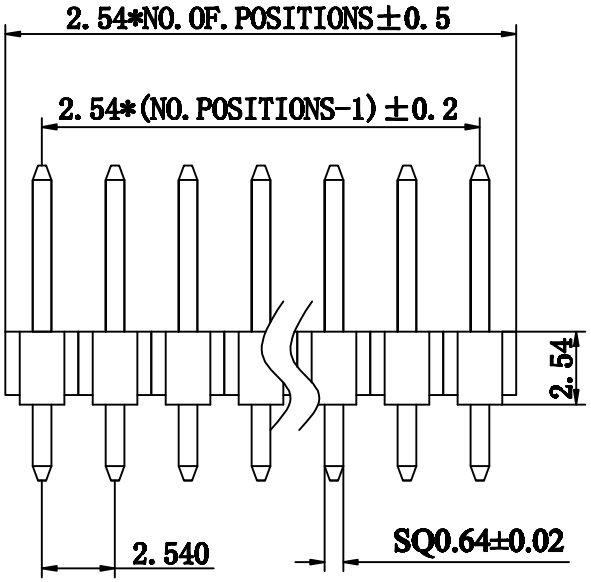



Specification
Insulator Material: Polyesetr,UL94V-0
Standard:P.B.T
Contact Material: Brass
Contact plated: 0.8u"Gold Over 50u" Nickel

Poles:2~40P
Current Rating : 3Amp
Contact Resistance:20 Milliohms Max
Insulation Resistace : 1000MΩ Min.
Dielectric withstanding Voltage:AC 500V
Operation Temperature : -40℃ -- +105℃

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO.,LTD
CHECKED:	DATE:	TITLE: 210S-1*XP (6.0/2.54/3.0)
DRAWN: LYF	DATE: 2010-08-12	CLIENT P/N /
		UNIT mm SCALE free
		FILE NO. Ckmtw-210-00001 REV. A

WWW.DZKJZJ.COM