

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/minute.




温度范围: -40° C to +105° C

Temperture Range: -40° C to +105° C

Ordering Information

B190-1 XX XX X S X X X

NO. OF PINS	Contact Plating	INSULATOR	BACK	PACKING
6-64P	Full of Gold	Series-gold	MATERIAL:	
	A0=0.8u"	B0=0.8u"	A: PBT	A: PE Bag
	A1=1u"	B1=1u"	B: PA6T	B: Tape & Reel
	A2=1.5u"	B2=1.5u"	C: PA9T	C: Tube
	A3=2u"	B3=2u"	D: LCP	D: Tube+CAP
	A4=3u"	B4=3u"		E: Tray
	A5=5u"	B5=5u"		
	A6=10u"	B6=10u"		
	A7=15u"	B7=15u"		
	A8=20u"	B8=20u"		
	A9=30u"	B9=30u"		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

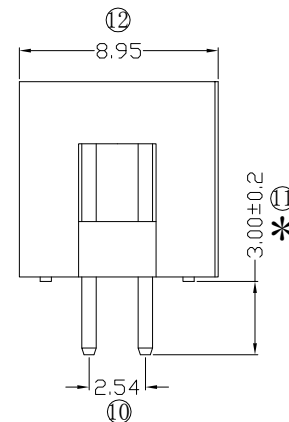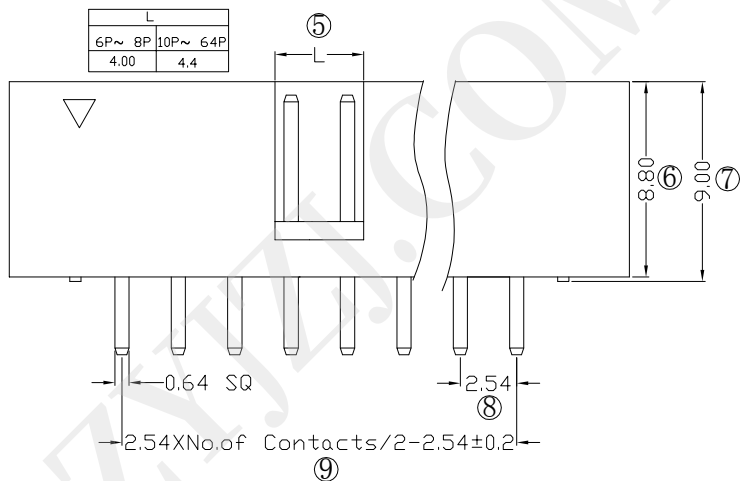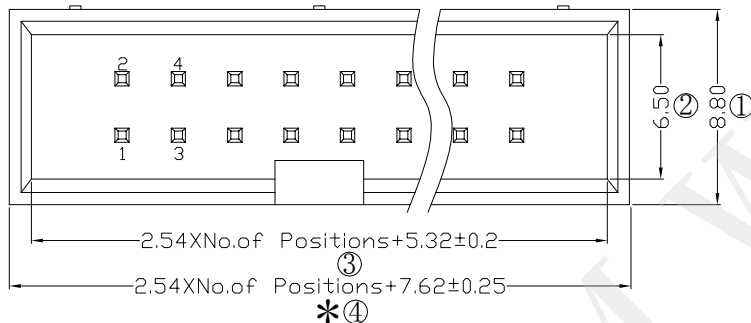

RoHS
COMPLIANT

注意
事项

1. 带*为品质重点检验尺寸

				OPERATION		SCALE		Fit		 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.							
				X.X	±0.25	UNIT		MM									
				X.XX	±0.20	SIZE		A4		DESIGN		刘伟 2021.06.15		PART NO		B190-1XXXXXX	
				X.XXX	±0.10												
A0	2021.06.15	/	新版发行	Angle	±3°	SHEET		1/1		CHECK				TITLE		2.54筒牛 塑高9.0 XXP 180度 DIP:3.0	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.				APPROVE				Customer No.			

Yxcon 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co., Ltd.