

RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

SPECIFICATIONS

- Current rating: 2A
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:




Insulator Material:PA6T (UL 94V-0) Black
Contact Material:Copper Alloy
Plating:Matte Tin or gold plated over Nickel
Mate with PM200 /I200 series

Ordering Code:


BH200R-xxP
1 2

1.序列号

2.Pin位数: 2x06=12P

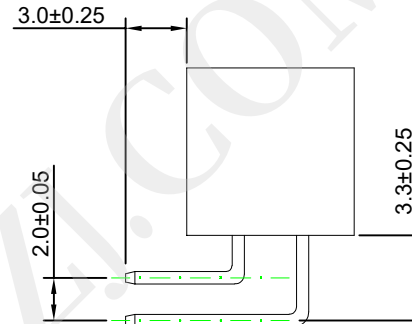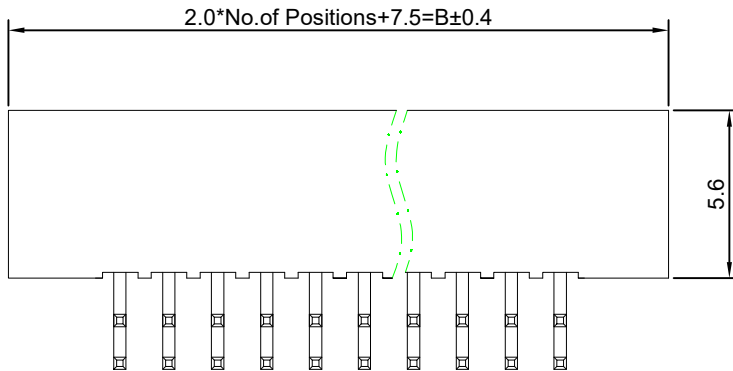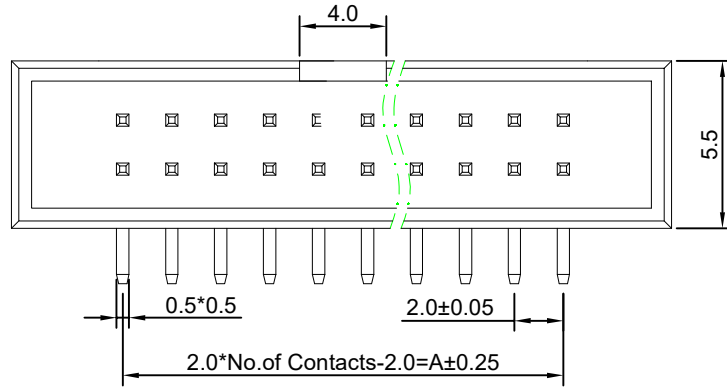

No.of PIN/ROW	Dimension	
	A	B
2x03	4.00	13.50
2x04	6.00	15.50
2x05	8.00	17.50
2x06	10.00	19.50
2x08	14.00	23.50
2x10	18.00	27.50
2x12	22.00	31.50
2x14	26.00	35.50
2x16	30.00	39.50
2x18	34.00	43.50
2x20	38.00	47.50
2x24	46.00	55.50
2x26	50.00	59.50
2x30	58.00	67.50
2x34	66.00	75.50

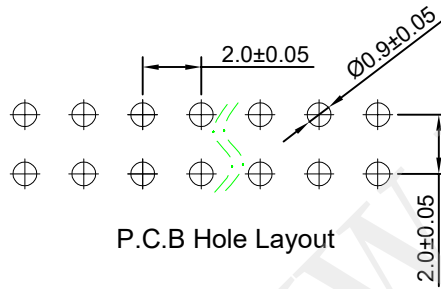

P.C.B Hole Layout

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF XFCN AND SHALL
NOT BE REPRODUCED, COPIED OR CUED IN
ANY MANNER WITHOUT THE PRIOR
WRITTEN CONSENT OF XFCN

PART NO: BH200R-xxP		XFCN 兴飞连接器		
TITLE: 2.00mm 简易牛角 双排 DIP 90°		0769-82001899		
		www.xfconn.com		
		DWG NO: /		
APPD	Chen ZhiQiang			
CHKD	Liu Wei	VIEW		
DRAW	Chen HongJiang	SCALE	SHEET	REV
DATE	2024.08.21	NONE	1/1	A1