

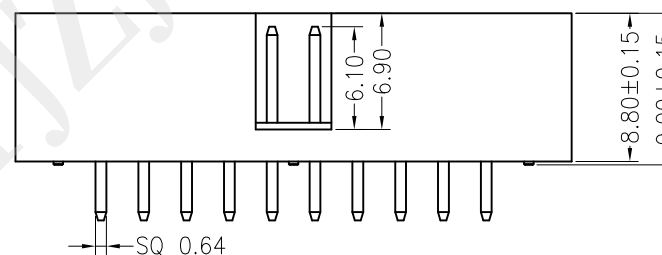
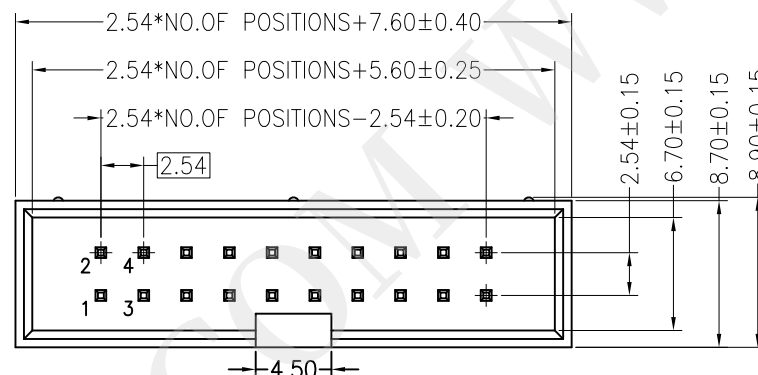


环保物料

TEL:0769-82001899

NOTES:
Voltage Rating:250V AC/DC
Current Rating:3.0A AC/DC
Dielectric Withstand Voltage:500V AC/minute
Contact Voltage:20M Ω Max.
Insulation Voltage:1000M Ω Min
Operation temperature:-40 °C to +105 °C
Insulator Material:Polyester.UL94V-0
Contact Material:Brass
Contact Plating:AuorSn Plated on Nickel Overall

Recommended P.C.B Layout
P.C.B Board Tolerance ± 0.05

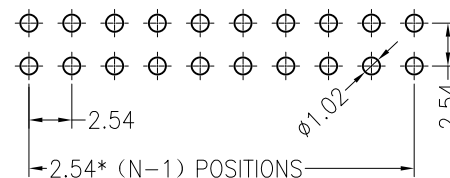

Dimension antitheses list		
item	PC	L
Standard	3.30	11.50
Alternate	---	---

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X.	±0.30 X° ±5°	CHKD				DATE	2010. 4. 12
				.X	±0.20 .X° ±2°	APPD		PRODUCT NAME	2.54mm Box Header Connectors	UNITS	mm
				.XX	±0.08 .XX° ±1°					SCALE	1:1
A0				.XXX	±0.03 .XXX° ±0.5°	VIEW		PART. NO.	BH254V-XX-XXB88XX	DWG NO.	009
VER	MODIFICATION		DRAW	DATE							