


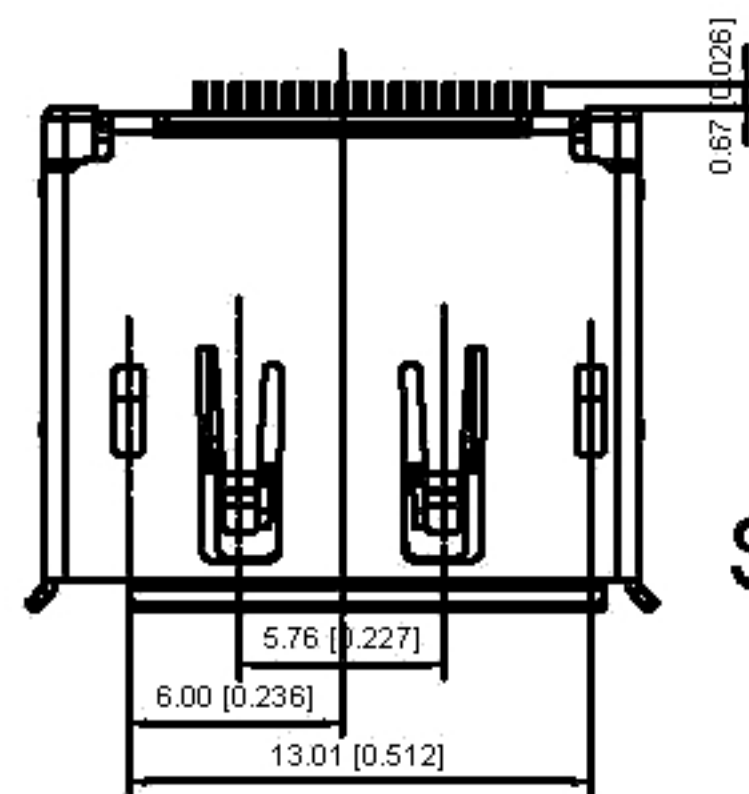
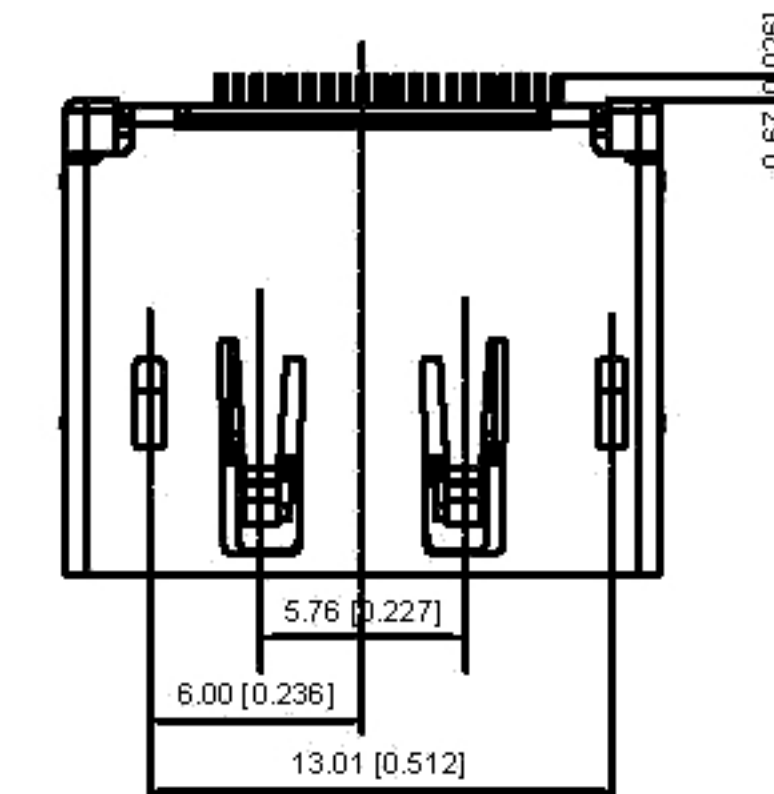
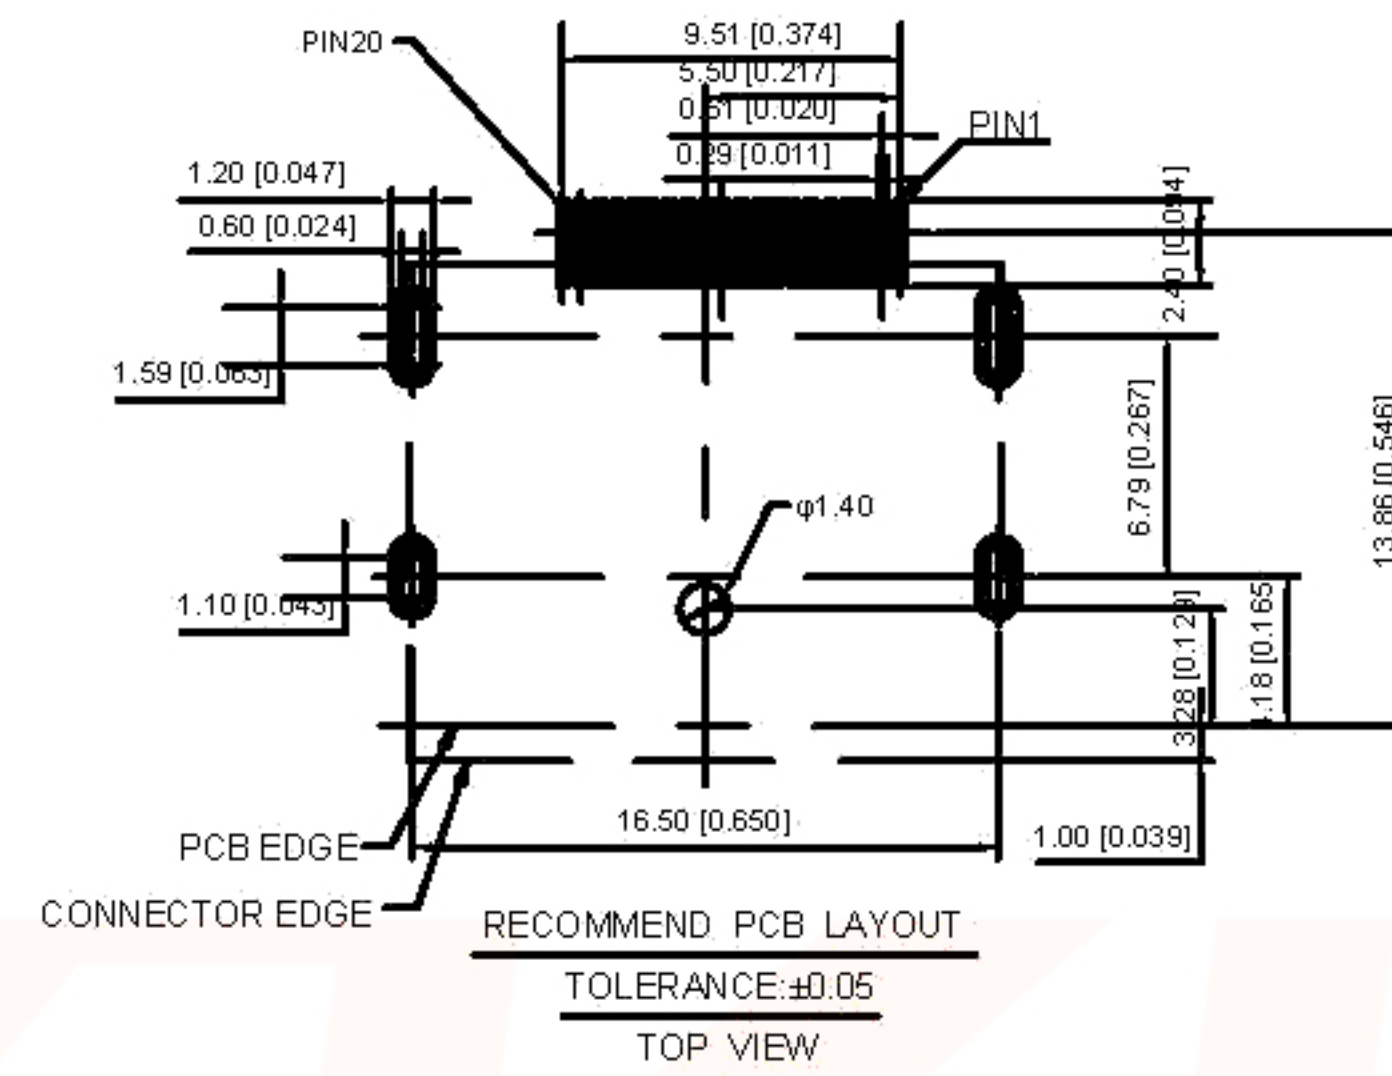


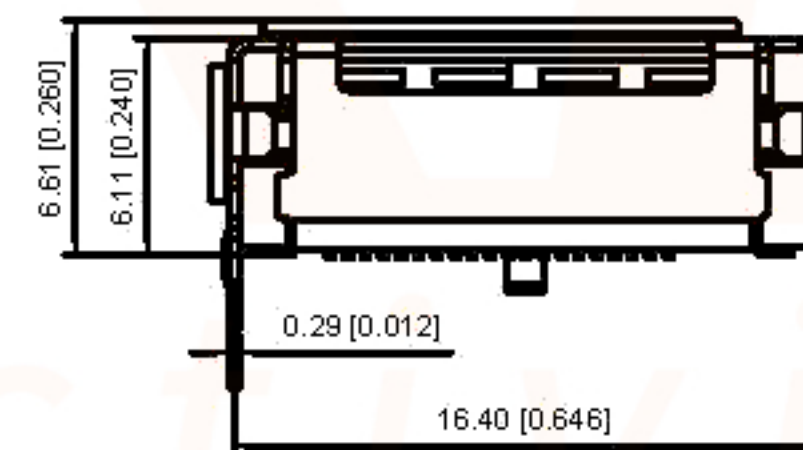

S: Scrolls

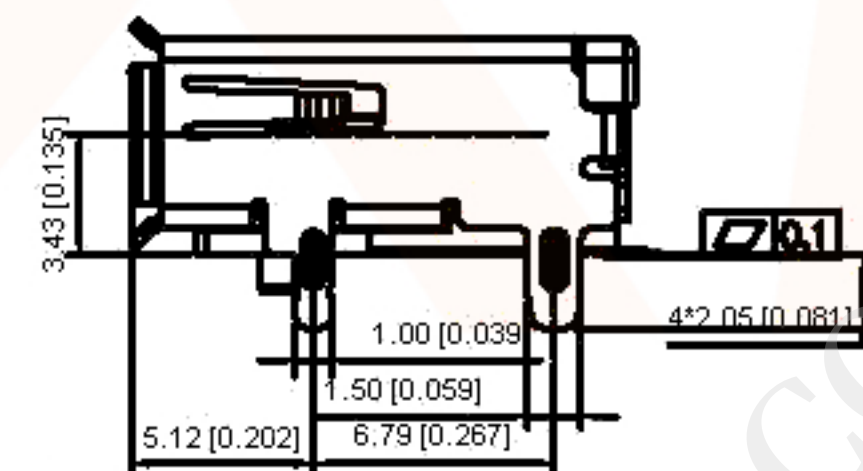

F: Flat

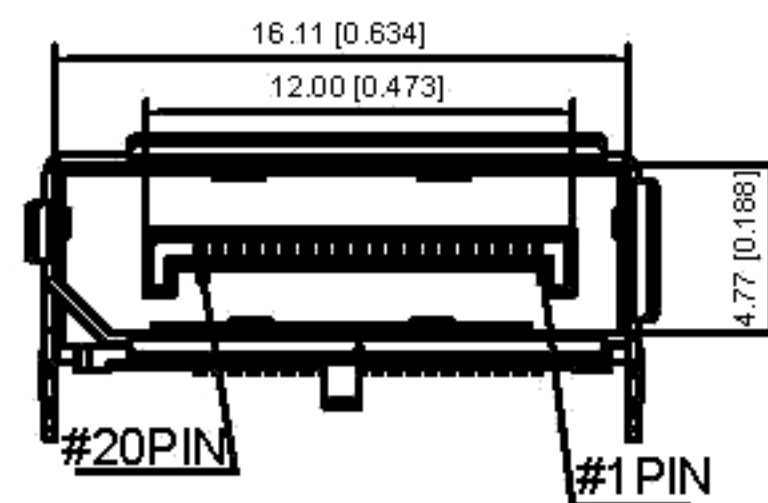

CAR06 - 201ENX X
① ②


- ① PACKAGE
2=TAPE REEL
5=TAPE REEL+MYLAR
② Interface type
S:Scrolls
F:Flat

MATERIALS

1. HOUSING: LCP (UL94V-0), BLACK.
2. TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAILS, NICKEL PLATED OVERALL.
3. SHELL: STAINLESS STEEL, NICKEL PLATED OVERALL.

SPECIFICATION

1. CURRENT RATING: 0.5A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE: 100MΩ MIN. AT 500V DC.
4. CONTACT RESISTANCE: 30mΩ MAX.
5. OPERATING TEMPERATURE: -25°C TO +85°C.
6. DURABILITY: 10000 CYCLES.
7. MATING FORCE: 4.5kgf MAX.
8. UNMATING FORCE: 1.0kgf MIN.

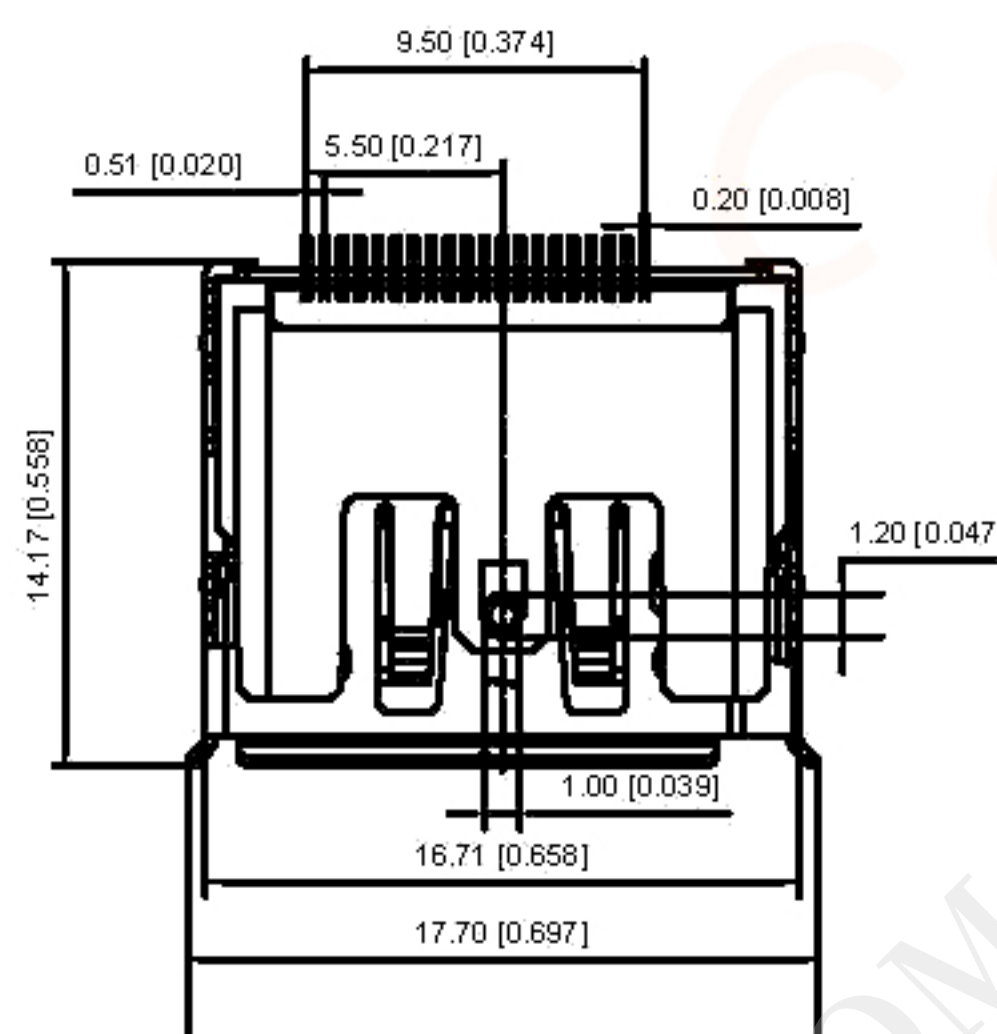

							DSND		DATE		SCALE: N/A	MODEL TYPE: DP CONNECTOR			
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:			
ΔX					L≤ 4	±0.2	CHKD		DATE		UNIT: mm/in	DWG NO.: CAR02-201ENXX			
ΔX					4<L≤ 16	±0.3	APPD		DATE		SIZE: A4				
ΔX					16<L≤ 63	±0.4	XKB INDUSTRIAL PRECISION CO.,LIMITED						WEIGHT	SHEET	REVISION
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5							UNSPECIFIED TOLERANCES		
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn															