

CDM/CDH SERIES

DIP

TACT

LED TACT

PUSH BUTTON

TOGGLE


SLIDE

ROCKER

MICRO / POWER





HOW TO ORDER

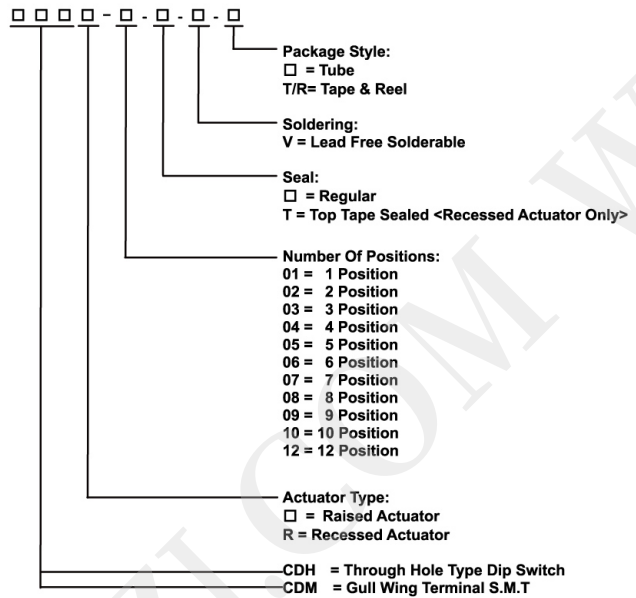

SPECIFICATIONS

Mechanical life: 2000 operations per switch
 Operation Force: 1000gf max.
 Stroke : 1.0mm
 Operation Temp: -20°C to 70°C
 Electrical life: 2000 operations per switch-24 VDC, 25mA
 Contact Resistance: 100m max. at initial
 Non-Switching Rating: 100mA, 50VDC
 Switching Rating: 25mA, 24VDC
 Circuit: Single pole single throw

CDM SERIES SLIDE TYPE

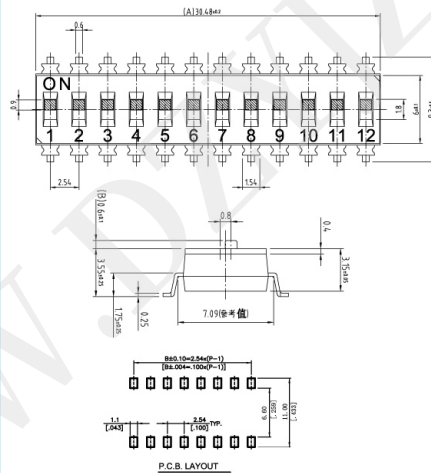


MODEL NO.	NO. POS	A
CDM-02	2	2.54
CDM-03	3	5.08
CDM-04	4	7.62
CDM-05	5	10.16
CDM-06	6	12.70
CDM-07	7	15.24
CDM-08	8	17.78
CDM-09	9	20.32
CDM-10	10	22.86
CDM-12	12	25.40



Schematic(TYP.)

(2,3,4,5,6,7,8,9,10,12, POS AVAIL)

CONTACT SYSTEM



CDH SERIES SLIDE TYPE

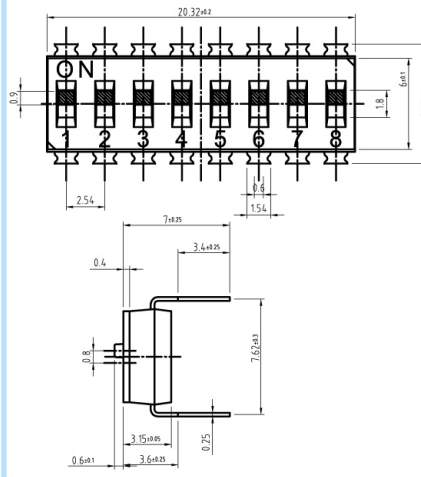

MODEL NO.	NO. POS	A
CDH-02	2	2.54
CDH-03	3	5.08
CDH-04	4	7.62
CDH-05	5	10.16
CDH-06	6	12.70
CDH-07	7	15.24
CDH-08	8	17.78
CDH-09	9	20.32
CDH-10	10	22.86
CDH-12	12	25.40

Schematic(TYP.)

(2,3,4,5,6,7,8,9,10,12, POS AVAIL)

CONTACT SYSTEM

