
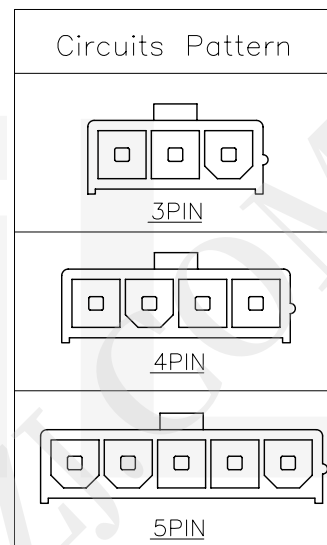
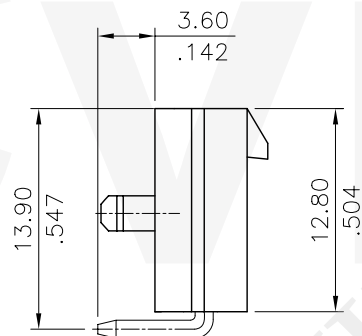
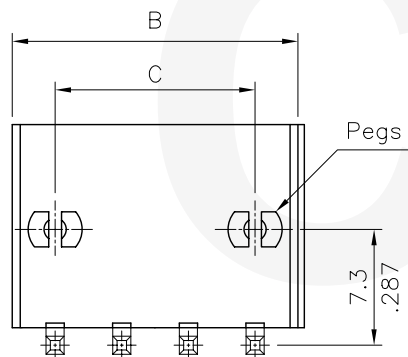


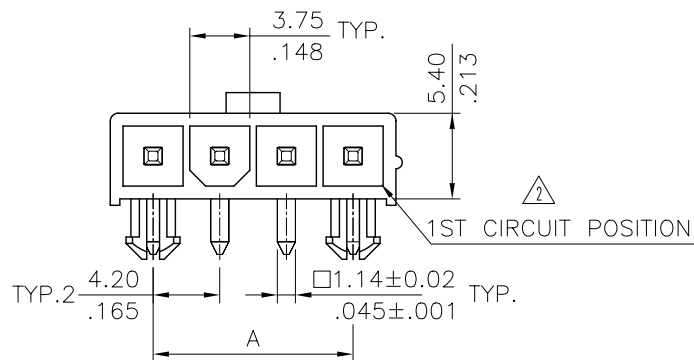


Circuits	Dimension		
	A	B	C
3	8.4(.331)	13.8(.543)	8.4(.331)
4	12.6(.496)	18.0(.709)	12.6(.496)
5	16.8(.661)	22.2(.874)	16.8(.661)

Ordering Code:

CP-01 4 ** 1 * S
① ② ③ ④ ⑤ ⑥

- ① Series No.
 ② Type of Connector:
 4= Right angle PCB mount header
 ③ No of Circuits:
 ④ Plating Code: 1= Tin over Nickel
 2= Gold flash plated over Nickel
 3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
 △ ⑤ Variation: 4= UL 94V-2, With mounting pegs
 5= UL 94V-0, With mounting pegs
 ⑥ S= Single Row Header

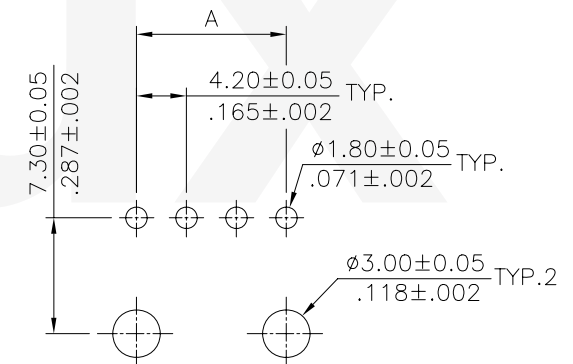

Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

△4					DATE	UNIT: mm / inch	TITLE: RIGHT ANGLE HEADER CP-01 POWER CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
△3				DRAWN BY: Sandy	9/19-08'	TOLERANCE UNLESS OTHERWISE SPECIFIED	CP-01 POWER CONNECTOR				
△2	Sandy	9/19-08'	ECN08463	ENGINEER: Eisley	9/19-08'	.X ± 0.38/.015 X' ± r	MATERIAL:	DRAWING NO. CP0158AC	PART NO.	CP-014**14S CP-014**15S	
△1	Hank	10/4 07'	ECN07412	CHECKED BY: Alex	9/19-08'	.XX ± 0.25/.010 X' ±	FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	9/19-08'	.XXX ± 0.10/.004 X' ±		SCALE	3 / 1	SHEET	1 OF 1