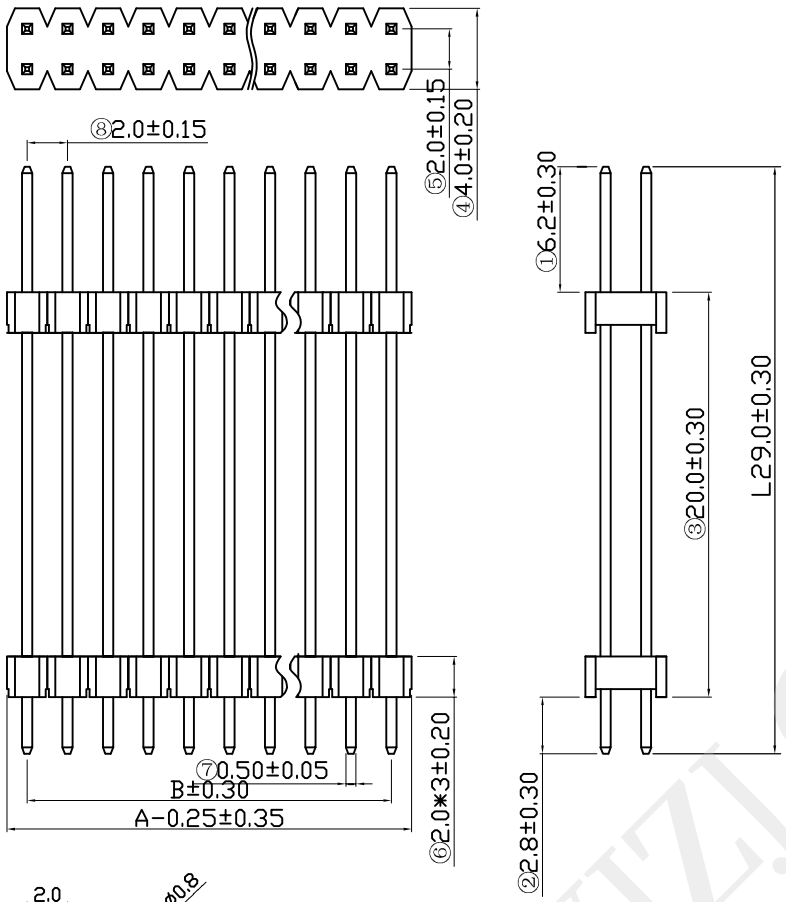

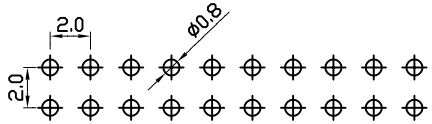

Recommended PCB Layout

NOTE:

MATERIAL

HOUSING:PBT UL94V-0

CONTACT: Brass (C2700/H65).

CONTACT PLATING:GOLD over Nickle

ELECTRICAL

CURRENT RATING: 1AMP.

VOLTAGE RATING: 250V AC/DC

DIELECTRIC WITHSTANDING VOLTAGE:500V AC/minute.

CONTACT RESISTANCE: 20mΩMAX.

INSULATION RESISTANCE:1000MΩ MIN.

ENVIRONMENTAL

TEMPERATURE RANGE: -40° CTO+105° C.

DIMENSION TABLE 注：2*40P A尺寸不用减去0.25mm

Circuits	Dimension A	Dimension B	Circuits	Dimension A	Dimension B	Circuits	Dimension A	Dimension B
2 * 2	4.00	2.00	2 *15	30.00	28.00	2 *28	56.00	54.00
2 * 3	6.00	4.00	2 *16	32.00	30.00	2 *29	58.00	56.00
2 * 4	8.00	6.00	2 *17	34.00	32.00	2 *30	60.00	58.00
2 * 5	10.00	8.00	2 *18	36.00	34.00	2 *31	62.00	60.00
2 * 6	12.00	10.00	2 *19	38.00	36.00	2 *32	64.00	62.00
2 * 7	14.00	12.00	2 *20	40.00	38.00	2 *33	66.00	64.00
2 * 8	16.00	14.00	2 *21	42.00	40.00	2 *34	68.00	66.00
2 * 9	18.00	16.00	2 *22	44.00	42.00	2 *35	70.00	68.00
2 *10	20.00	18.00	2 *23	46.00	44.00	2 *36	72.00	70.00
2 *11	22.00	20.00	2 *24	48.00	46.00	2 *37	74.00	72.00
2 *12	24.00	22.00	2 *25	50.00	48.00	2 *38	76.00	74.00
2 *13	26.00	24.00	2 *26	52.00	50.00	2 *39	78.00	76.00
2 *14	28.00	26.00	2 *27	54.00	52.00	2 *40	80.00	78.00

ROHS2.0

本圖紙知識產權及版權由深圳市永丰盈电子有限公司所有,未經書面許可不准擅自傳閱、复制和修改.本公司保留法律追究的权利。

类 别	针座	品 名	CS-1126WS-2*4B(L29)			材 料		单 位	mm	SHEET 1 OF 1		
版 本	A/0	设 计	李文畅	X.X	±0.40	颜 色		比 例	1:1	⚠	修改内容	修改日期
制定部门	工程部	绘 制	李文畅	X.XX	±0.30	画 法		数 量		1		
工程图号	CST-1126WS	审 核	姚培柱	X.XXX	±0.20	CST 深圳市永丰盈电子有限公司 ShenZhenYongFengYing ELEECTRONICS CO.,LTD.				2		
制定日期	2018/06/09	核 准	周中湖	X.XXXX	±0.10					3		

WWW.DZYJZJ.COM