

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3

4

5




6

7

8

9

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2009.07.20	車 激
02	△	依上級要求變更圖號	2012.05.21	李芳忠

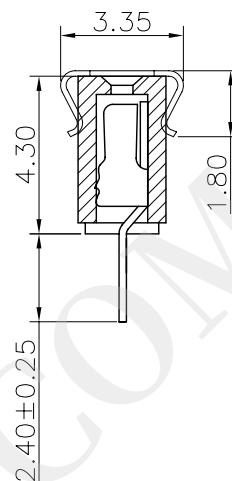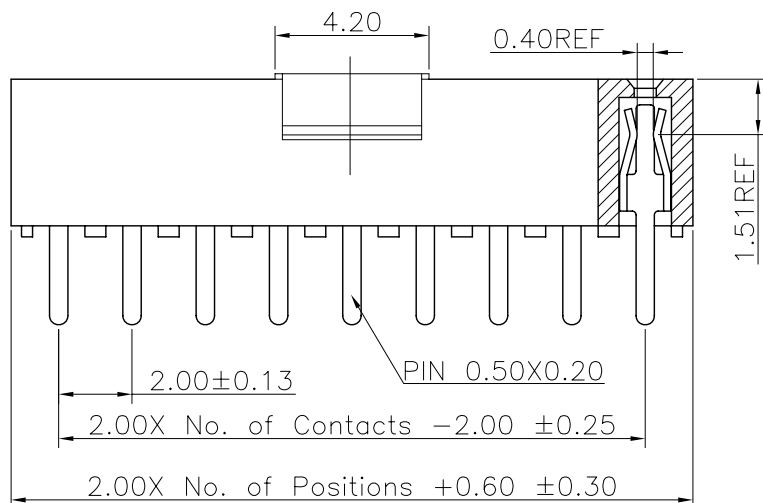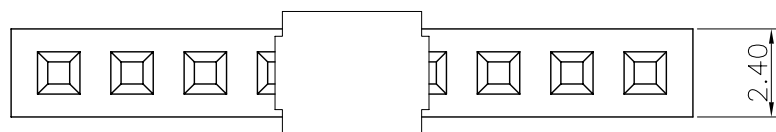

Specifications
Current Rating:2Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature
Thermoplastic, UL 94V−0 Nylon 6T(無鹵)or
the equivalent material
All materials must meet Greenconn
requirement for environment protection.

Ordering Information

C SFA101 - XX XX A 001 R 1 A X


No. of Pins per Row
02~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin

Color
1=Black

Standard Packing
A=Box
Selective Packing
C=Tube
E=Cap+Tube
F=Cap+Tape&Reel

Recommended P.C.Board
Layout
(Tolerance:±0.05)



格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGN: 李芳忠

DATE: 2012.05.21

CHECKED: 劉北平

DATE: 2012.05.21

AUDITED: 李輝

DATE: 2012.05.21

APPROVED: cc_li

DATE: 2012.05.21

DWG. NO.

△

CSFA101-CA1RA

PART NO.

CSFA101-XXXX A001R1AX

TITLE.

2.00 FEMALE HEADER
SINGLE ROW DIP TYPE
CONNECTOR

1

2

3

4

5

6

7

8

9