


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2010.06.08	謝金發
02	△	依上級要求變更圖號	2012.04.25	李芳忠
03	△△	依業務要求增加82電鍍碼	2019.10.17	馮國東

The cap used above 4pins

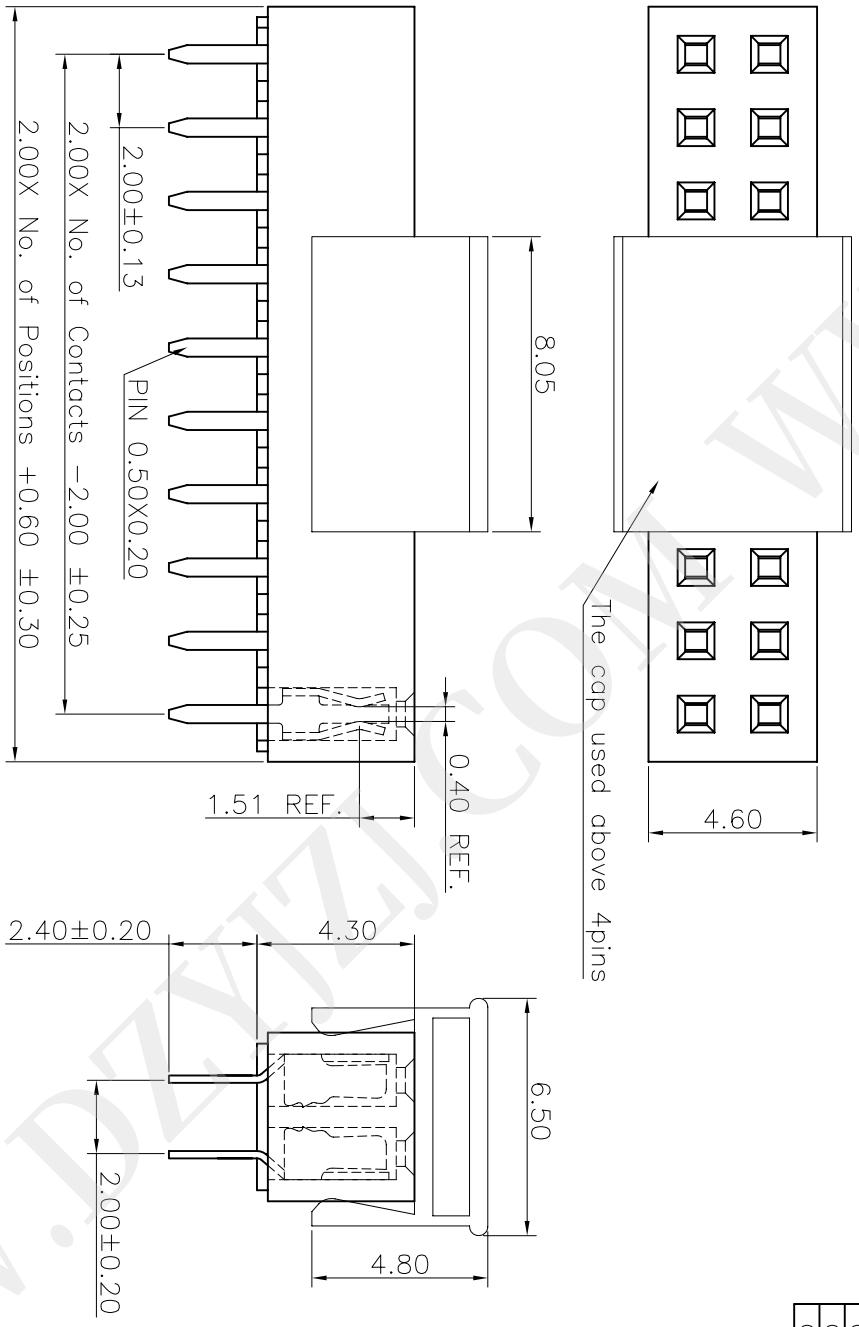

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩmin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free) or the equivalent material
All materials must meet Greenncon hazardous substances control standards.


Ordering Information

C SFA201 - XX XX A 001 R 1 A X

No. of Pins per Row
02~40
Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin
△82=1u" gold over 100~150u" Nickel

Color
1=Black
Standard Packing
A=Box
Selective Packing
C=Tube
E=Cap+Tube
F=Cap+Tape&Reel

Recommended P.C.Board
Layout
(Tolerance:±0.05)

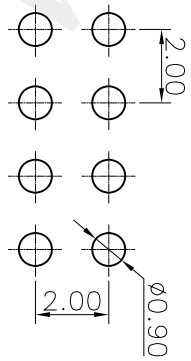

格稜股份有限公司
Greenncon Corporation

REV.	UNIT.	SCALE.	PAGE.	
03	mm	5:1	1/1	

GENERAL TOLERANCE		DESIGNED: 馮國東	DATE: 2019.10.17	DWG. NO.	TITLE.
X.±5.0°	X.±0.30	CHECKED: 邱國延(代)	DATE: 2019.10.17	CSFA201-CA1RA	2.00 FEMALE HEADER DUAL ROWS DIP TYPE CONNECTOR
X.±3.0°	X.±0.25	CO SIGNED: 鍾隆進	DATE: 2019.10.17		
.XX*±2.0°	.XX±0.15	APPROVED: 邱國延	DATE: 2019.10.17		
.XXX*±1.0°	.XXX±0.10			PART NO.	
				CSFA201-XXXX A001R1AX	