


PCB LAYOUT

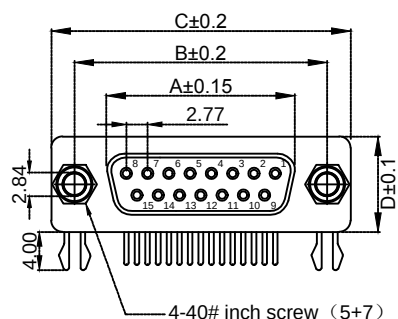

Material
Insulator:Glass filled PBT,(UL 94V-0)
Contact : Brass

Electrical Characteristics
Current rating:2AMP
Dielectric Withstanding Voltage:AC 500V for 1 Minute.
Insulator Resistance:1000MΩ Min.AT DC 500V.
Contact Resistance:20mΩ Max.
Operating Temperature:-45℃~+105℃

PIN 尺寸	A±0.15	B±0.2	C±0.2	D±0.1
DR-9F	16.50	25.00	30.80	12.50
DR-15F	24.80	33.30	39.20	12.50
DR-25F	38.55	47.10	53.10	12.50
DR-37F	54.90	63.50	69.44	12.50

			D-SUB-DR*F		上海洲日电子有限公司 Shanghai Zhouri Electronics CO.,LTD			
X.	±0.3	±5°			上海康司玛电子设备进出口有限公司 Shanghai KangSiMa Eletronic Equipment			
X.X	±0.2	±3°			import and export Co.,LTD			
X.XX	±0.15				TEL:86-21-34975176/51571121			
201171018			201171018		物料编号		1:1	
201171018			201171018				mm 图幅	
201171018			201171018				A4	