Dec.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Mating figure

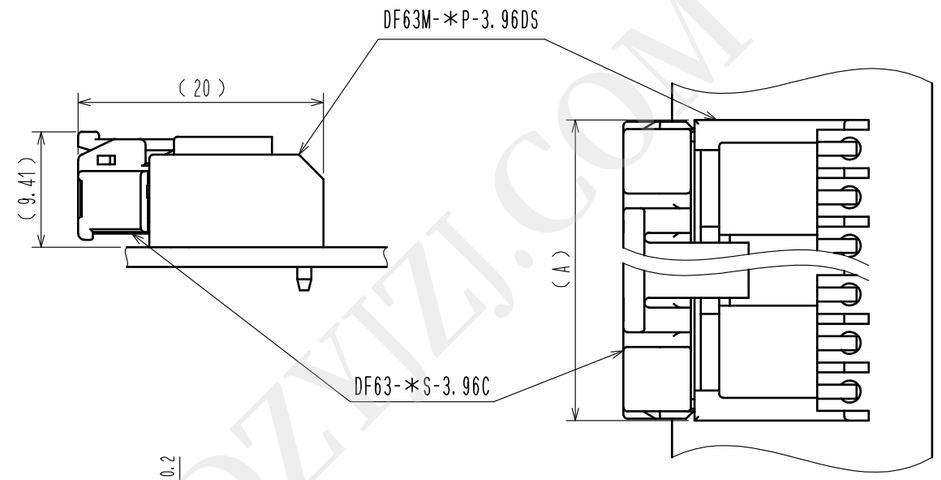

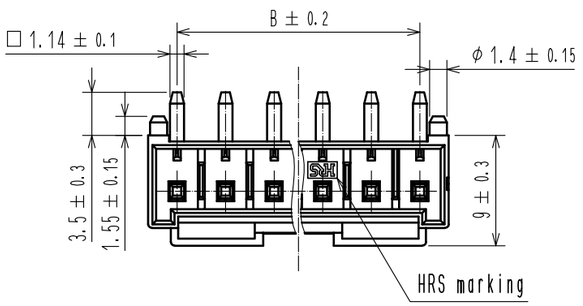

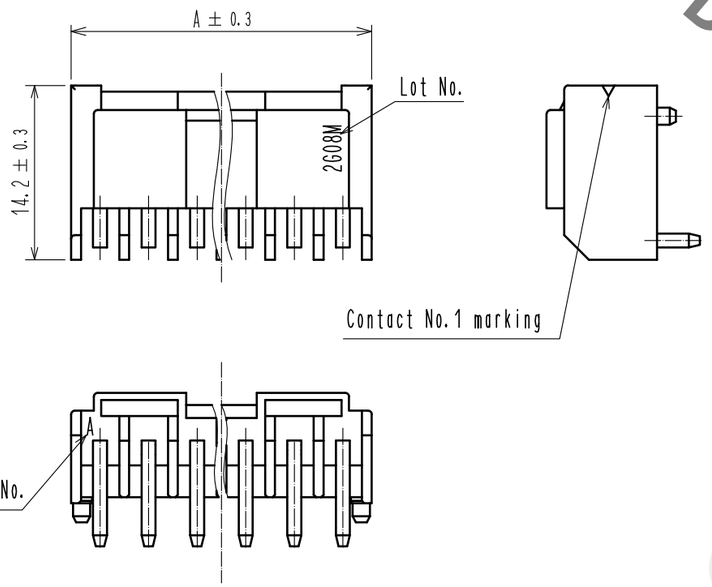

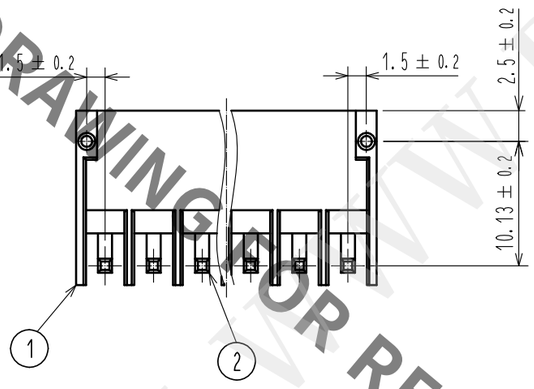

Recommended pattern(FREE)
(Recommended board thickness t=1.6mm)

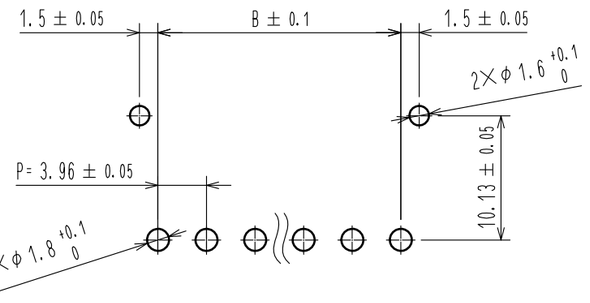

Part Number	HRS No.	Number of Contact(*)	A	B
DF63M-1P-3.96DS	680-0570-0	1	6.2	—
DF63M-2P-3.96DS	680-0571-0	2	8.66	3.96
DF63M-3P-3.96DS	680-0572-0	3	12.62	7.92

△1

Note 1. Per pack : 100 pieces.
2. The dimension in parenthesis are for reference.
3. UL(FIle No.E52653)
C-UL(Fie No.E52653)
TUV(Certificate No.R50318850) authorization article.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
1	PBT	UL94V-0(BLACK)	2	Brass	Tin plating 1μm MIN

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△1	1	DIS-H-00004240	TS. KUMAZAWA	SZ. ONO	20180925

HIROSE ELECTRIC CO., LTD.

APPROVED	HS. OKAWA	20170915	DRAWING NO. EDC-378594-00-00
CHECKED	TS. FUKUSHIMA	20170915	PART NO. DF63M-*P-3.96DS
DESIGNED	HT. SATO	20170915	CODE NO. CL680- △1 1/1
DRAWN	MI. SAKIMURA	20170915	

FORM HC0011-5-7

HRS DRAWING FOR REFERENCE
WWW.DZYJZJ.COM