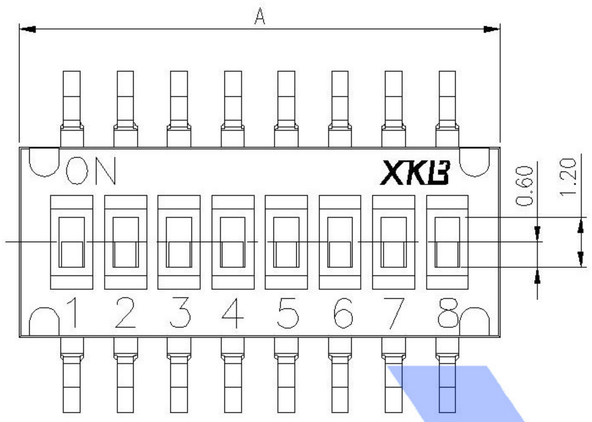

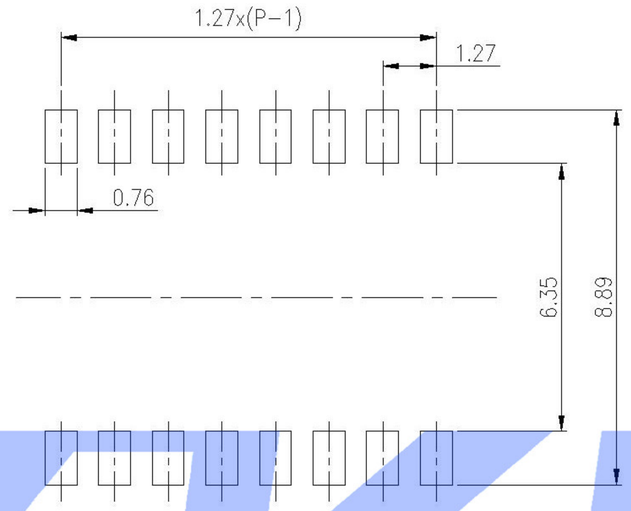

P.C.B. LAYOUT

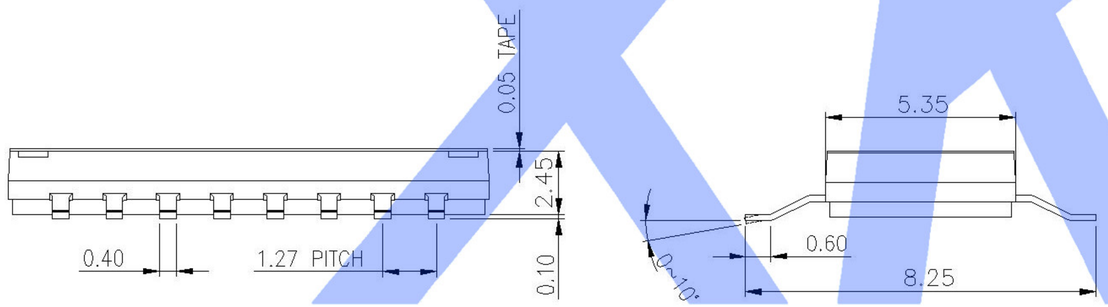

Short (S)

SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	50mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	500V AC/1 minute
Operating Force	1,000gf max.
Travel	1mm
Operating Life	2, 000 cycles
Operating Temp.	-20°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

CIRCUIT

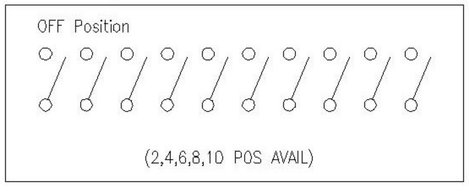

PART NO.	NO.OF POS	DIM A	Short (S)
DSHP02TS	2	4.19	DSHP02TS-S
DSHP04TS	4	6.72	DSHP04TS-S
DSHP06TS	6	9.25	DSHP06TS-S
DSHP08TS	8	11.78	DSHP08TS-S
DSHP10TS	10	14.31	DSHP10TS-S

XKB SWITCH CONNECTOR

MARK	DESCRIPTION	DATE	REVISED	APPROVED
△X				
△X				
△X				

REVISIONS

ANGLAR	±5°
L≤4	±0.2
4<L≤16	±0.3
16<L≤63	±0.4
L>63	±0.5

UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A
DWN		DATE		VIEW:
CHKD		DATE		UNIT: mm
APPD		DATE		SIZE: A4

MODEL TYPE: DIP SWITCH

PART NO.:

DWG NO.: DSHPXXTS-S

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0