

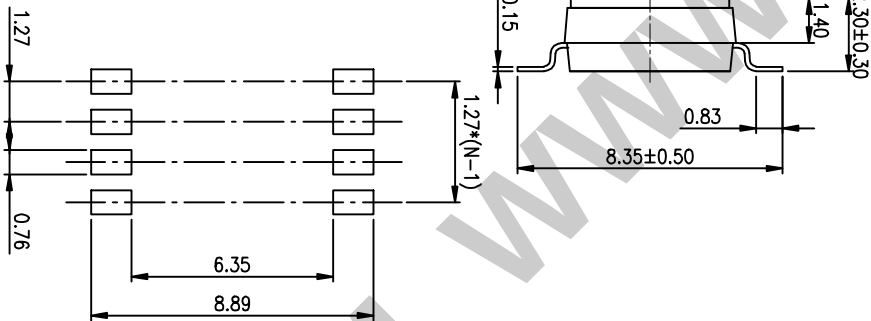


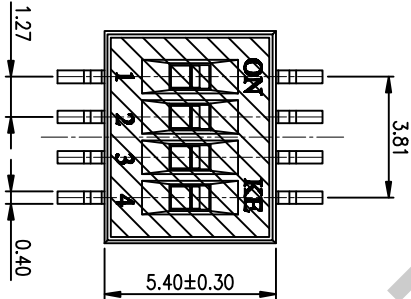


PRODUCT NO.	RoHS compliant
DSHP04TSGE1	



RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



NOTES :1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Electrical life:1000cycles 25mA 24VDC
- 5>.Mechanical Life:3000cycles Operations

2. PLATING:

GOLD FLASH 1u”(min.) SOLDER TAIL,
3u” GOLD PLATING ON THE CONTACT AREA,
WITH 50u” NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION :

DSHP XX I S G E I

- 〔包装方式: T=管装 R=Reel〕
- 〔电镀层: B=镀锡3u”焊脚部, 2u” G=镀金3u”焊脚部, 3u” F=镀金10u”焊脚部, 10u”〕
- 〔G=镀金 S=内镀金(接触部) 外镀锡(焊脚部)〕
- 〔脚型: S脚 / J脚 / I脚 / A脚 / Z脚〕
- 〔T=低推贴胶 S=低推不贴胶 L=长推〕
- 〔产品代码: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P〕

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	3u” Gold
④	Terminal	Brass	1u” Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u” Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED				INSPECTION	
LINER		ANGLES		COPY	
0 ± 0.25		0. ± 2°		PROJECTION	
.00 ± 0.15		.0 ± 1°		DRAWING	
.000 ± 0.10		.00 ± 0.5°		CHECK	
DESIGN		kathy		APPRO.	
PRAT NO.		03/20/12		FILE NO.	
PRODUCT FAMILY DSHP SERIES		DSHP04TSGE1		SIZE	
BY DSHP SERIES PITCH 1.27mm		UNIT		SCALE	
DRAWING		SHEET		REV.	
A4		mm		2 : 1	
				10F-1	
				A	

东莞市广智实业有限公司
Dongguan Kingtek Industrial Co., Ltd.