
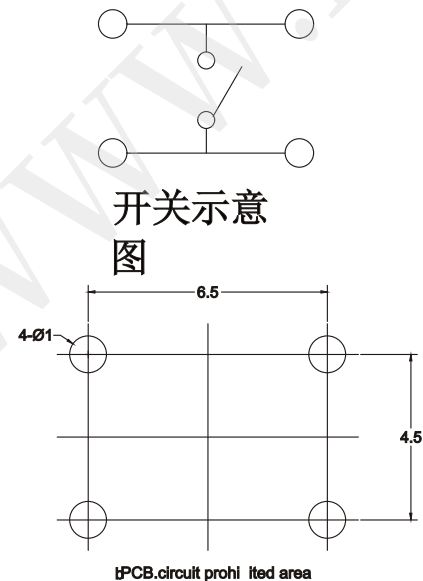
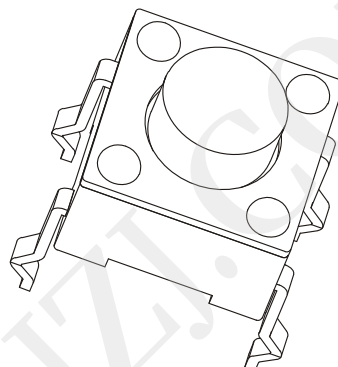
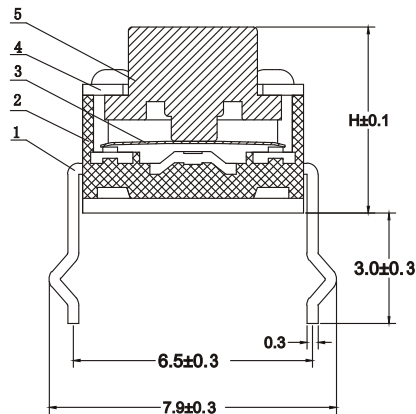
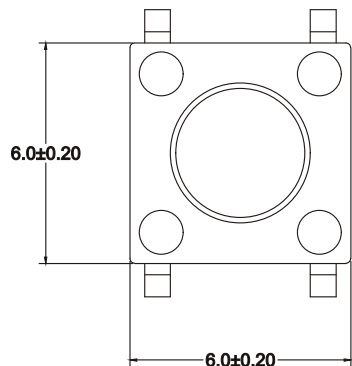


ABIDE BY ROHS

ITEM	H±0.1
01	4.3
02	4.5
03	4.8
04	5.0
05	8.0
06	9.0
07	9.5
08	10.0
09	11.0
10	12.0
11	13.0
12	14.0
13	15.0
14	16.0
19	...
20	22.0
21	29.0

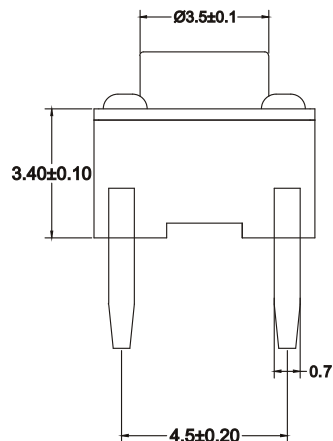

Remarks:

- 1.Rated current、Voltage: DC 12V 50mA
- 2.Contact resistance: $\leq 30\text{m}\Omega$
- 3.Insulation resistance: $\geq 100\text{M}\Omega$
- 4.The intensity of operations: $260 \pm 50\text{gf}$
- 5.Life requirements: 100000次
- 6.Withstand voltage: AC 250V 1分钟
- 7.All materials comply with RoHS standards

5	Button	PPA (21H以后是聚碳材料)	1	Black
4	Cover	Q195	1	Cu-Sn Plated
3	Shrapnel	SUS301	1	Silver coating
2	Housing	PPA	1	Black
1	Terminal	Brass	4	Ag Plated
NO.	PART NAME	MATERIAL	QTY	FINISHING

单位 UNIT	mm	一般公差 TOLERANCE ARE		浙江恩盛电子有限公司 Zhejiang Ensheng Electronics Co., Ltd.	
绘图 DRAWN		$X \leq 1$	± 0.05		
设计 DESIGN		$1 \leq X \leq 5$	± 0.10	产品名称 TITLE	
审核 CHECKED		$5 \leq X \leq 10$	± 0.15	轻触开关	
校准化 STANDARD		$X > 10$	± 0.25	产品型号 MODEL	6*6*H插件
批准 APPROVALS		重量 WT.		产品编码 PART NO	ES601X-10XX-XXX-26-A
		产地 PRODUCTION		视角 PROJ	
				比例 SCALE	:
				页码 SHEET	1 OF 1